







The symmetric light distribution is ideal for illuminating squares, plazas and other open areas while the asymmetric light distribution is ideal for illuminating streets and pathways.







## Professional Optics

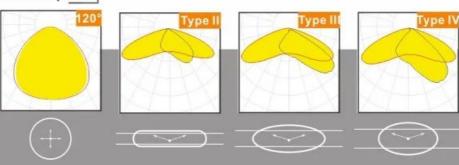

IESNA STANDARD	Roadway width / Mounting Height	
	One side mounting	Both side mounting
Type II	Up to 1 times MH	Up to 2 times MH
Type III	Up to 1.5 times MH	Up to 3 times MH
Type IV	Up to 2 times MH	Up to 4 times MH

