

2400 CONTROL BOARD REPLACEMENT




 Before removing the Control Board and to avoid any static discharge to the Control Board during the replacement of the battery, please take ESD (Electro Static Discharge) precautions.

OPEN FRONT DOOR OF UNIT

REMOVE BLACK METAL COVER (4 X 10MM NUTS)



INTERFACE MODULE 

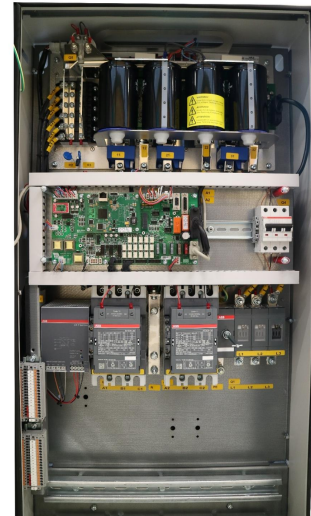

THE CONTROL BOARD IS LOCATED ON THE INTERFACE MODULE - SEE BELOW

REMOVE 4 PHILLIPS HEAD SCREWS AND GENTLY LIFT BOARD

