

2400 DISPLAY BOARD REPLACEMENT




 Before removing the Display Board and to avoid any static discharge to the Display Board during the replacement, please take ESD (Electro Static Discharge) precautions.

OPEN FRONT DOOR OF UNIT



DISPLAY BOARD

- REMOVE CLEAR PLASTIC COVER WITH PHILLIPS SCREWS
- UNPLUG CABLE CONNECTIONS AT BOTTOM
- UNPLUG 2 X RIBBON CABLES
- REMOVE DISPLAY BOARD BY UNSCREWING RETAINING SCREWS

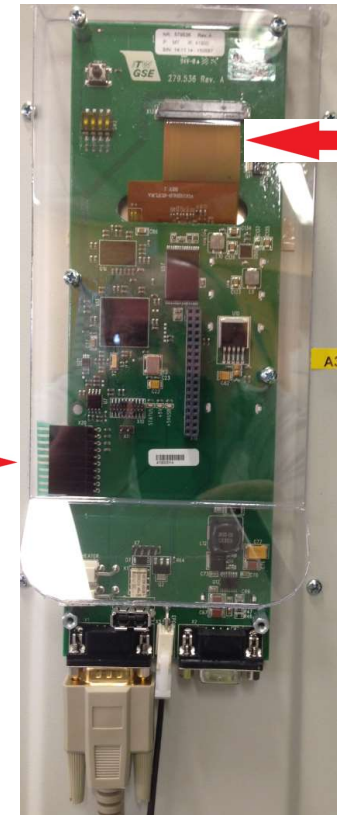

RIBBON CABLE

RIBBON CABLE