



The ProLite T2250MTS 22" Touch Screen is an early adaptor of the new 'MultiTouch' Technology. Based on the latest Optical sensor, the T2250MTS is Windows® 7 Compatible and ready for the emerging business and consumer software packages. The innovative T2250MTS lets you browse the web, email and draw while working on multiple screens, docking and or typing on the on-screen keyboard. You can scroll and rotate pictures, draw, zoom in and out using certain tap, flick, grab and pincer gestures. The multi-touch is not only fast but also fun to work with. The panel features High Definition 1920 x 1080 resolution with a 5msec response time. Analogue and DVI inputs are available for flexible connectivity along with USB for the Touch Interface.

1. DISPLAY CHARACTERISTICS

DIAGONAL	21.5"; 55cm
ASPECT RATIO	16 : 9
PANEL	TN
NATIVE RESOLUTION	Full HD 1080p, 1920 x 1080 (2.1 megapixel)
BRIGHTNESS	260 cd/m ² typical
BRIGHTNESS	300 cd/m ² max.
STATIC CONTRAST	1000 : 1 typical
RESPONSE TIME	5ms
VIEWING ZONE	horizontal/vertical: 170° / 160° ; right/left: 85° / 85° ; up/down: 85° / 75°
DISPLAY COLOUR	16.7 million
TOUCHTECHNOLOGY	optical, multitouch (2 compatible touch points), activated by finger or stylus
GLASS HARDNESS	8H minimum

LIGHT TRANSMITTANCE	88%
DISPLAY AREA H X W	268.11 x 476.64 mm; 10.6" x 18.8"
VIEWING ZONE CR>5	horizontal/vertical: 178° / 178°; right/left: 89° / 89°; up/down: 89 / 89°
PIXEL PITCH H X V	0.248 x 0.248 mm
HORIZONTAL SYNC	31 - 82kHz
VERTICAL SYNC	56 - 75Hz
SYNCHRONIZATION	Separate Sync

2. INTERFACES / CONNECTORS / CONTROLLERS

ANALOG INPUT CONNECTOR	D-Sub
DIGITAL INPUT CONNECTOR	DVI-D
HDCP	yes
OTHER	USB

3. FEATURES

PLUG & PLAY	VESA DDC2B™
CONTROLS	On-Screen-Display in 8 languages (EN, FR, DE, IT, JP, PL, NL, RU) and 5 front controls (Power, Auto, Scroll up/ Brightness/ Contrast, Scroll down/ Volume, Meu/ Select)
USER CONTROLS	brightness, contrast, image control (auto adjust, H. position, V. position, clock, phase, sharpness), colour adjust, OSD control (H. position, V. position, timeout), other (language, input, speaker volume, information), reset, exit
SPEAKERS	2 x 1 W (Stereo)
ANTI-THEFT-DEVICE	Kensington-lock™ prepared
REGULATIONS	CE, TÜV/Bauart, VCCI-B
TILT ANGLE	20° up; 3° down
VESA MOUNTING	100 mm
COLOUR	Black

4. ACCESSORIES

DRIVER	Windows® 7
INCLUDED ACCESSORIES	power cable, D-Sub cable, DVI-D cable, audio cable, USB cable, stand, stylus, quick start guide

5. POWER MANAGEMENT

POWER SUPPLY	AC 100 - 240 V, 50 / 60 Hz
POWER SUPPLY UNIT	internal
POWER USAGE	44 W typical; max. 1 W in Power management mode
POWER MANAGEMENT	VESA DPMS


6. DIMENSIONS / WEIGHT

DIMENSIONS W X H X D

513 x 419 x 263 mm

WEIGHT

6 kg

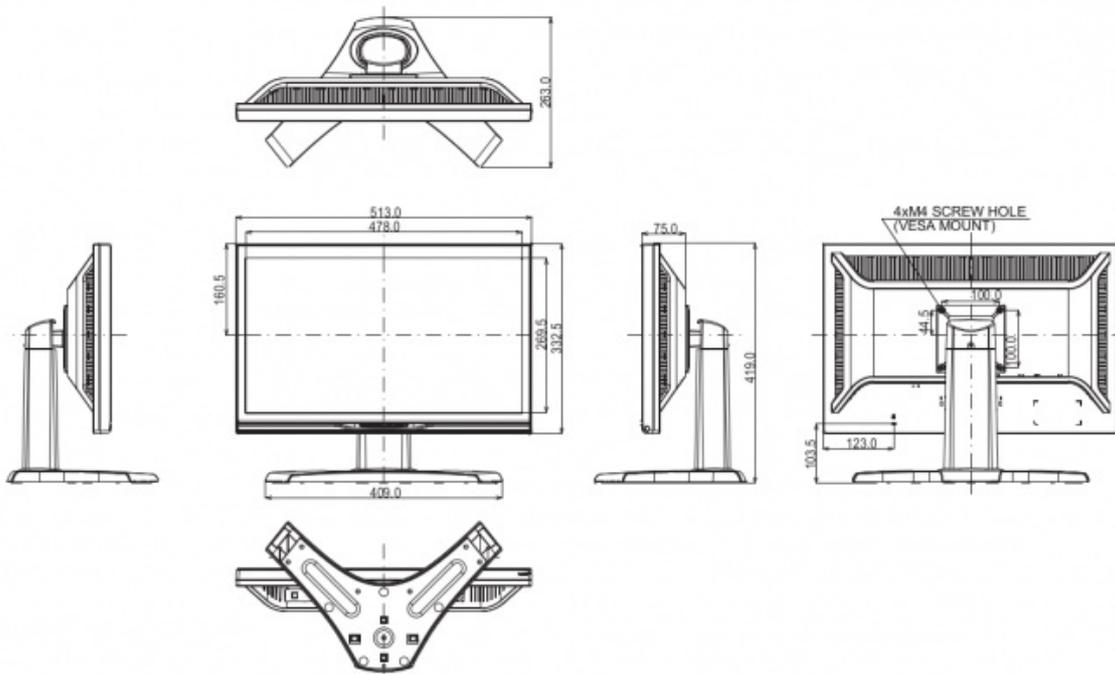

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IYAMA CORPORATION (). ALL RIGHTS RESERVED.