

2021

V2.6

BETTER INSIDE, MORE IN SIGHT



Milesight IoT

Tel: +86-592-5085280

Email: iot.sales@milesight.com

Web: www.milesight-iot.com




PRODUCT CATALOGUE

5G & AIoT



Milesight is a professional IoT company that leverages the top trending technologies to simplify the process of data collection, storage and retrieval in order to accomplish the goal: connecting "things" to the Cloud

Better Inside, More in Sight

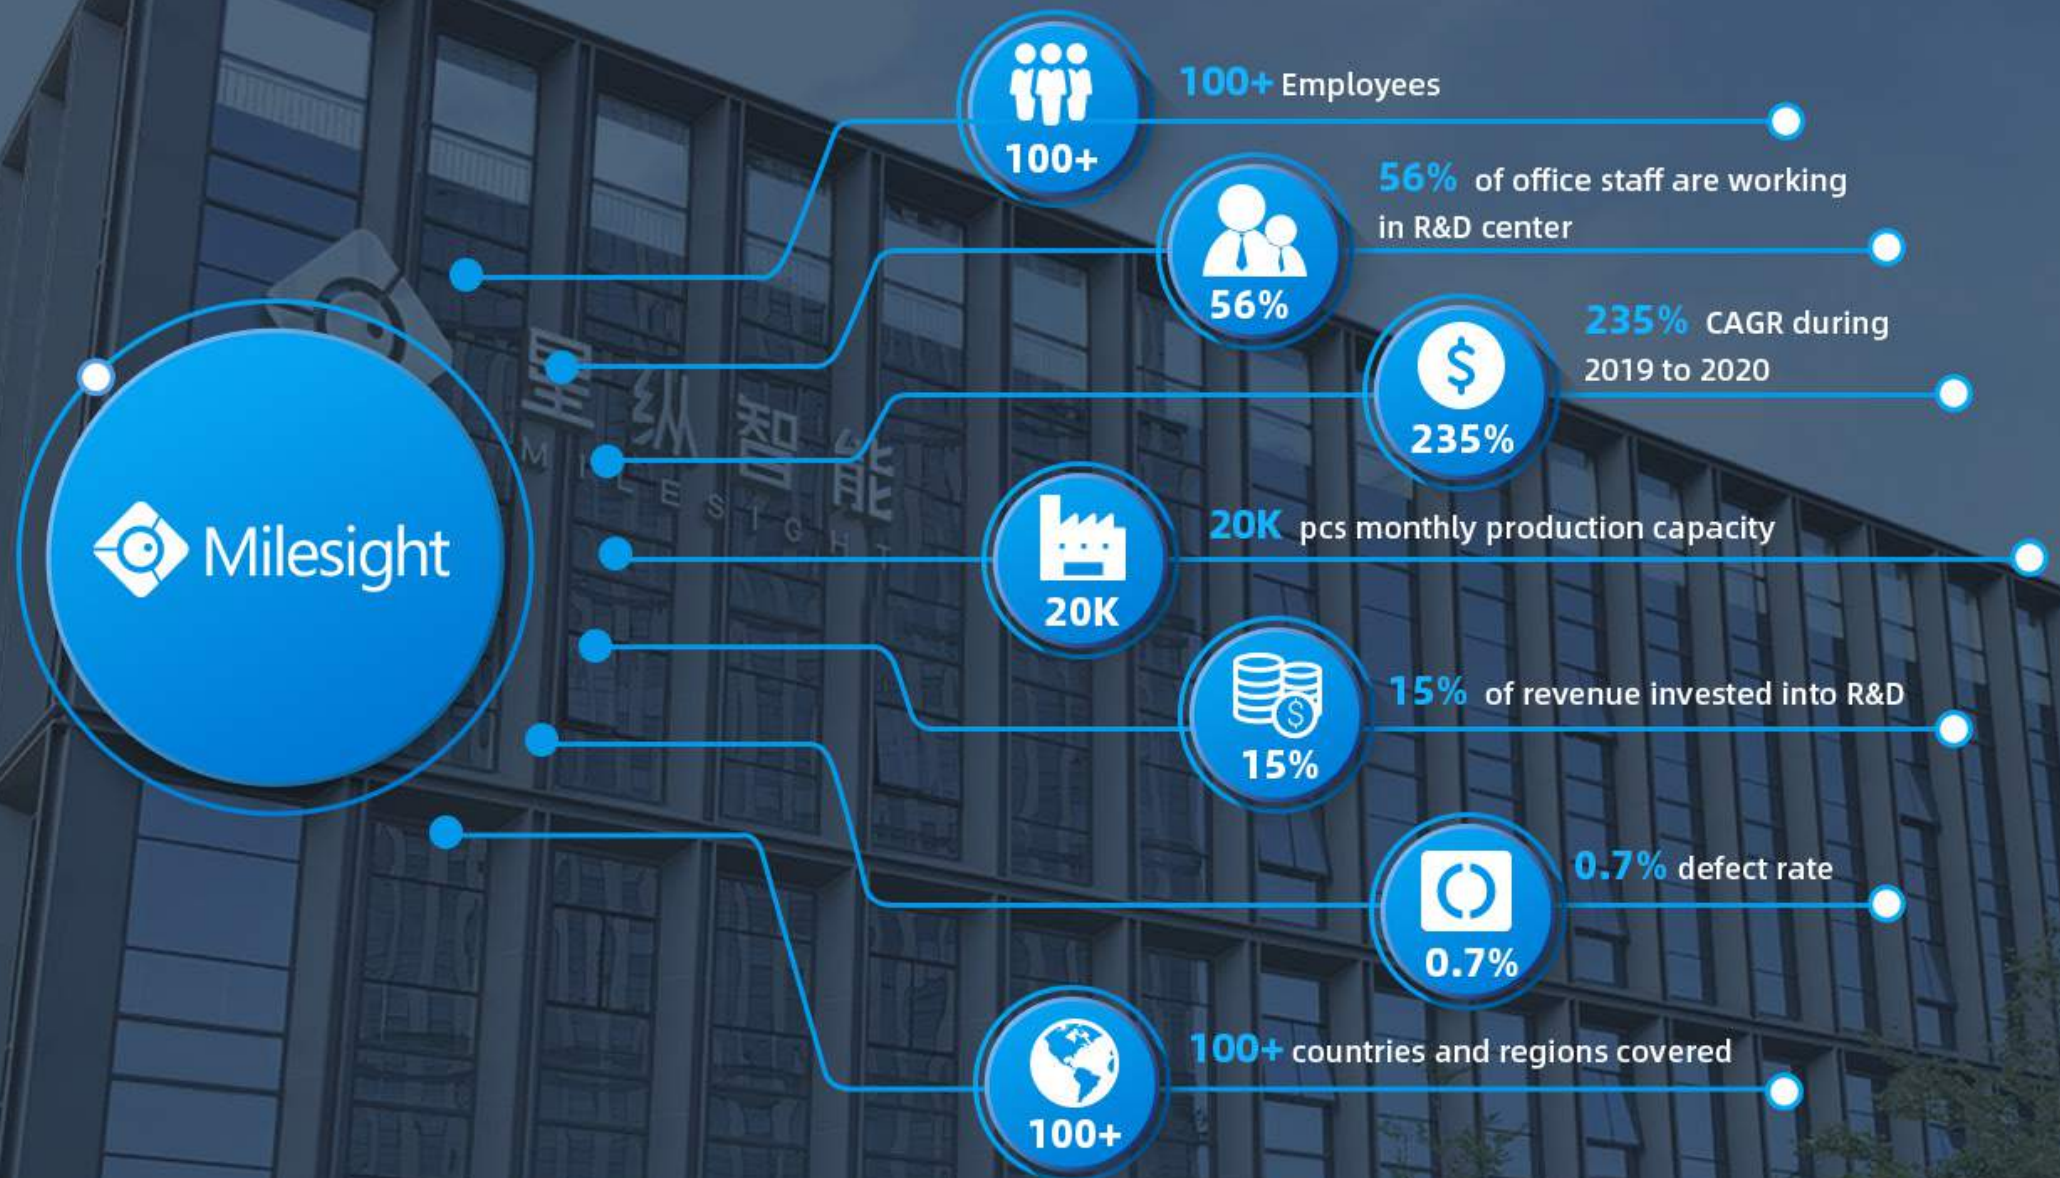

Contents

03 LoRaWAN® Gateway

UG65/UG67



05 Ambience Monitoring Sensor

AM104/AM107
AM307/AM319



09 Environment Monitoring Sensor

Temperature & Humidity Sensor EM300-TH
Leak Detection Sensor EM300-SLD/ZLD
Magnetic Contact Switch EM300-MCS
Ultrasonic Distance/Level Sensor EM310-UDL
Soil Moisture, Temperature and Electrical Conductivity Sensor
EM500-SMTC/SMT
Light Sensor EM500-LGT
Pipe Pressure Sensor EM500-PP
Submersible Water Level Sensor EM500-SWL
Industrial Temperature Sensor EM500-PT100
CO2 Sensor (4 in 1) EM500-CO2
Ultrasonic Distance/Level Sensor EM500-UDL



23 Outdoor LoRaWAN® Controller

Multi-Interface LoRaWAN® Controller UC501/UC502
LoRaWAN® Solenoid Valve Controller UC511/UC512



25 Compact Controller

4G/LoRaWAN®



26 CoWork Series LoRaWAN® Sensor

AI Workplace Sensor VS121
Smart Button WS101
PIR & Light Sensor WS202
Wire-Free Magnetic Contact Switch WS301
Smart Portable Socket WS52x



31 5G CPE

UF51



32 Milesight PoE Switch

Industrial PoE Switch



33 Industrial Cellular Router

Lite Series UR32L
Pro Series UR32 & UR35
Ultra Series UR75 5G



37 Milesight IoT Cloud

Device Management & Data Visualization Platform



38 Connectivity Suite

DeviceHub & MilesightVPN





LoRaWAN[®] Gateway

UG65 Semi-Industrial Gateway/UG67 Outdoor Gateway



Embedded Network Server

- Gateway Fleet for receiving data from multiple Milesight gateways
- Real-time data collection & processing
- Save investment of external network service



Powerful LoRa Capabilities

- Semtech SX1302 LoRa chip
- LoRaWAN[®] Class A/Class B/Class C
- Up to 15 kilometers range
- Support CN470/EU868/US915/AS923 and more



Industrial Design



- IP65/IP67 waterproof
- PoE powered device
- -40°C to 70°C operating temperature









Advanced Gateway Features

- Node-RED development tool for codeless visual programming
- Multicast for sending downlink messages to a group of end-devices
- Noise Analyzer to improve network quality and deployment efficiency

Specifications

Model		UG65	UG67
Product Image			
LoRaWAN	Channel	8	
	Frequency	CN470/RU864/IN865/EU868/US915/AU915/KR920/AS923	
	Sensitivity	-140dBm Sensitivity @292bps	
	Output Power	27 dBm Max	
	Protocol	V1.0/V1.0.2, Class A/Class B/Class C	
Hardware	Processor	Quad-core 1.5G Hz, 64-bit ARM Cortex-A53	
	Memory	512 MB DDR4	
	Flash	8 GB eMMC (pSLC mode)	
	Power Supply	1. 9-24 VDC Jack Connector 2. 1 × 802.3af PoE input	1. 12 VDC with M12 Connector 2. 1 × 802.3af PoE input
	Ingress Protection	IP65	IP67
Connectivity	Cellular (Optional)	1 x SIM Slot, Support Global GSM/3G/4G LTE Frequency Bands	
	Wi-Fi	IEEE 802.11b/g/n	
	Ethernet	1 x 10/100/1000 Mbps	
	GPS	/	Yes

Indoor Ambience Monitoring Sensor

-  Temperature & Humidity
-  Barometric Pressure
-  Activity Level (PIR)
-  TVOC
-  Light
-  CO2



Milesight AM100 Series consists of multiple smart sensors that are built specifically for indoor air quality monitoring. It has a clean and modern design that makes it discrete in indoor ambience.

- **Clean and Modern Design**
Bring “less is more” concept to indoor or HVAC environment
- **Multiple Sensors in One**
Temperature, humidity, activity level (PIR), CO₂, TVOC, barometric pressure
- **Configure with One Touch**
NFC technology enables easy configuration and on/off operation
- **Better Readability than LCD Monitor**
E-ink technology offers high display clarity and sunlight visibility
- **Low Power Consumption**
AA alkaline batteries can last for 1 year and ensure low maintenance cost
- **Smart Screen Mode**
Screen will stop updating data if no motion is detected continuously for 20 minutes, which will save more power and prolong the use life of batteries.
- **Compliant with ToolBox & Milesight IoT Cloud**
Manage and configure your sensor easily


Model			AM107	AM104
Hardware	Frequency		CN470/RU864/IN865/EU868/US915/AU915/KR920/AS923	
	Tx Power		17dBm (470) / 16dBm (868) / 20dBm (915)	
	Sensitivity		-137dBm @300bps	
	Mode		OTAA/ABP	
	Power Supply		2 × AA alkaline batteries/Powered via Type C port	
	Battery Lifetime		Around 1 year	Around 1.5 years
Sensors	Temperature	Range	-20°C to + 70°C	
		Accuracy	±0.3°C (0 ~ 70°C), ±0.6°C (-20 ~ 0°C)	
	Humidity	Range	0% to 100% RH	
		Accuracy	±3% RH (10 ~ 90%), ±5% RH (0 ~ 10%, 90 ~ 100%)	
	PIR	Detection Area	94° Horizontal, 82° Vertical	
		Detection Distance	5 m	
	Light	Range	60000 lux (Visible + IR, IR)	
		Accuracy	±30%	
	CO2	Range	400 ~ 5000 ppm	N/A
		Accuracy	±30 ppm or ±3% of reading	
	TVOC	Range	0 ~ 60000 ppb (total VOC)	
		Accuracy	±15% of reading	
		Long-term Stability	1.3% accuracy drift per year	
	Barometric Pressure	Range	300 ~ 1100 hPa (-40 ~ 85°C)	
		Accuracy	±1 hPa	


LoRaWAN®


AM300 Series



Ambience Monitoring Sensor


Brings on All the Comfort Feels



-  Temperature


 Humidity


 PIR

 Light
-  TVOC

 Barometric Pressure

 CO₂ CO₂
-  PM_{2.5} & PM₁₀

 HCHO

 O₃ O₃



Milesight AM300 series is an all-round ambience monitoring device designed for indoor air quality monitoring. It collects various indoor ambience conditions through 9 built-in sensors, and delivers the data to both mobile App and its 4.2 inch E-ink screen, to help you to understand the indoor comfort & health level visually.




Emoticon Indication

Indicating comfort level by emoticon on screen



Better Screen Display

Light & dark color theme with three display styles



Traffic Light Indicator

Presenting ambience conditions in a tri-color LED



Anti-Theft Design

Preventing the device being taken away thoughtlessly

Specifications					
Model		AM319	AM307		
Hardware	Screen		4.2 inch E-ink		
	LED & Buzzer		1 × Traffic Light Status Indicator, 1 × Buzzer		
	Configuration		NFC (mobile App & NFC reader with PC), USB Type-C port		
	Frequency		CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923		
Work Mode		LoRaWAN® Class C		LoRaWAN® Class A	
Power Supply		5V/1A via Type-C Port		4 × 2700 mAh ER14505 Li-SOCl2 battery	
Sensors	Temperature	Range	-40°C - 85°C		
		Accuracy	± 1°C		
	Humidity	Range	0% - 100% RH		
		Accuracy	± 3%		
	PIR	Detection Area	80 ° Horizontal, 55 ° Vertical		
		Detection Distance	5 m		
	Light	Function	0-60000 Lux		
		Range	Display as 6 levels, 0-5		
	TVOC	Range	0-500 (IAQ Index)		
		Accuracy	±15%		
	Barometric Pressure	Range	300 - 1100 hPa (-40°C - 85°C)		
		Accuracy	±0.6 hPa		
	CO2	Range	400 - 5000 ppm	400 - 2000 ppm	
		Accuracy	±30 ppm or ±3 % of reading	±50 ppm or ±5 % of reading	
	PM2.5 & PM10	Range	0 - 1000 µg/m3	/	
		Accuracy	0-100 (±10µg/m3), 100-1000(±10 %)		
	HCHO*	Range	0 - 6 mg/m3		
		Accuracy	±10 %		
	O3*	Range	0 - 10 ppm		
		Accuracy	±5 % FS		

* HCHO Sensor and O3 Sensor is Alternative on AM319.

Environment Monitoring Sensor

EM300 Series



Featuring a simple yet modern design, compact size and waterproof capability, EM300 series are ideal to fit into the indoor or outdoor environment.



Configure with One Touch
NFC technology enables easy configuration and on/off operation



Low Power Consumption
Dual batteries (one battery by default) can last for up to 10 years



Compliant with ToolBox & Milesight IoT Cloud
Manage and configure your sensor easily



Compact & Waterproof
Small size with an IP67 rating enclosure



LoRaWAN® Wireless
Up to 15 km wireless communication range

EM300-TH Temperature & Humidity Sensor is a sensor suitable for indoor and outdoor temperature and humidity monitoring. It can be widely used in office areas, greenhouses, houses and other environments.

Specifications	
Temperature	±0.3°C (0 ~ 70°C), ±0.6°C (-30 ~ 0°C)
Humidity	±3% RH (10 ~ 90%), ±5% RH (0 ~ 10%, 90 ~ 100%)
Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923
Power Supply	Easily replaceable battery with up to 10 years service life
Operating Temperature	-30 ~ 70°C
Ingress Protection	IP67
Dimensions	88 x 87 x 27 mm (3.46 x 3.42 x 1.06 in)



Office



Greenhouse



Residence



Leak Detection Sensor

Preventing assets away from water damage

EM300-SLD/ZLD offers reliable performance to detect presence of water or other liquids by remotely alerting you the potential water leak before the issue becomes too serious, thus helping to prevent water damage.

Model	EM300-SLD	EM300-ZLD
Sensor Type	Probe	Rope
Cable Length	1.5 m	3 m
Temperature	$\pm 0.3^{\circ}\text{C}$ (0 ~ 70°C), $\pm 0.6^{\circ}\text{C}$ (-30 ~ 0°C)	
Humidity	$\pm 3\%$ RH (10 ~ 90%), $\pm 5\%$ RH (0 ~ 10%, 90 ~ 100%)	
Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923	
Power Supply	Easily replaceable battery with up to 10 years service life	
Ingress Protection	IP67	
Operating Temperature	-30 ~ 70°C	
Dimensions	88 x 87 x 27 mm (3.46 x 3.42 x 1.06 in)	



Hospital



Warehouse



Server Room



Magnetic Contact Switch

Door/window status monitoring

EM300-MCS can be mounted to any door or window to detect an opening or closing event. It adds physical security monitoring to your location by alarming for intrusion or unauthorized entry.

Specifications	
Sensing Distance	20 ~ 30 mm
Cable	ULI 1007 22AWG, 260mm
Temperature	$\pm 0.3^{\circ}\text{C}$ (0 ~ 70°C), $\pm 0.6^{\circ}\text{C}$ (-20 ~ 0°C)
Humidity	$\pm 3\%$ RH (10 ~ 90%), $\pm 5\%$ RH (0 ~ 10%, 90 ~ 100%)
Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923
Power Supply	Easily replaceable battery with up to 10 years service life
Ingress Protection	IP67
Operating Temperature	-30 ~ 70°C
Dimensions	88 x 87 x 27 mm (3.46 x 3.42 x 1.06 in)



Fire Door









Library



Residence



The EM500 Series are LoRaWAN® sensors designed for different professional applications. These sensors adopt a high ingress protection rating enclosure for use in the most challenging outdoor environmental conditions, and are powered by built-in battery for years-long use life.

- 
High IP Rating Enclosure
 IP rated as "dust tight" and protected against heavy fog or powerful jets of water
- 
Rich Installations Available
 Pole mounting, wall mounting, DIN rail mounting
- 
Configure with One Touch
 NFC technology enables easy configuration and on/off operation
- 
Multiple Applications in Vertical Markets
 Soil monitoring, water management, temperature & humidity measurement, etc.
- 
Long Battery Use Life
 19000 mAh replaceable battery ensures low maintenance cost
- 
Compliant with ToolBox Milesight IoT Cloud
 Manage and configure your sensor easily



Soil Moisture, Temperature and Electrical Conductivity Sensor
EM500-SMTC/SMT



Industrial Temperature Sensor
EM500-PT100



Light Sensor
EM500-LGT



Ultrasonic Distance/Level Sensor
EM500-UDL



Pipe Pressure Sensor
EM500-PP



Carbon Dioxide Sensor (4 in 1)
EM500-CO2



Submersible Water Level Sensor
EM500-SWL





EM500-SMTC/SMT provides an external probe for receiving accurate and instantaneous information on soil moisture content, temperature, and electrical conductivity. It is an important tool for soil condition monitoring.

Model	EM500-SMTC	EM500-SMT
Moisture	0 ~100% RH	0 ~ 100% RH
	±2% (0 ~ 50%), ±3% (50 ~ 100%)	±2% RH
	0.01% RH	0.01% RH
Temperature	-40 ~ 80°C	/
	±0.5°C	
	0.1°C	
Electrical Conductivity	0 ~ 20000 µS/cm	/
	±3% (0 ~ 10000 µS/cm), ±5% (10000 ~ 20000 µS/cm)	
	10 µS/cm (0 ~ 10000 µS/cm), 50 µS/cm (10000 ~ 20000 µS/cm)	
Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923	
Power Supply	Built-in 19000 mAh high-capacity battery can be used for 10 years	
Ingress Protection	Transceiver: IP67 Sensor: IP67 (EC5) / IP68 (MEC20)	
Operating Temperature	-30 ~ 70°C (Transceiver), -40 ~ 85°C (Sensor)	-30 ~ 70°C (Transceiver), -40 ~ 60°C (Sensor)



Grassland



Farmland



Greenhouse

EM500-LGT can accurately monitor the changes in the surrounding light intensity. It is suitable for light measurement and research in agriculture, forestry, greenhouse, horticulture, breeding, industrial workshops, warehouses, urban lighting, and buildings.

Specifications	
Range	0 ~ 100000 lux
Accuracy	±3% (Acquired Value)
Resolution	1 lux
Cable length	3 m
Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923
Power Supply	Built-in 19000 mAh high-capacity battery can be used for 10 years
Ingress Protection	Transceiver: IP67 Sensor: IP65
Operating Temperature	-30 ~ 70°C (Transceiver), -30 ~ 60°C (Sensor)



Agriculture



Forestry



Greenhouse Cultivation



Pipe Pressure Sensor

- No leakage danger
- Shock-resistant and vibration-resistant
- Measuring accuracy is less than $\pm 0.5\%$ FS
- Temperature compensation for correction of temperature changes



Submersible Water Level Sensor

- Customizable measuring range up to 200 m
- Submersible pressure sensor not affected by foam, wind, or rain
- IP67 full sealed plastic waterproof design (Transceiver is not included)
- Measuring medium: water (Customizable for oil and other non-corrosive media)

EM500-PP is designed for the pressure monitoring of tank level or leakage in pipes.

Specifications	
Range	0 - 1600 kPa (16 Bar)
Accuracy	$\pm 0.5\%$ FS
Resolution	1 kPa (0.01 Bar)
Pressure Type	Gauge Pressure
Overload	150% FS
Long-term Stability	$\pm 0.3\%$ FS/year
Process Connection	G 1/2" Male
Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923
Power Supply	Built-in 19000 mAh high-capacity battery can be used for 10 years
Ingress Protection	Transceiver: IP67 Sensor: IP65
Operating Temperature	-30 ~ 70°C (Transceiver), -30 ~ 80°C (Sensor)



Constant Water Supply



Hydraulic Equipment



Barometric Pressure Detection

EM500-SWL is designed to measure the tank level or open water applications while fully submerged in liquid. It is robust and sealed to prevent corrosion and failure.

Specifications	
Range	0 ~ 3m/5m/10m (H2O), Customizable up to 200 m and for other liquids
Accuracy	$\pm 0.5\%$ FS
Resolution	0.01 m
Pressure Type	Gauge Pressure
Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923
Power Supply	Built-in 19000 mAh high-capacity battery can be used for 10 years
Ingress Protection	Transceiver: IP67 Sensor: IP68
Operating Temperature	-30 ~ 70°C (Transceiver), -30 ~ 80°C (Sensor)




Reservoir



Tank



Lake

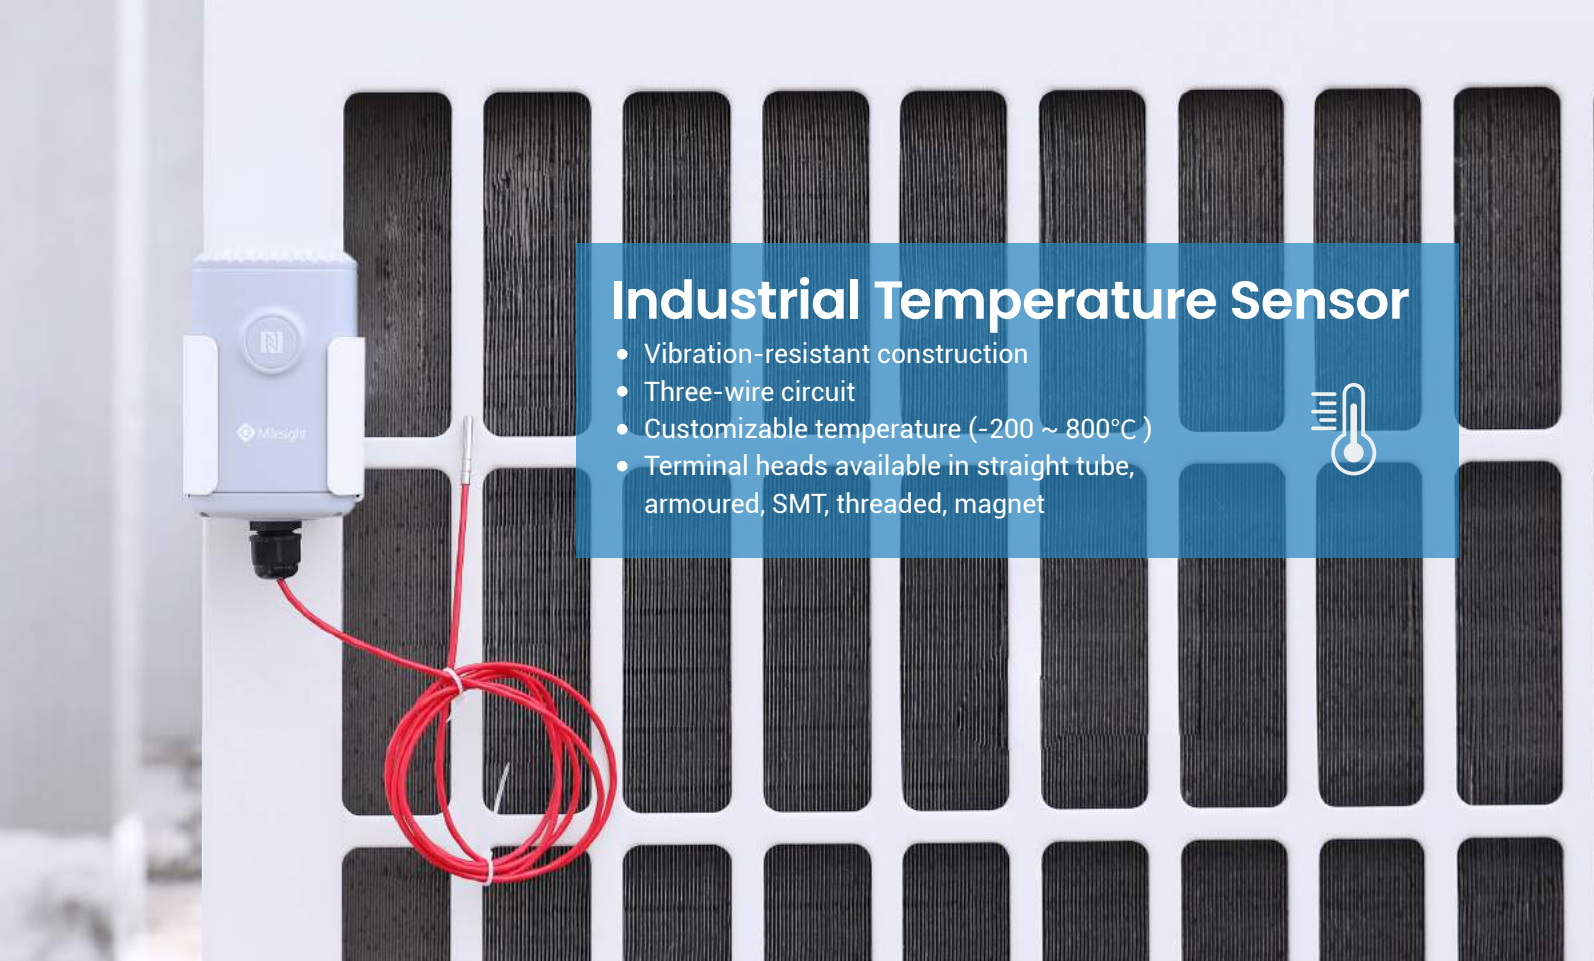

Industrial Temperature Sensor

- Vibration-resistant construction
- Three-wire circuit
- Customizable temperature (-200 ~ 800°C)
- Terminal heads available in straight tube, armoured, SMT, threaded, magnet



CO₂ Sensor (4 in 1)

- Measuring ranges from 400 ppm to 5000 ppm
- Easy installation in any enclosed areas or outdoor environment
- 4 in 1 (CO₂, barometric pressure, humidity, temperature)

EM500-PT100 equips a highly accurate temperature sensor PT100, the platinum resistance temperature detector offers the most stable and precise temperature measurement from -200 to 800°C.

Specifications	
Range	T050: -200 °C to +50 °C T200: -50 °C to +200 °C T500: -50 °C to +500 °C T800: -50 °C to +800 °C (Customizable from -200 °C to +800 °C)
Accuracy	±0.5°C
Resolution	0.1°C
Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923
Power Supply	Built-in 19000 mAh high-capacity battery can be used for 10 years
Ingress Protection	Transceiver: IP67 Sensor: IP68 (T200) / IP30 (T050) / IP30 (T500) / IP30 (T800)
Operating Temperature	-30 ~ 70°C (Transceiver)



Industrial Process



Cold Chain



Laboratory

EM500-CO2 is designed for the application where knowing CO₂ level is important like greenhouse, building ventilation, fruit and vegetable storage. It also supports temperature, humidity and barometric pressure measurement.

Specifications			
Sensor Specs	Range	Accuracy	Resolution
CO2	400 ~ 5000 ppm	±30 ppm or ±3% of reading	1 ppm
Barometric Pressure	300 ~ 1100 hPa (-40 ~ 85°C)	±1 hPa	0.1 hPa
Temperature	-30°C ~ 70°C	±0.6°C (-40 ~ 0°C), ±0.3°C (0 ~ 70°C)	0.1°C
Humidity	0 ~ 100% RH	±3% RH (10 ~ 90%), ±5% RH (0 ~ 10%, 90 ~ 100%)	0.5% RH
Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923		
Power Supply	Built-in 19000 mAh high-capacity battery can be used for 10 years		
Ingress Protection	IP65		
Operating Temperature	-30 ~ 70°C		



Smart City



Livestock Farming



Forest Fire Monitoring



Ultrasonic Distance/Level Sensor

- Measuring ranges from 0.3 m to 10 m
- Measurements in very small containers or openings
- Suitable for measuring benign and chemical mediums
- Non-contact detection for any corrosive liquid chemicals or combustibles



LoRaWAN® Ultrasonic Distance/Level Sensor




EM500-UDL provides highly accurate distance measurement for a variety of applications in harsh environments like flood monitoring, wastewater management, fill level monitoring in grains or fertilizer. The measurement is based on ultrasonic waves transmitted and reflected back from nearby objects.

Specifications	
Range	W050: 0.3 ~ 5 m W100: 0.5 ~ 10 m
Accuracy	±1% FS
Resolution	1 mm
Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923
Power Supply	Built-in 19000 mAh high-capacity battery can be used for 10 years
Ingress Protection	IP67
Operating Temperature	-30 ~ 65°C



Water Treatment

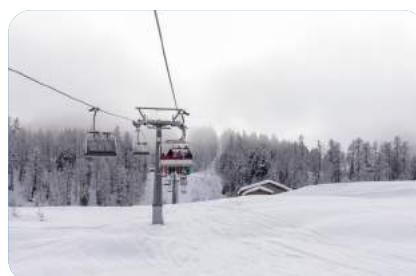

Snow Depth



Grain Silo

Milesight EM310-UDL is an ultrasonic sensor featuring short blind zone and broad range distance measurement. It also has a 3-axis accelerometer to detect the device motion when it is moved or fell down, which is ideal for monitoring of solid or liquid level of containers like waste bin.

Specifications	
Ultrasonic Sensor	Range: 3 - 450 cm, 60° Accuracy: $\pm(1+0.3\% \times S)$, S = distance
Accelerometer	Normal/Tilt (device position detection)
Configuration	NFC (mobile App & NFC reader with PC)
LoRaWAN® Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923
Power Supply	2 × 3500 mAh ER17505 Li-SOCl ₂ battery
Battery Life	Built-in 1650 mAh battery to use for over 5 years with around 20 triggers per day
Ingress Protection	IP67
Operating Temperature	-15°C to +60°C



Waste Bin



Manhole Cover



Parking Lot

Outdoor LoRaWAN® Controller

Feature-Rich SensorHub for Connecting Sensors for Connecting Sensors




The UC50x Series LoRaWAN® Controller is a fully integrated and battery-powered LoRaWAN® node with solar panel and multiple communication interfaces for connecting to a wide range of external sensors. With quick installation and easy maintenance, the UC50x Series LoRaWAN® Controller is ideal to work in harsh environments for remote monitoring and collecting data from sensors.

Model	UC501	UC502
Power Supply	Rechargeable 4900 mAh battery with solar panel	Non-rechargeable Built-in 19000 mAh Li-SOCl2 battery
Interface 1	2 × GPIO 1 × RS485/RS232 switchable 1 × 3.3 V output 1 × 5/9/12 V output switchable	
Interface 2	2 × analog input 1 × 3.3 V output 1 × 5/9/12 V output switchable	
Dimension	120.1 × 120.1 × 55.4 mm (4.73 × 4.73 × 2.18 in)	
Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923	
Ingress Protection	IP67	
Operating Temperature	-20 ~ 60°C	

LoRaWAN® Solenoid Valve Controller



Empower Automatic & Precision Irrigation

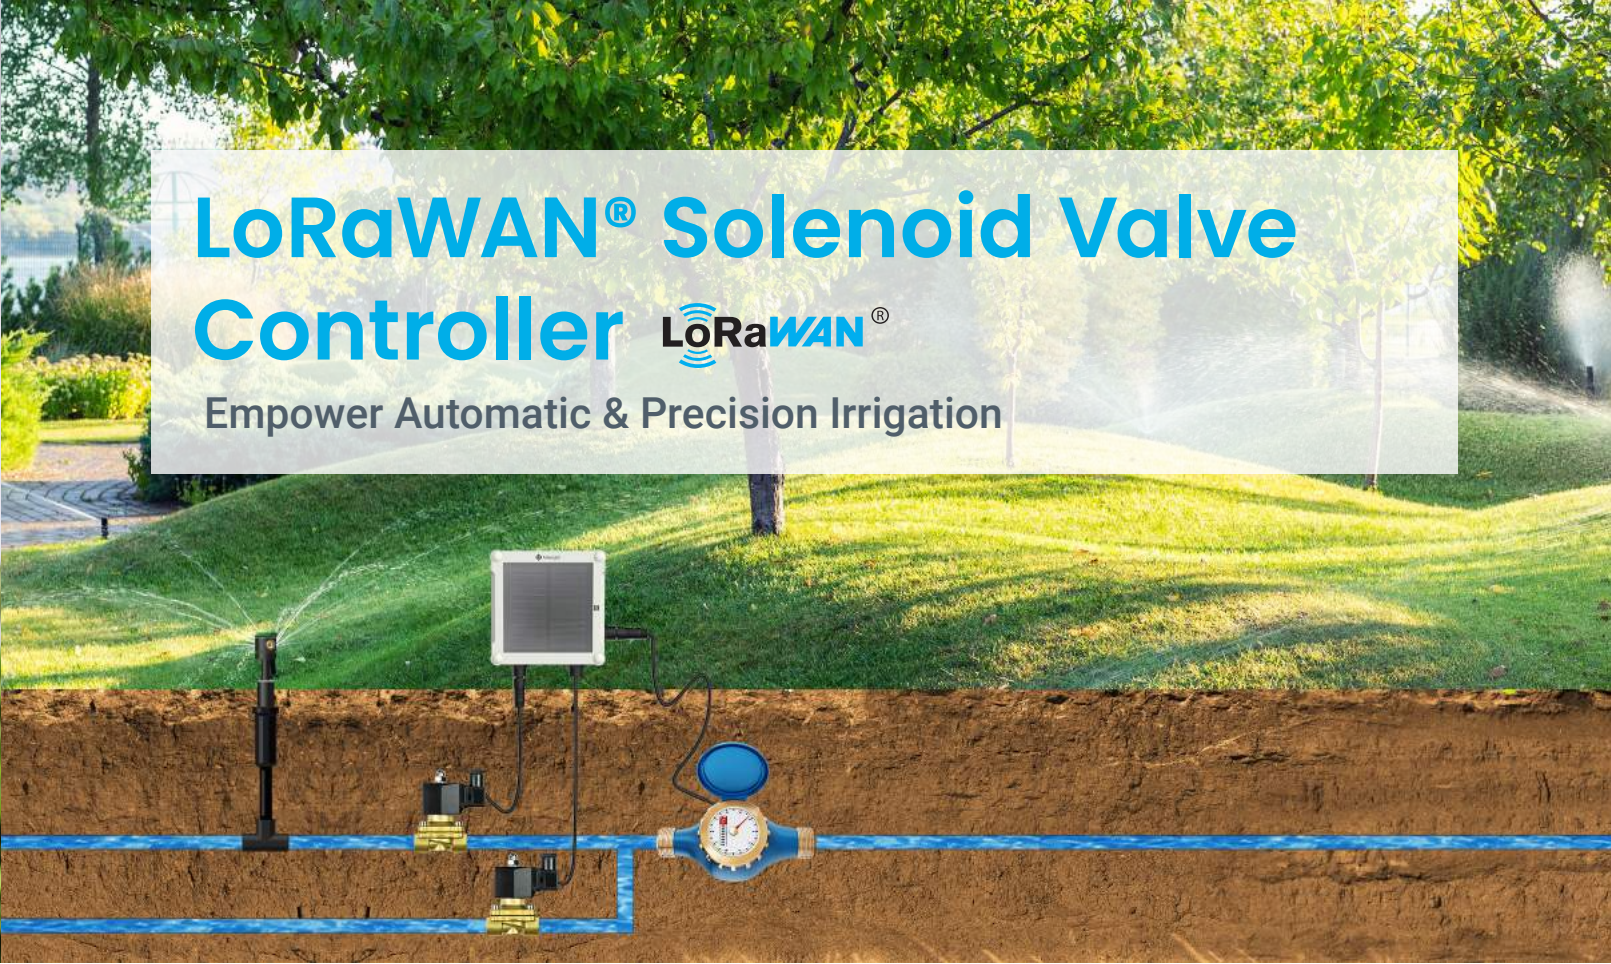

The UC51x Series LoRaWAN® Solenoid Valve Controller provides seamless ultra long range access capability for common irrigation valves. With Milesight IoT Cloud, the valve can be remotely controlled from anywhere at any time. Moreover, the embedded pulse counter feature enables the device to monitor flow easily, as well as to make irrigation precisely.



Solenoid Valve Control

- Time-Based Open/Close
- Volume-Based Open/Close



Flow Monitoring

- Connecting up to 2 Meters
- Configurable Volume per Pulse



Long Term Reliability

- IP67 Waterproof
- 3-Year Battery Life

Model	UC511	UC512
Power Supply	Rechargeable 4900 mAh battery with solar panel 1 month battery life without charging (Class C)	Non-rechargeable Replaceable 19000 mAh Li-SOCl2 battery Up to 3-year battery life (Class A)
Solenoid Interface	2 × 2-Wire 12 VDC Latching Solenoid	
Pulse Interface	2 × Pulse Input	
Dimension	120.1 × 120.1 × 55.4 mm (4.73 × 4.73 × 2.18 in)	
Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923	
Ingress Protection	IP67	
Operating Temperature	-20 ~ 60°C	

Compact Controller

The Compact Controller is designed for monitoring and controlling field devices, and collecting data onto cloud.



Specifications

Model	Analog Input	Digital Input	Relay Output	RS232	RS485	Network
UC1114	—	2	2	—	—	LoRaWAN®
UC1122	2	1	1	—	—	
UC1152	—	1	1	1	1	
UC3414	—	2	2	—	—	2G/3G/4G
UC3422	2	1	1	—	—	
UC3452	—	1	1	1	1	



Milesight VS121 is an AI powered workplace sensor featuring LoRaWAN® technology. It complies with GDPR and uses anonymous people counting data to help you see and understand your workspace utilization.

- Anonymous Detection**
No facial detection technology being applied nor PII collected
- Large Detection Area**
Covering up to 5 meters radius at 3 meters height

- High Recognition Rate**
95% recognition rate to determine objects as human or non-human
- Custom Detection Region**
Define 12 custom mapped regions as detection/non-detection region

Specifications	
Field of View	190°Horizontal, 112°Vertical
Recognition Rate	>95%
Wi-Fi	IEEE 802.11b/g/n, as AP for configuration only
LoRaWAN® Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923
Power Supply	5V/1.5A by Type-C Port
Ingress Protection	IP30
Operating Temperature	-5 ~ +55°C

LoRaWAN® CoWork Series Smart Button



The WS101 LoRaWAN smart button is an ultra-tiny device that allows you to remotely control appliances, triggering a scene or calling for help as whatever and wherever you need it.

- Single/Double/Long Press Mode
- Buzzer & LED Light for Status Indication
- Easy Configuration via NFC
- Over 6 Years Battery Life

Specifications	
Button	1 × Action Button (white and red optional)
Press Mode	Single press, double press, long press
Configuration	NFC (mobile App & NFC reader with PC)
LoRaWAN® Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923
Power Supply	Built-in 1650 mAh battery to use for over 5 years with around 10 presses per day
Ingress Protection	IP30
Operating Temperature	-30°C to +60°C

LoRaWAN® CoWork Series PIR & Light Sensor



Combined the PIR motion detection technology and brightness measurement, Milesight WS202 can easily determine whether an indoor space is being used by human or not, thus providing reliable support for automatic lighting control system.

- Ultrawide Range Detection
 - 120° Horizontal
 - 100° Vertical
 - Up to 8 m distance
- Smart Brightness Measurement
 - 1 lux resolution
 - Measurement from 1 to 60000 lux
 - Custom Bright/Dark conditions threshold

Specifications	
PIR Sensor	120°Horizontal, 100°Vertical Maximum 8 m distance
Light Sensor	1 to 60000 lux (Determine as Bright or Dark according to custom threshold)
Configuration	NFC (mobile App & NFC reader with PC)
Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923
Power Supply	Built-in 1650 mAh battery to use for around 5 years with 30 triggers per day
Ingress Protection	IP30
Operating Temperature	-30°C to +60°C

LoRaWAN[®]

CoWork Series

Magnetic Contact Switch



WS301

The WS301 is a 100% wire-free magnetic contact switch to be easily installed on a door or window to detect the opening or closing event, and report alarms over the LoRaWAN[®] network. The minimal magnet is placed inside the portable part, while the sensor is inside the fixed part on door, window or other object.

- Easy Installation**
Double sided tape/Screw
- LED Indicator**
Open/close, tamper and low battery alarm
- NFC Enabled**
Configure device easily and wirelessly
- 2-Year Battery Life**
1200 mAh replaceable battery
- Tamper Detection**
Detect any attempt of tamper and report
- Milesight IoT Cloud**
Compliant with Milesight IoT Cloud

Specifications	
Detection Distance	15-20 mm
Button	1 × Power Button (Internal), 1 × Tampering Button
Power Supply	1 × 1200 mAh ER14250 Li-SOCl2 battery
Dimensions	Sensor: 50 × 30 × 17 mm (1.97 × 1.18 × 0.67 in) Magnet: 30 × 17 × 8 mm (1.18 × 0.67 × 0.31 in)
Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923
Ingress Protection	IP30
Operating Temperature	-20 ~ 60°C

LoRaWAN[®]

CoWork Series

Smart Portable Socket



WS52x

WS52x is a LoRaWAN[®] Smart Portable Socket for the monitoring and control of electronic appliances. It helps the owner to improve the management efficiency, as well as to reduce the manpower & electricity cost with its remote scheduled on/off control capability and power consumption measurement.

- Remote ON/OFF**
- Time-Based ON/OFF**
- Power Consumption Measurement**
- Overload Protection**

Specifications	
Socket & Plug Type	Type A, Type B, Type C, Type G, Type I, etc.
Operating Voltage	100~250 VAC, 50~60 Hz
Max Load Capacity	10 A/16 A (Optional), 250 VAC
Measurement	Voltage (VAC), Current (mA), Power Factor (%), Power (W), Power Consumption (kWh)
Configuration	NFC (mobile App & NFC reader with PC)
LoRaWAN Frequency	CN470/RU864/IN865/EU868/AU915/US915/KR920/AS923
Ingress Protection	IP30
Operating Temperature	-20°C to +60°C



Milesight UF51 5G CPE features aesthetic design and outstanding performance with IP67 rating to delivers fast 5G connectivity, higher bandwidth, and low latency to more businesses.



Fast 5G Connectivity

- 2.5 Gbps Downlink
- 4 × 4 MIMO
- NSA & SA Modes



Dual Band Wi-Fi

- 1.733 Gbps Peak Speed
- IEEE 802.11b/g/n/ac
- 2 × 2 MIMO



Outstanding Performance

- Quad-Core Processor
- 512 MB DDR3 RAM
- 8 GB Flash



Flexible Installation

- Desktop Installation
- Wall & Pole Mounting
- Bottom Screw & Magnet Mounting

Milesight PoE Switch





Simplify Network Deployment with Power over Ethernet



Milesight PoE switch is a highly-dependable device that transmits data and power simultaneously, which helps to eliminate the need for a separate power supply when you are installing devices with great difficulty to access or without power outlet.


Versatile Ports

With a wide range of PoE ports from 4, 8, 16 to 24 at maximum, and 2 SFP ports

4-Port PoE Switch	8-Port PoE Switch	16-Port PoE Switch	24-Port PoE Switch
 4 × 10/100 Mbps PoE ports + 2 × 100 Mbps uplink ports	 8 × 10/100 Mbps PoE ports + 2 × 100 Mbps uplink ports	 16 × 10/100 Mbps PoE ports + 2 × 100 Mbps uplink ports	 24 × 10/100 Mbps PoE ports + 2 × 100 Mbps uplink ports




Zero Configuration



250 m
Extend Mode



Up to 14.8 Gbps
Switching Capacity



Maximum 400 W
Power Budget



4 kV
Surge Protection

UR32 Lite Lite Series

Industrial Cellular Router

UR32 Lite (UR32L) is a featured industrial router that secures reliable cellular-to-ethernet connectivity for IoT applications, such as kiosk, self-service terminals and process automation equipment. Powered by DeviceHub, a remote management platform, UR32 Lite simplifies your process of setup, mass configuration, maintenance and support.



UR32L



Reliable Connectivity
Major carriers and LTE support make it easy to get connected globally



Remote Management
Gain easy setup, mass configuration, maintenance and support on remote locations



Mighty Mite
Combine compact size with powerful ability to provide high performance and reliability

UR32&UR35 Pro Series

Industrial Cellular Router

Rugged & Programmable 4G Router



UR32

UR35



High Performance

- NXP Industrial Grade Processor
- -40°C to 70°C Operating Temperature
- Support Wi-Fi, GPS, Serial, I/Os and Voice



Low Maintenance & Easy Operation

- User-friendly GUI
- MilesightVPN for Remote Access
- DeviceHub Central Management



Intelligent & Programmable

- Python Programming
- Support Modbus RTU/TCP



Lower Investment


- Affordable Price
- PoE-PSE for Less Wire Connection
- Reduce Time Cost by Remote Management

UR75 High-Performance

Ultra Series

5G Industrial Router

Featuring the latest and fastest cellular technology - 5G, UR75 is not only an intelligent industrial IoT router, but also an unrivaled wireless networking solution.



Outstanding Performance

- 5G NSA & SA Modes
- Qualcomm Quad-Core Processor
- CAT4/6/12/20 Cellular Modem (Optional)



Rich Connectivities

- 2 × 2 MIMO 802.11ac Wi-Fi
- 1 × RS232 + 1 × RS485
- 1 × Digital Input & Output



Edge Intelligence


- Azure IoT Edge
- AWS Greengrass
- Python Programming

Specifications

		UR32L		UR32	UR35	UR75	
Interfaces	SIM Slots	1		2			
	Ethernet Ports	2 x 10/100 Mbps			5 x 10/100 Mbps	5 x 10/100/1000 Mbps	
	Serial Ports	N/A		1 x RS232 or 1 x RS485	1 x RS232 + 1 x RS485	1 x RS232 + 1 x RS485	
	DI/DO	N/A		1 x DI + 1 x DO			
	Voice	N/A			1 x FXS (RJ11)	N/A	
	Antenna Connectors	1 x Cellular Connector	2 x Cellular Connectors 1 x Wi-Fi /GPS Connector		2 x Cellular Connectors 1 x Wi-Fi Connector 1 x GPS Connector	3 x Cellular Connectors 1 x Cellular/GPS Connector 2 x Wi-Fi Connectors	
Network	Cellular	4G CAT4				5G, 4G CAT4/6/9/12/20 (Optional)	
	Wi-Fi (Optional)	N/A		IEEE 802.11b/g/n		IEEE 802.11a/b/g/n/ac	
	Serial Port	N/A		Transparent (TCP Client/Server, UDP), Modbus Gateway (Modbus RTU to Modbus TCP), Modbus Master			
	Network Protocols	PPP, PPPoE, SNMP v1/v2c/v3, TCP, UDP, DHCP, RIP v1/v2, OSPF, DDNS, VRRP, HTTP, HTTPS, DNS, ARP, QoS, SNTP, Telnet, VLAN, SSH					
	AAA	RADIUS, TACACS+, LDAP, Local Authentication					
	Firewall	URL Filtering/ACL/DMZ/Port Mapping/MAC Binding/SPI/DoS Protection					
	Reliability	VRRP, WAN Fail-over, Dual SIM Backup					
	VPN	OpenVPN, IPsec, PPTP, L2TP, DMVPN, GRE					
Maintenance	Management	Web, CLI, SMS, Watchdog, On-demand Dial Up					
	Multilevel Authority	Multiple Levels of User Authority					
Capabilities	CPU	528 MHz, 32-bit ARM Cortex-A7				716 MHz, Quad-Core ARM Cortex-A7	
	Flash	128 MB				8 GB	
	Memory	128 MB DDR3				512 MB DDR3	
	Built-in	Watchdog					
	GPS (Optional)	N/A		GPS + GLONASS			
	Extended Memory	N/A		1 x micro SD card slot, up to 128 GB		1 x M.2 NVMe SSD Slot	
Hardware	Power Input	9 ~ 48 VDC					
	Power Output (Optional)	2 x 802.3af/at PoE PSE			4 x 802.3af/at PoE PSE		
	Ingress Protection	IP30					
	Housing & Weight	Metal, 246g (0.54 lb)		Metal, 271 g (0.60 lb)	Metal, 481 g (1.06 lb)	Metal, 525 g (1.16 lb)	
	Dimensions	108 x 90 x 26 mm			135 x 100 x 45 mm	135 x 118 x 45 mm	
	Mounting	Desktop, Wall or DIN Rail Mounting					
Others	Operating Temperature	-40°C to +70°C (-40°F to +158°F) Reduced cellular performance above 60°C					
	Storage Temperature	-40°C to +85°C (-40°F to +185°F)					
	Relative Humidity	0% to 95% (non-condensing) at 25°C/77°F					
	Certifications	RoHS, CE, FCC		RoHS, CE, FCC, PTCRB, AT&T, RCM, SPDDI, NBTC	RoHS, CE, FCC		
	Frequency Band	E	LTE: B1/B3/B5/B7/B8/B20/B38/B40/B41			3G: B1/B5/B8	GSM: B3/B8
		AF	LTE: B2/B4/B5/B12/B13/B14/B66/B71			3G: B2/B4/B5	N/A
		AU	LTE: B1/B2/B3/B4/B5/B7/B8/B28/B40			3G: B1/B2/B5/B8	GSM: B2/B3/B5/B8
500GL		5G NR: N1/N2/N3/N5/N7/N8/N12/N20/N28/N41/N66/N71/N77/N78/N79			LTE FDD: B1/B2/B3/B4/B5/B7/B8/B9/B12/B13/B14/B17/B18/B19/B20/B21(TBD)/B25/B26/B28/B29/B30/B32/B66/B71 LTE TDD: B34/B38/39/B40/B41/B42/B48		

Milesight IoT Cloud

The Milesight IoT Cloud provides unparalleled levels of vertical integration with Milesight LoRaWAN[®] gateways, sensors and controllers. It visualizes field data and enables user to monitor and control remote assets on an intuitive dashboard.

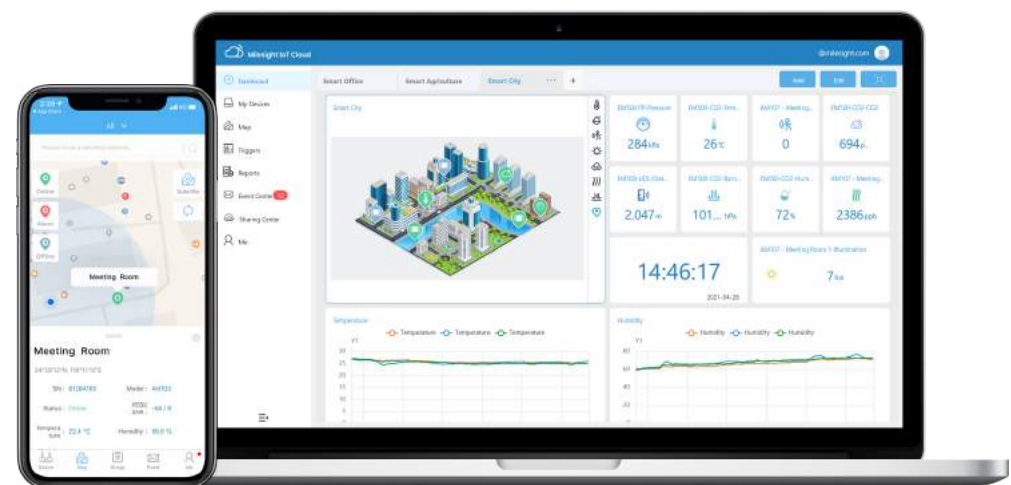

Visualization

Transform real-time and historical data into drag-and-drop widgets on dashboard



Alerts

Enable email and mobile push notifications based on triggered events



Monitoring & Control

Control access and monitor your projects from anywhere




Security & Reliability

Built on AWS to provide the most confidential and reliable infrastructure for your data

Connectivity Suite

Applicable to Industrial Cellular Router and LoRaWAN[®] Gateway

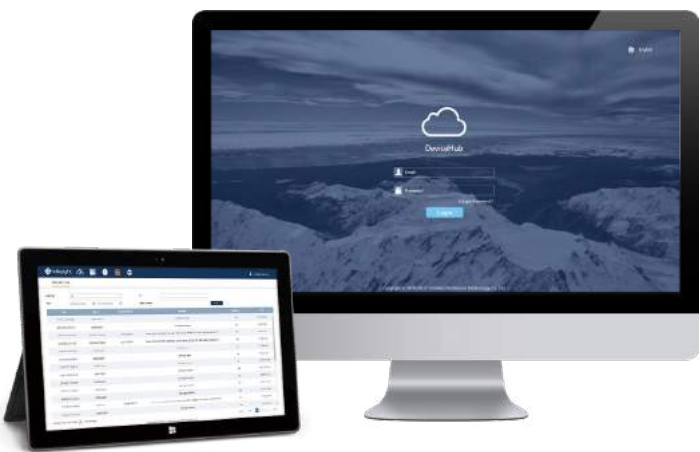

Milesight DeviceHub is a web-based platform that lets you manage all your Milesight routers and gateways from a single location at any time.

The Milesight DeviceHub is able to monitor all critical parameters of remote routers and gateways, perform configuration, upgrade firmware, analyze system log, create graphic reports and more. It helps to improve productivity, reduce costs, and enhance the intelligence of your network and business operations.

MilesightVPN is the core component of Milesight VPN solution. Typically it's hosted on your own server.

Software Requirements

- ✓ OS: Ubuntu 20.04
- ✓ Supports installation package
- ✓ Browser: Chrome, Firefox

Hardware Requirements

Your host hardware must meet the following minimum requirements:

- | For 500 devices | For 1000 devices |
|-----------------|------------------|
| ✓ RAM: 16 GB | ✓ RAM: 32 GB |
| ✓ Disk: 512 GB | ✓ Disk: 1 TB |



Milesight IoT Product Naming Convention

Industrial Cellular Router & 5G CPE

UR32 - L 04 EU - G - P - W - RS485

①

②

③

④

⑤

⑥

① Model Name

- UR32L
- UR32
- UR35
- UR75
- UF51

② Cellular Network Type

- L: 4G LTE
- 5: 5G

③ Modem Manufacturer & Model

④ Operating Region

- EU: EMEA/South Korea/Thailand/India
- AU: Latin America/Australia/New Zealand
- AF: North America FirstNet
- GL: Global

⑤ Function (for routers only)

- G: GPS
- P: PoE
- W: Wi-Fi

⑥ RS485 (for UR32 only)

- Add RS-485 Serial Interface

LoRaWAN® Gateway

UG65 - L 04 EU - 915M - EA

①

②

③

④

⑤

⑥

① Model Name

- UG63
- UG65
- UG67

② Cellular Network Type

- L: 4G LTE

③ Modem Manufacturer & Model

④ Operating Region

- EU: EMEA/South Korea/Thailand/India
- AU: Latin America/Australia/New Zealand
- AF: North America FirstNet

⑤ LoRaWAN® Module

- 470M: CN470
- 868M: RU864/IN865/EU868
- 915M: US915/AU915/KR920/AS923

⑥ External Antenna

LoRaWAN® Sensor

EM500 – UDL 915M

①

②

③

① Model Name

- AM104
- AM107
- AM307
- AM319
- EM300
- EM310
- EM500

② Sensor Type

- UDL: Ultrasonic Distance/Level Sensor
- SMTc/SMT: Soil Sensor
- SWL: Submersible Water Level Sensor
- LGT: Light Sensor
- PT100: PT100 Temperature Sensor
- CO₂: CO₂ Sensor
- PP: Pipe Pressure Sensor
- TH: Temperature & Humidity Sensor
- MCS: Magnetic Contact Switch Sensor
- SLD: Spot Leak Detection Sensor
- ZLD: Zone Leak Detection Sensor

③ LoRaWAN® Module

- 470M: CN470
- 868M: RU864/IN865/EU868
- 915M: US915/AU915/KR920/AS923

LoRaWAN® Controller

UC511 – DI - 915M

①

②

③

① Model Name

- UC501
- UC502
- UC511
- UC512
- UC1114
- UC1122
- UC1152

② Interface (For UC51x Only)

- Digital Input (Pulse Counter)

③ LoRaWAN® Module

- 470M: CN470
- 868M: RU864/IN865/EU868
- 915M: US915/AU915/KR920/AS923

CoWork Series

LoRaWAN® AI Workplace Sensor

VS 1 2 1 – 915M

①

②

③

④

① Vision Sensor

② MegaPixel

③ Sub-series

④ LoRaWAN® Module

LoRaWAN® Smart Button

WS 10 1 – 915M

①

②

③

① Workplace Sensor

② Number of Buttons

③ LoRaWAN® Module

LoRaWAN® PIR & Light Sensor

WS 20 2 – 915M

①

②

③

① Workplace Sensor

② Number of Sensors

③ LoRaWAN® Module

LoRaWAN® Magnetic Contact Switch

WS 30 1 – 915M

①

②

③

① Workplace Sensor

② Sub-series

③ LoRaWAN® Module

LoRaWAN® Smart Portable Socket

WS 52 3 – 915M

①

②

③

① Workplace Sensor

② Number of Holes

③ LoRaWAN® Module

Industrial PoE Switch

MS – S0 2 04 – E L MS – S0416 – G F

①

②

③

④

⑤

⑥

① Uplink Port and SFP Port

- 2: 2 × Uplink Ports
- 4: 2 × Uplink Ports + 2 × SFP Ports

② Number of PoE Ports

③ Fast Uplink Port (10/100 Mbps)

④ Extend Mode

⑤ Gigabit Uplink Port (10/100/1000 Mbps)

⑥ Optical Fiber Port (SFP)