


# S20-3HY Inline Hygienic Style 3A Certified

## Example application

Measures 0-20% milk fat. 3" Triclover fitting.  
Install directly into food product lines.



## Dimensions

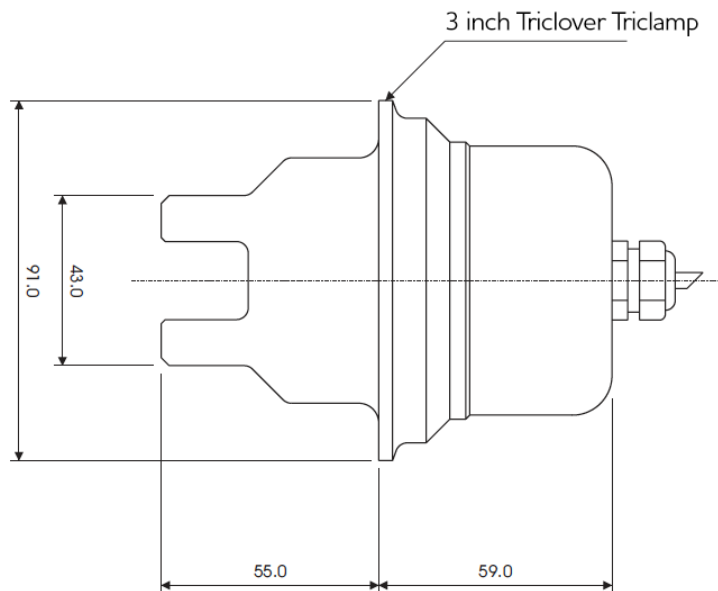

## Key features



### SELF-COMPENSATING

Multi-beam sensor, virtually eliminates drift due to contamination or electronic ageing.



### ONE-PIECE BODY

No lenses to leak, glass-free design.



### SIMPLE TO USE

Simple user interface



### RELIABLE

Accurate, repeatable & reliable.

## Example applications

**Hygienic style sensors are designed for installation directly into food product lines where CIP cleaning is used.**

Most commonly used sensor in a wide range of applications including solids recovery, CIP control, fat percentage monitoring, separator control, and loss monitoring.

### Milk fat



(the measuring range will vary according to media and particle characteristics)

## Further specifications

### ACCURACY

+/- 2% of reading

### REPEATABILITY

+/- 1% of reading

### TEMPERATURE

0 to 85°C operating range

### PRESSURE

10 Bar

### CABLE

Polyurethane-covered cable rated to 95°C. Extension cables can be supplied to extend the cable up to 50m.

### TRANSMITTER

Quadbeam MXD75 or MXD73

## Model no. selection guide

### BASIC MODEL NO.:

**S20** - Measuring range 0 - 20% milk fat\*.

\*the measuring range will vary according to media and particle characteristics

### BODY STYLE

**3HY** - Hygienic Style body with 3" Triclover fitting

### WAVE LENGTH

**880** - 880nm Standard. Other wave lengths available

### BODY MATERIAL

**PP** - Polypropylene

### CABLE

**10** - Both immersion and hygienic sensors are supplied with a 10m cable as standard. Other lengths available

### CONNECTOR

**NC** - No Connector. Cores stripped and crimped for direct connection with the MXD Transmitters

**CA** - Amphenol Connector. For use with Hygienic sensors using extension cables.

**Sample model no: S20-3HY-880-PP-10-NC**

## Quadbeam Technologies Ltd – Contact us

Email – [info@quadbeam.com](mailto:info@quadbeam.com)

Call US – (303) 923 5273

Call international – +64 9 238 4609

Call NZ – 09 238 4609