



AstroSemi™

Incredible Power for Small Body

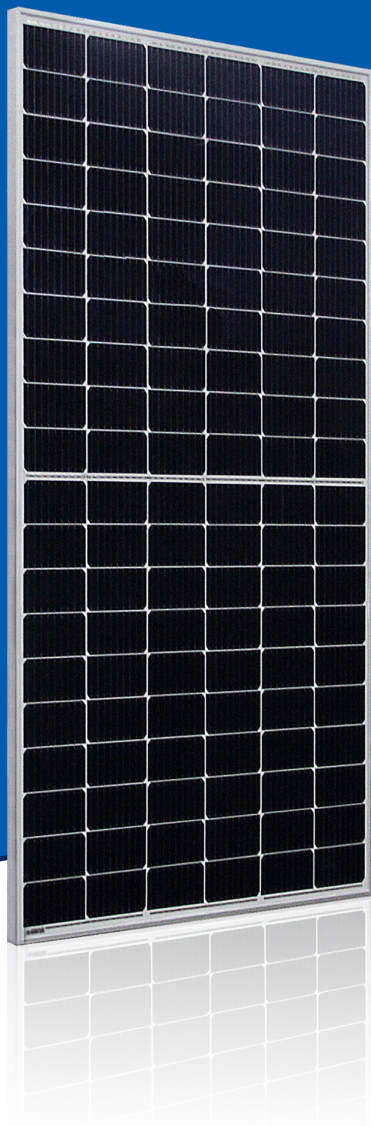

350W~360W

Monocrystalline PV Module
CHSM60M-HC Series (166)

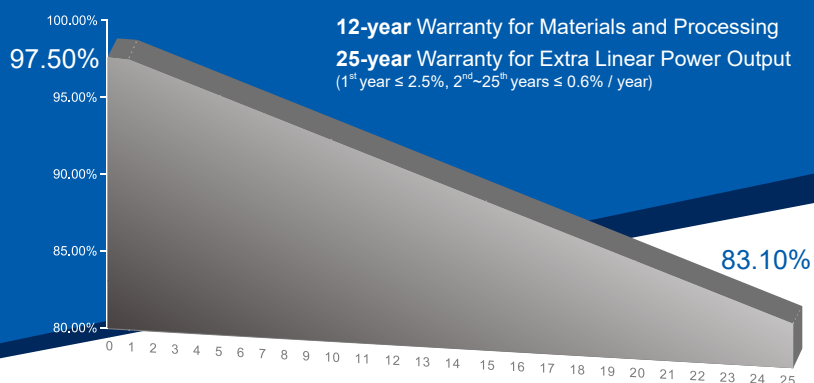

KEY FEATURES

- OUTPUT POSITIVE TOLERANCE**
 Guaranteed 0~+5W positive tolerance ensures power output reliability.
- INNOVATIONAL HALF-CELL TECHNOLOGY**
 Improves the module output, decreases the risk of micro-crack, enhances the module reliability.
- REDUCE SHADOW LOSS**
 Effectively reduces the effect of shadow on the module surface.
- REDUCE INTERNAL MISMATCH LOSS**
 Reduces mismatch loss and improves output.

COMPREHENSIVE CERTIFICATES



Special for Australian Market



ASTRONERGY
A CHNT COMPANY

ELECTRICAL SPECIFICATIONS



STC rated output (P_{mpp})*	350 Wp	355 Wp	360 Wp
Rated voltage (V_{mpp}) at STC	32.99 V	33.24 V	33.49 V
Rated current (I_{mpp}) at STC	10.61 A	10.68 A	10.75 A
Open circuit voltage (V_{oc}) at STC	39.49 V	39.80V	40.14V
Short circuit current (I_{sc}) at STC	11.08 A	11.15 A	11.21 A
Module efficiency	18.9%	19.2%	19.5%
Rated output (P_{mpp}) at NMOT	261.0 Wp	264.7 Wp	268.5 Wp
Rated voltage (V_{mpp}) at NMOT	30.76 V	30.99 V	31.22 V
Rated current (I_{mpp}) at NMOT	8.49 A	8.54 A	8.60 A
Open circuit voltage (V_{oc}) at NMOT	37.12 V	37.42 V	37.74 V
Short circuit current (I_{sc}) at NMOT	8.91 A	8.97 A	9.02 A
Temperature coefficient (P_{mpp})	- 0.3438%/°C		
Temperature coefficient (I_{sc})	+0.0353%/°C		
Temperature coefficient (V_{oc})	- 0.2722%/°C		
Nominal module operating temperature (NMOT)	44±2°C		
Maximum system voltage (IEC/UL)	1500V _{DC}		
Number of diodes	3		
Junction box IP rating	IP 67		
Maximum series fuse rating	20 A		

* Measurement tolerance +/- 3%

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

NMOT: Irradiance 800W/m², Ambient Temperature 20°C, AM=1.5, Wind Speed 1m/s

CURVE

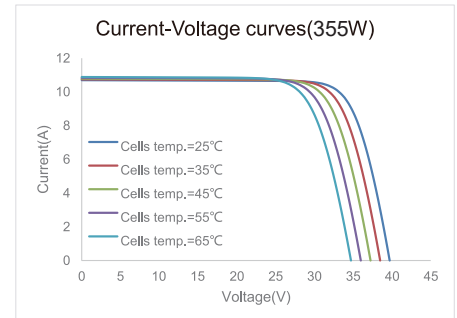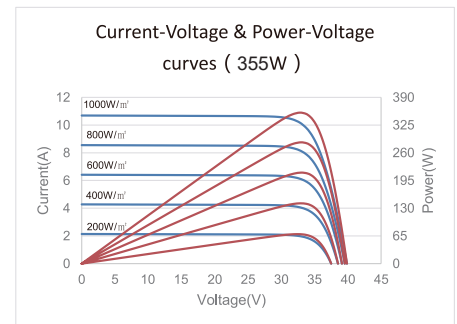

MECHANICAL SPECIFICATIONS

Outer dimensions (L x W x H)	1765 x 1048 x 35 mm 69.49 x 41.26 x 1.38 in
Frame technology	Aluminum, silver anodized
Module composition	Glass / EVA / Backsheet (white)
Front glass thickness	3.2 mm / 0.13 in
Cable length (IEC/UL)	Portrait: 350 mm (13.78 in) Landscape: 1200 mm (47.24 in)
Cable diameter (IEC/UL)	4 mm ² / 12 AWG
① Maximum mechanical test load	5400 Pa (front) / 2400 Pa (back)
Fire performance (IEC/UL)	Class C (IEC) or Type 1 (UL)
Connector type (IEC/UL)	PV-CY03L (Logo:CHUANG YUAN) or PV-HCB40(Logo:XINHUI) or MH5 (Logo:MINGHE) or PV-KST4-EVO2/XY-UR,PV-KBT4-EVO2/XY-UR(Logo:MC)


① Refer to Astronergy crystalline installation manual or contact technical department.
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load

PACKING SPECIFICATIONS

① Weight (module only)	20.0 kg / 44.09 lbs
② Packing unit	31 pcs / box
Weight of packing unit (for 40'HQ container)	659 kg / 1453 lbs
Number of modules per 40'HQ container	806 pcs

① Tolerance +/- 1.0kg
② Subject to sales contract

MODULE DIMENSION DETAILS

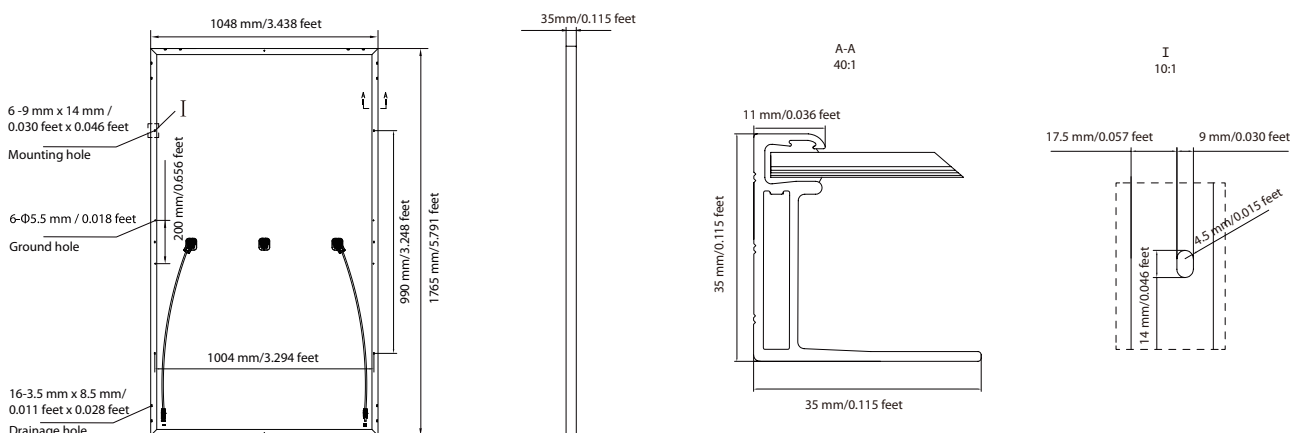

Made in Zhejiang, Jiangsu and Anhui of China, Made in Sincan/ Ankara of Turkey

© Chint Solar (Zhejiang) Co., Ltd. Reserves the right of final interpretation, please contact our company to use the latest version for contract.

<http://energy.chint.com>