



ASTRONERGY



ASTRO N5s


CHSM54N(BLH)-HC
Monofacial Series

415~435W

Warranty

25 25-year Product Warranty
(special for rooftop market)

30 30-year Linear Power Warranty

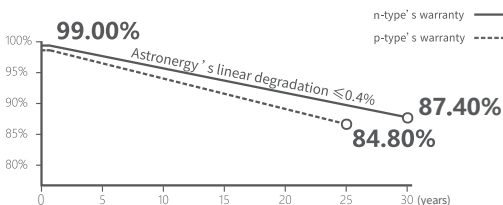

Key Features

- High efficiency n-type TOPCon cells
- Manufacturing with AI technology
- Suitable for residential systems
- Easy to install and transport



CE ISO 9001:2015:ISO Quality Management System
ISO 14001:2015:ISO Environment Management System
ISO 45001:Occupational Health and Safety



Tier 1
BloombergNEF



415~435W

POWER RANGE

0~+3%

POWER SORTING

22.3%

MAX MODULE
EFFICIENCY

≤ 1.0%

FIRST YEAR
POWER DEGRADATION


≤ 0.4%

YEAR 2-30
POWER DEGRADATION

Mechanical Specifications

Outer dimensions (L x W x H)	1722 x 1134 x 30 mm
Cell type	n-type mono-crystalline
No. of cells	108 (6*18)
Frame technology	Aluminum, black anodized
Front glass thickness	3.2 mm
Cable length (Including connector)	Portrait: (+)350 mm, (-)250 mm; Customized length
Cable diameter (IEC/UL)	4 mm ² / 12 AWG
① Maximum mechanical test load	5400 Pa (front) / 2400 Pa (back)
Connector type (IEC/UL)	PV-HCB40 (Astronergy) or PV-KST4-EVO2A/ xy, PV-KBT4-EVO2A/xy (Stäubli)
Module weight	21.3 kg
Packing unit	36 pcs / box
Weight of packing unit (for 40'HQ container)	811 kg
Modules per 40' HQ container	936 pcs (Subject to sales contract)

① Refer to Astronergy crystalline installation manual or contact technical department.
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.

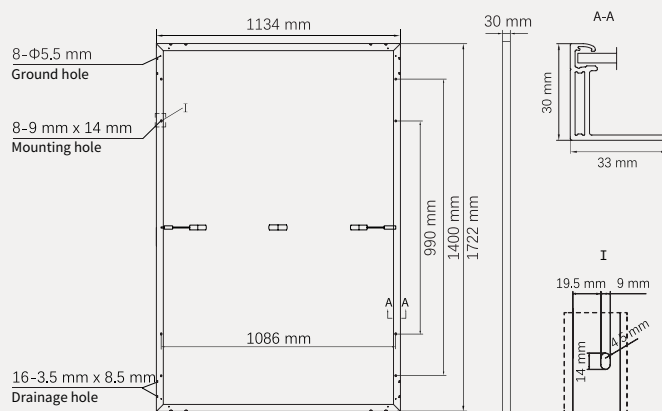

Electrical Specifications CHSM54N-HC-XXX(XXX=415、435)

STC: Irradiance 1000W/m², Cell Temperature 25° C, AM=1.5

Rated output (P _{mpp} / W _p)	415	435
Rated voltage (V _{mpp} / V)	32.77	33.49
Rated current (I _{mp} / A)	12.66	12.99
Open circuit voltage (V _{oc} / V)	38.93	39.77
Short circuit current (I _{sc} / A)	13.48	13.82
Module efficiency	21.3%	22.3%

NMOT: Irradiance 800W/m², Ambient Temperature 20° C, AM=1.5, Wind Speed 1m/s

Rated output (P _{mpp} / W _p)	313.0	328.1
Rated voltage (V _{mpp} / V)	30.81	31.47
Rated current (I _{mp} / A)	10.16	10.42
Open circuit voltage (V _{oc} / V)	36.98	37.77
Short circuit current (I _{sc} / A)	10.91	11.19

Power tolerance: +/- 3%


Temperature Ratings (STC) Operating Parameters

Temperature coefficient (P _{mpp})	-0.29%/°C	No. of diodes	3
Temperature coefficient (I _{sc})	+0.043%/°C	Junction box IP rating	IP 68
Temperature coefficient (V _{oc})	-0.25%/°C	Max. series fuse rating	25 A
Nominal module operating temperature (NMOT)	41±2°C	Max. system voltage (IEC/UL)	1500V _{DC}


Fire performance: Class C

Curve


Current-Voltage (435W)

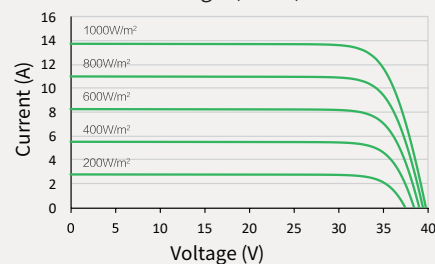

Power-Voltage (435W)

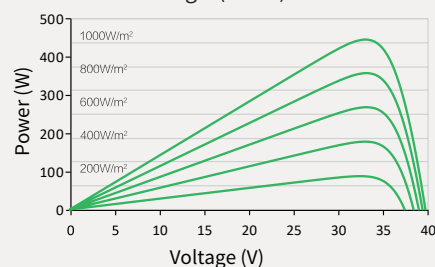

Current-Voltage (435W)

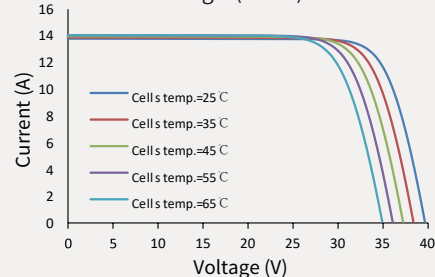

Made in China, Made in Thailand.

© Chint New Energy Technology Co., Ltd. Reserves the right of final interpretation. please contact our company to use the latest version for contract.

<http://www.astronergy.com.au>

202408