




**CHNT**  
**POWER**

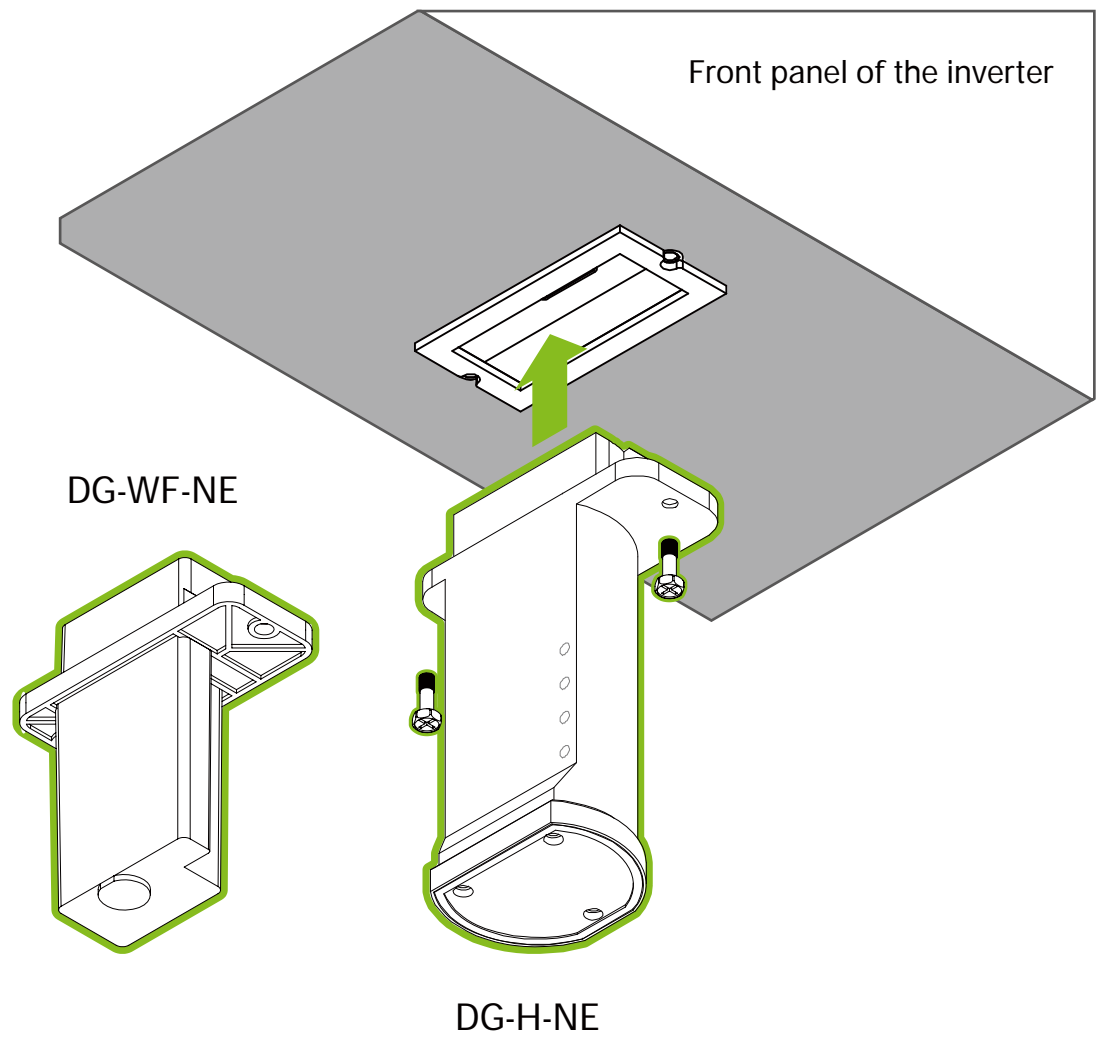

## Quick Guide for Dongle Gateway

06/30/2023

Revision 8

# Table of Contents

---

|  |    |
|--|----|
| <b>Hardware Quick Guide</b>  | -  |
| Specifications   | 3  |
| Typical System Design  | 6  |
| Installation   | 7  |
| Initialize Related Devices   | 9  |
| ADV Settings - Changing the Device's Registers                                 | 15 |
| ADV Settings - Changing the Gateway's Parameters                               | 16 |
| <b>How To Use the APP To Manage "My Portfolio"</b>                             | -  |
| Create a "Master Account" for "My Portfolio"                                   | 20 |
| The Concept of "Portfolio Owner" / "O&M Partner"                               | 21 |
| Create "Sub-Portfolio" (Why Can't I Create Them)                               | 23 |
| ( Portfolio Owner ) End User, How To Create "Project/Site"                     | 24 |
| ( Portfolio Owner ) End User, Bind/Unbind "O&M Partner" To "Project/Site"      | 25 |
| ( Portfolio Owner ) End User, How To Unbind "Project/Site" From "My Portfolio" | 26 |
| ( Portfolio Owner ) End User, Edit the Profile of "Project/Site"               | 27 |
| ( Portfolio Owner ) End User, Check Basic Site Data                            | 28 |
| ( Portfolio Owner ) End User, Check Basic Device Event                         | 29 |
| ( Portfolio Owner ) End User, Remotely Change the Device's Registers           | 30 |
| ( Portfolio Owner ) End User, Remotely Change the Gateway's Parameters         | 31 |

---

---

|  |    |
|--|----|
| <b>"Portfolio Owner" Basic Functions</b> | -  |
| Assign the Site To An Account            | 32 |
| Move the Gateway To A Site               | 33 |
| Batch Add New Gateway SN                 | 34 |
| <b>"O&amp;M Partner" Basic Functions</b> | -  |
| What is "Service Code"                   | 35 |
| Use API to Integrate/Develop             | 36 |

---

## Warranty Policy

- The warranty policy of this product is specified in the contract; otherwise, the standard warranty is 2 years.
- For warranty terms, please refer to the [CPS](#) accessories warranty policy in place at time of purchase.

# Safety Precautions



## NOTICE

Before performing operations, read through this manual and follow all the precautions to prevent accidents. The safety precautions provided in this document do not cover all the safety precautions. CPS shall not be liable for any consequence caused by the violation of the safety operation regulations and design, production, and usage standards.

---

### Declare

CPS shall not be liable for any consequence caused by any of the following events.

#### Transportation

- The storage conditions do not meet the requirements specified in this document.
- Violate the operation instructions and safety precautions in this document for installation, cable connecting, and maintenance.

#### Operation in extreme environments which are not covered in this document.

- Unauthorized modifications to the product or software code.
- Installation or use in environments which are not specified in related international standards.
- Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### Personal Requirements

- Only qualified electrical technicians are allowed to install and operate the **dongle gateway**.
- Operation personnel should receive professional training.
- Operation personnel should read through this document and follow all the precautions.
- Operation personnel should be familiar with the safety specifications about the electrical system.
- Operation personnel should understand the composition and working principles of the grid-tied PV power system and local regulations.

# Product Specifications

|                            | DG-H-NE                | DG-WF-NE        |
|----------------------------|------------------------|-----------------|
| <b>Inverter Interface</b>  |                        |                 |
| No. of Ports               | 1 ( DB9 )              | ✓               |
| Protocol                   | Modbus RTU             | ✓               |
| Modbus RTU Mode            | Master                 | ✓               |
| <b>WLAN Interface</b>      |                        |                 |
| WLAN Standard              | 802.11 b/g/n           | ✓               |
| Frequency Band             | 2.4 GHz                | ✓               |
| Wireless Security          | WEP, WPA/WPA2          | ✓               |
| Antenna                    | Built-in               | ✓               |
| <b>Bluetooth Interface</b> |                        |                 |
| Standard                   | BLE 4.2                | ✓               |
| Antenna                    | Built-in               | ✓               |
| <b>Cellular Interface</b>  |                        |                 |
| Cellular Standards         | LTE-FDD/LTE-TDD, WCDMA |                 |
| No. of SIM Slot            | 1                      |                 |
| Cellular Antenna           | Built-in               |                 |
| <b>Power Parameters</b>    |                        |                 |
| Input Voltage              | 4.5 to 8 Vdc           | 3.6 to 5.5 Vdc  |
| Power Consumption          | 1 W, Max. 2.5 W        | 1 W, Max. 2.5 W |

---

**Environment Limits**

---

Operating Temperature -20 °C to 60 °C , Natural convection

---

Storage Temperature -40 to 85°C

---

Ambient Relative Humidity 5 to 85% (non-condensing)

---

**Physical Characteristics**

---

Housing Plastic

---

IP Rating IP 65

---

Dimensions 115 mm / 70 mm / 30 mm (4.52 in x 2.76 in x 1.18 in)

---

Weight 50g ( 0.11 lb )

---

**Standards and Certifications (DoC)**

---

CE-EMC EN 55032

---

EN 55035

---

EN 61000-3-2

---

EN 61000-3-3

---

CE-RED EN 301 908

---

EN 300 328

---

EN 301 489-1 / -17 / -52

---

EN 62368-1

---

CE-LVD EN 62368-1

---

FCC SDoC Part 15B


---

FCC ID Part 15C

---

# Typical System Design

## One-to-one

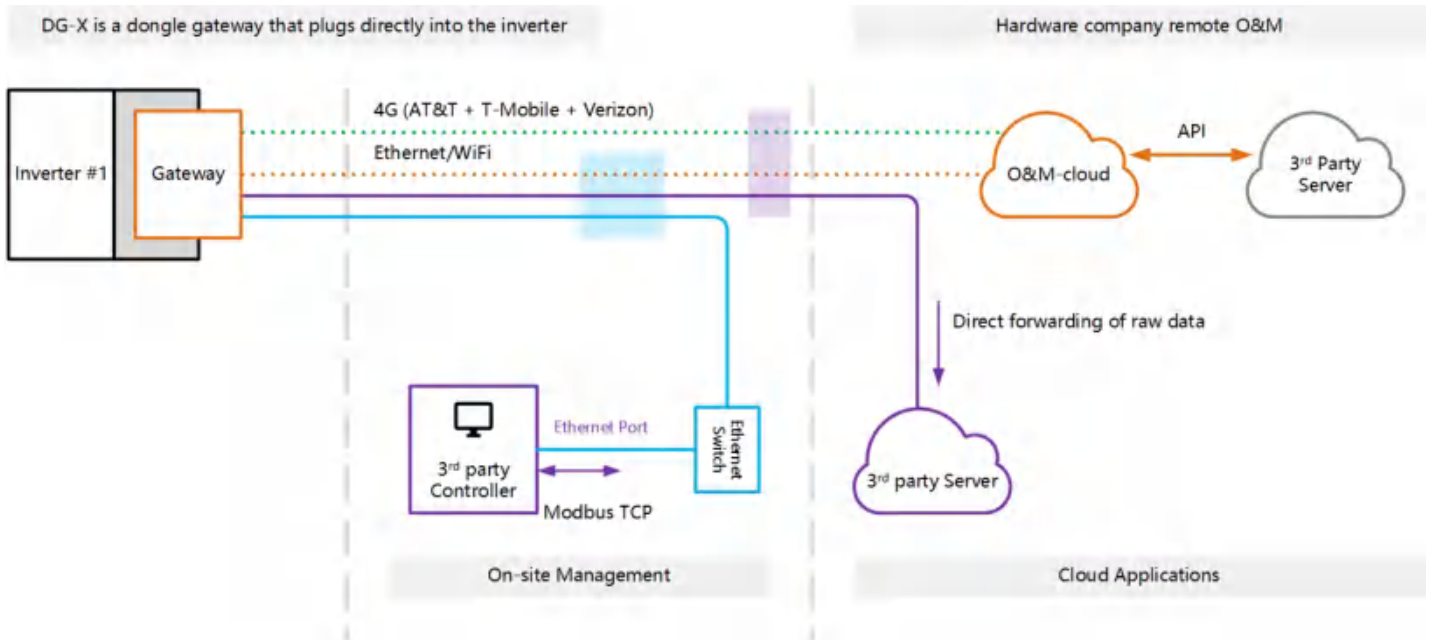


### Model : DG-H-NE / DG-WF-NE

The DG-H-NE / DG-WF-NE One-to-one connection to a single inverter/ESS, connected to the cloud platform via WiFi or 4G.


The DG-H-NE is capable of storing **30 days** of offline data if the Internet is disconnected, and the DG-WF-NE is capable of storing **5 days**.

# Hardware Installation

## LED Indicators ( DG-H-NE )

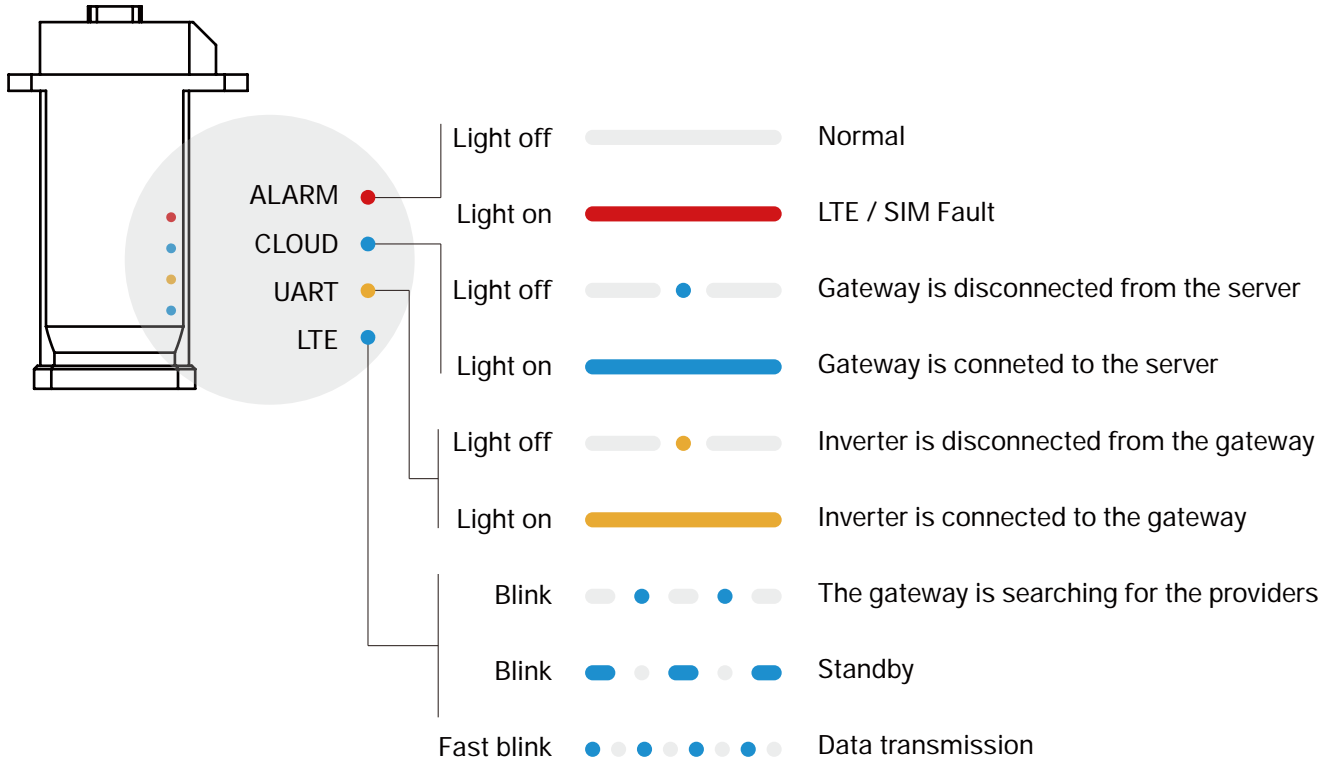

## LED Indicators ( DG-WF-NE )

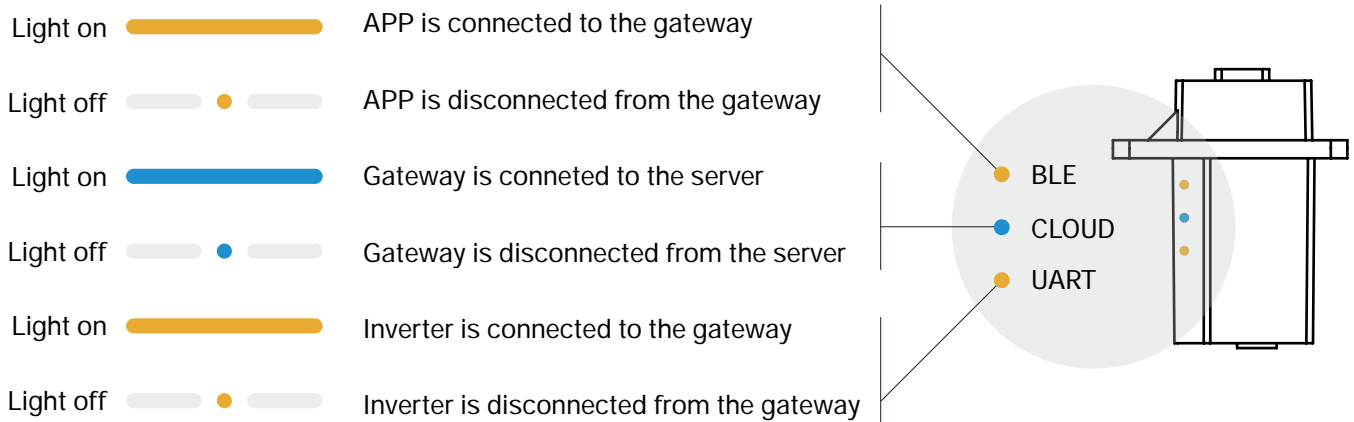



## Notice:

**CPS SIM** can only be used in **CPS gateway**.

By default, **CPS Gateway** support customers' unrestricted use of the existing and future remote O&M functions of **CPS Portal**.

**SO DATA PLAN CONSUMPTION STATISTICS ARE NOT PROVIDED.**

At the same time, **CPS gateway** does not guarantee the 3rd party SIM card. The user needs to manually enter the APN.

**CPS SIM** card supports local provider's network. e.g. AT&T + T-mobile + Verizon at the same time in USA.

After the gateway is powered on and works normally, it will select and connect to the provider network with the strongest or most stable signal.

**CPS gateway** uses essentially the same initialization logic and interaction interface across the entire product family.


# Initialize Related Devices

Scan the QR-code to complete APP download and installation by using the mobile phones that can access the Internet. Or search for "Chint Connect" in Apple Store and Google Play.




The Android/iPhone user interface may look slightly different but the setup procedure will be the same as shown.


## Check the Internet Connection

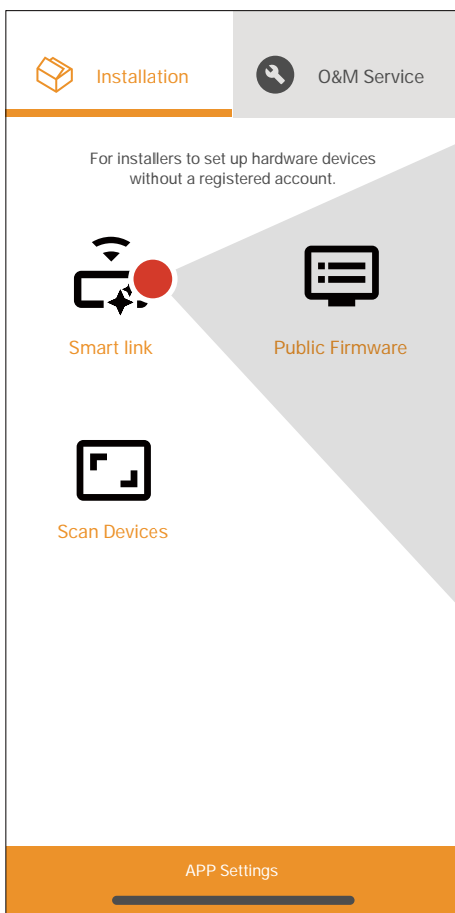

Make sure your phone can connect to the Internet when you run the app for the first time. The APP needs to sync some important data from the cloud.

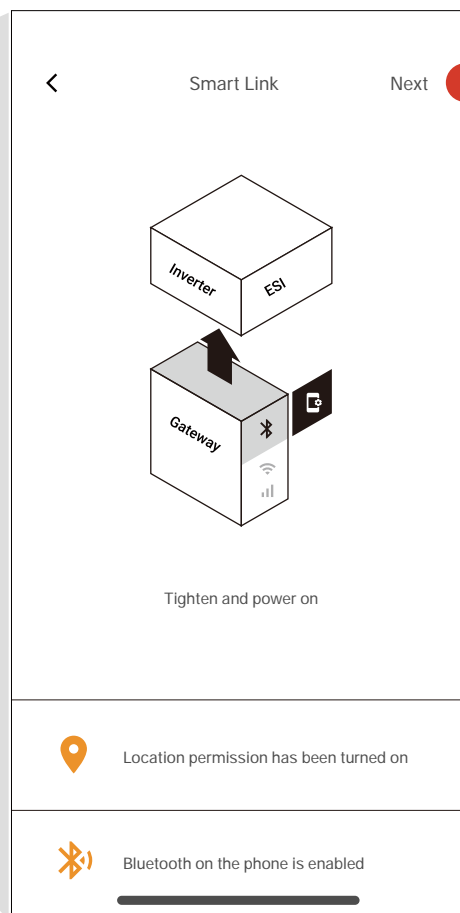



Click "smart link" and the app will prompt you to obtain some phone permissions. There is no abnormal prompt, click "next" to enter.

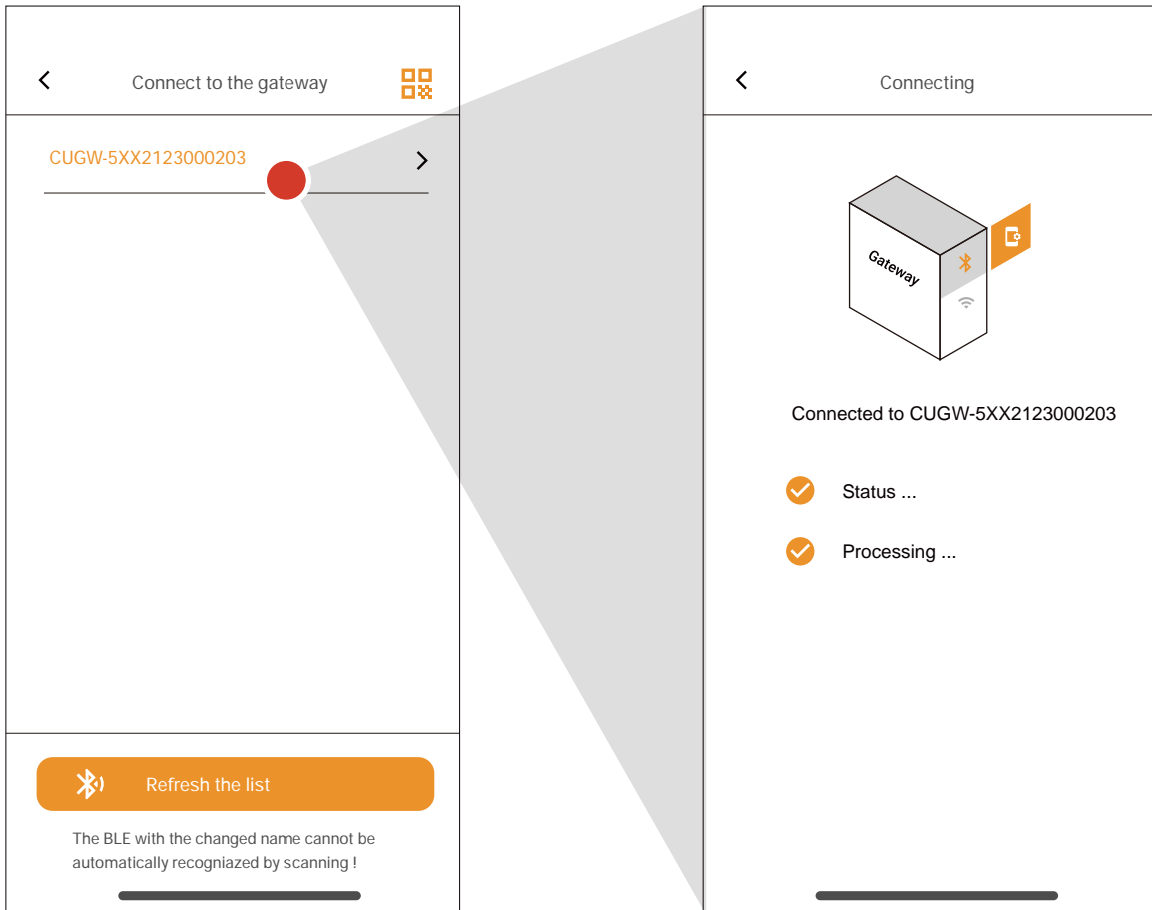


The gateway SN is included in the BLE signal name, and the app will list the scanned signals. Select the SN consistent with the target gateway label and click to enter.

During the process of connecting and entering the gateway configuration interface, the APP will prompt detailed information in case of any abnormality. Easy for users to diagnose problems.

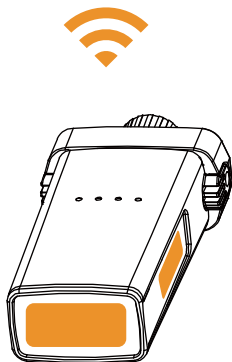

 SN barcode  
 Gateway SN The BLE name includes the SN

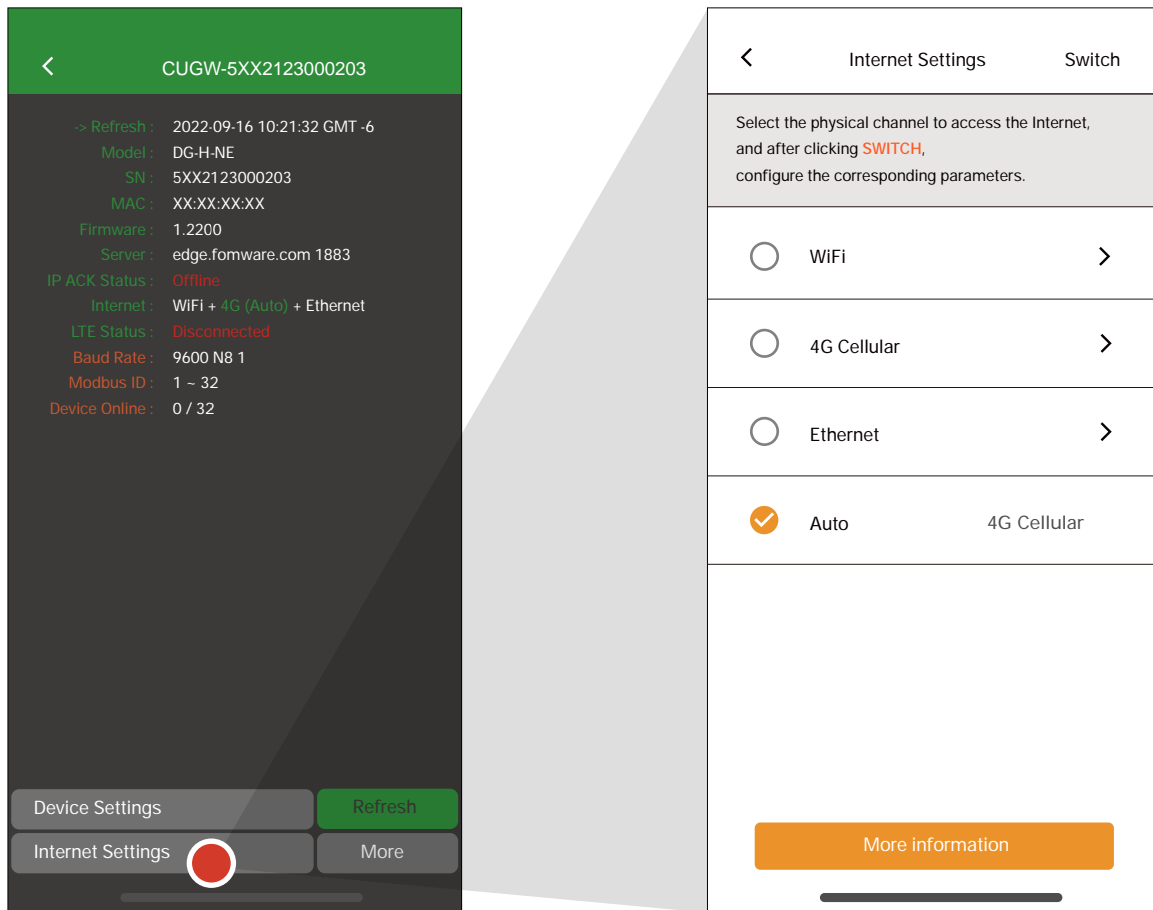

Ensuring that the gateway can connect to the Internet is the most important step.


Different gateway models have different optional networking channels

if the "Status" is "Online", the gateway is connected to the target server.

When the gateway status becomes "Online", the gateway will automatically create related objects on the portal, and the administrator can remotely set the required parameters.

Unless the factory default does not include 4G, the gateway connects to the Internet via 4G by default.

In this case, it is assumed that the SIM card is inserted into the gateway.

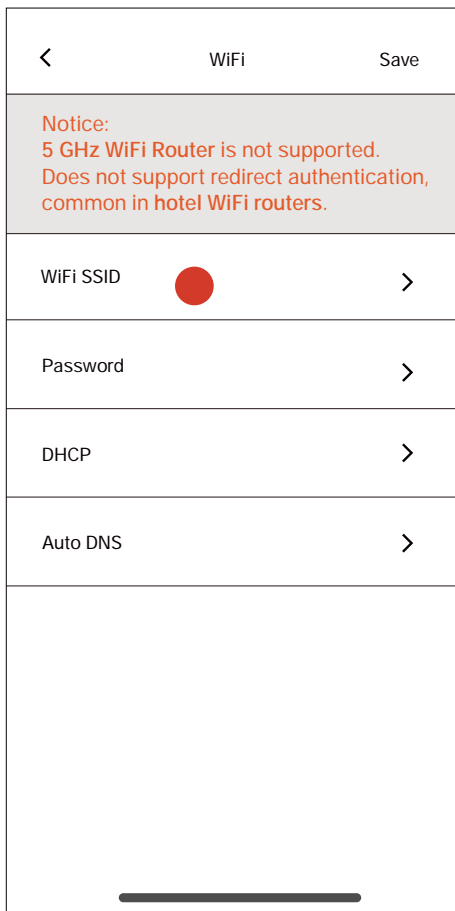

Click on "Internet Settings", select "WiFi" after "Switch".



Enter the correct WLAN information.




**Caution :**

After clicking "WiFi SSID" to configure, the APP will automatically fill in the WiFi SSID currently used by the phone.

If the user cannot judge the network status of the WLAN router, the user can configure the WiFi hotspot of the mobile phone to the gateway for reference.

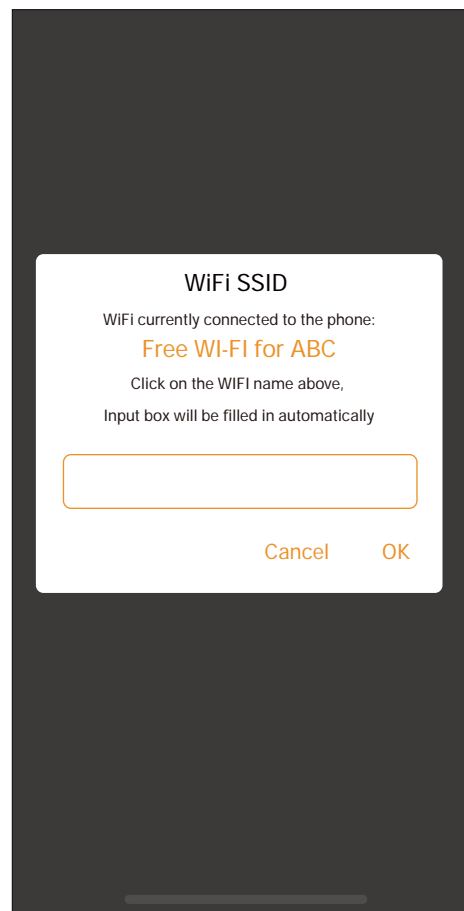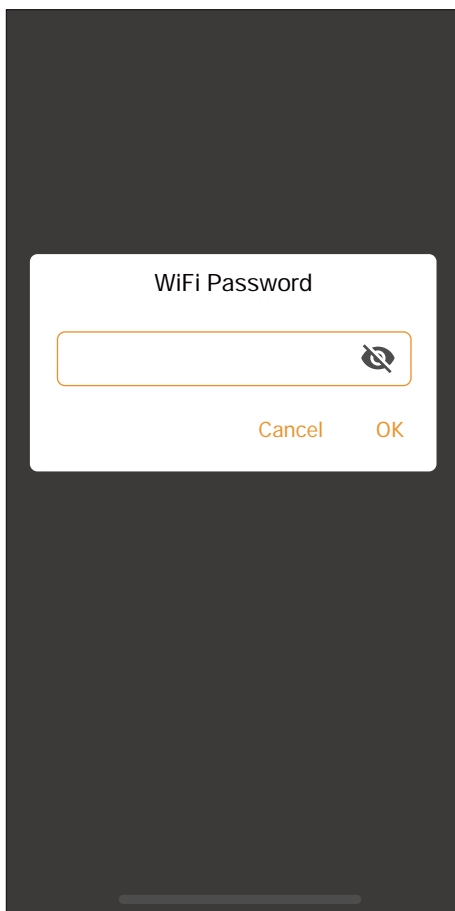

# Modbus Device Settings




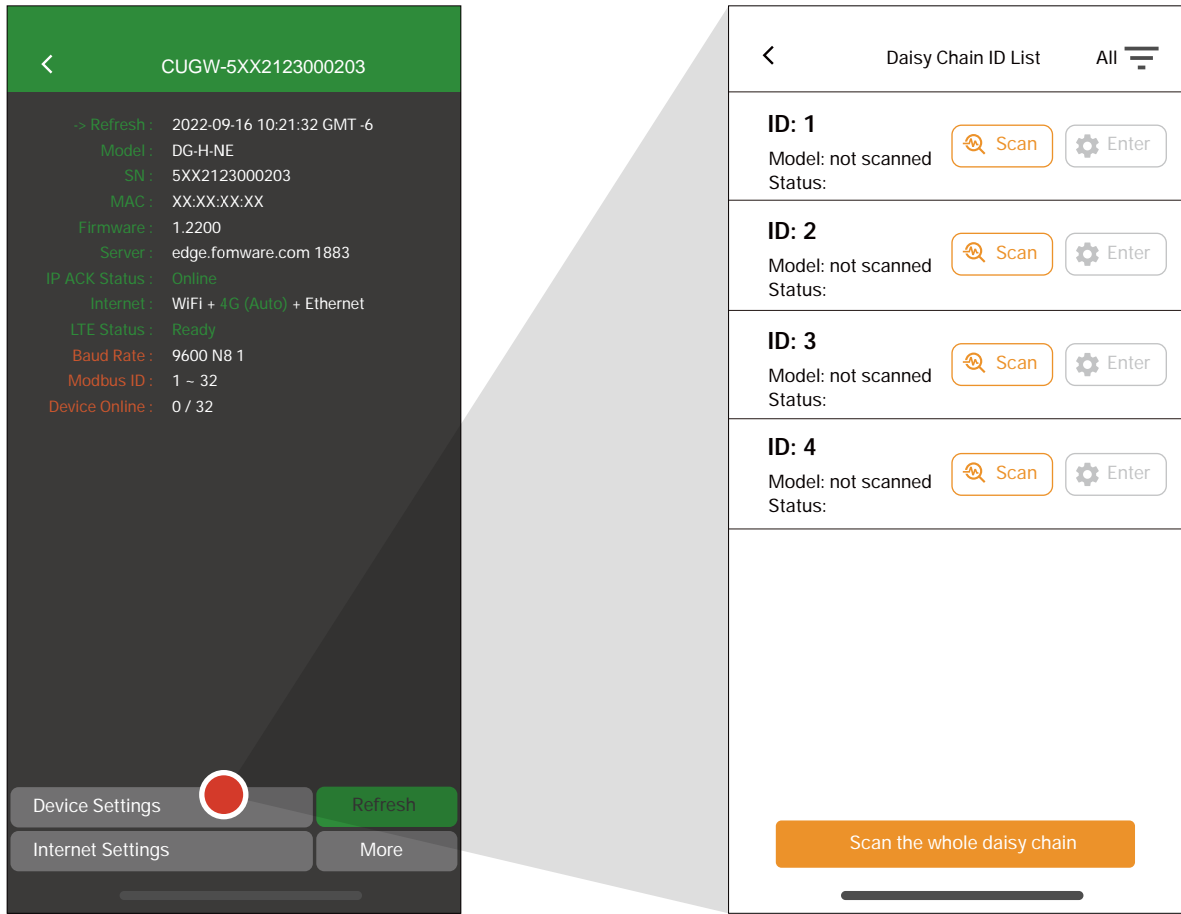


The gateway is configured with a default modbus ID range.



Click "Device Settings" and the gateway will scan the daisy chain. After scanning, a device list will appear with the default ID.

The user can either rescan the target IDs individually in the list, or scan the daisy chain in full.


Click "more" and then "Modbus ID Range" to set different Modbus ID address segments on a RS485 daisy chain for discovering various hardware devices

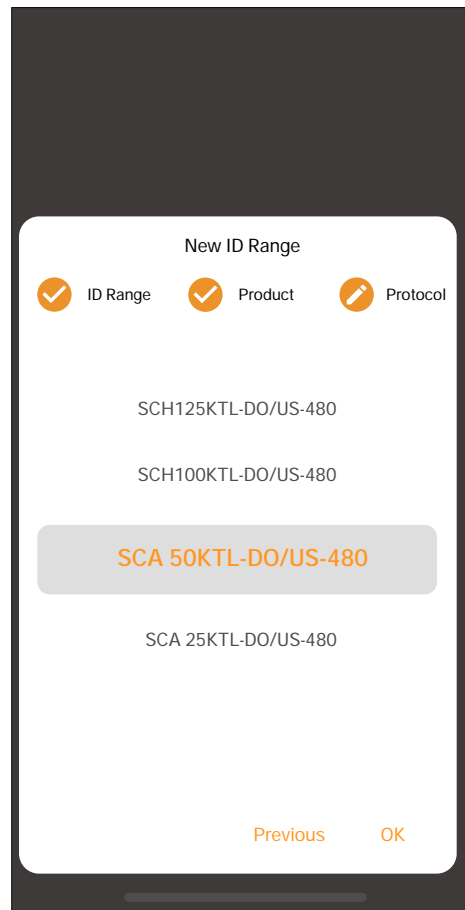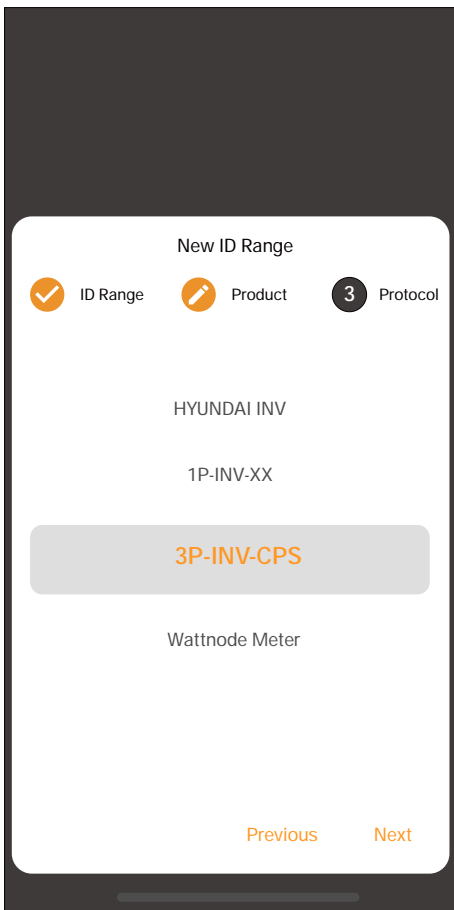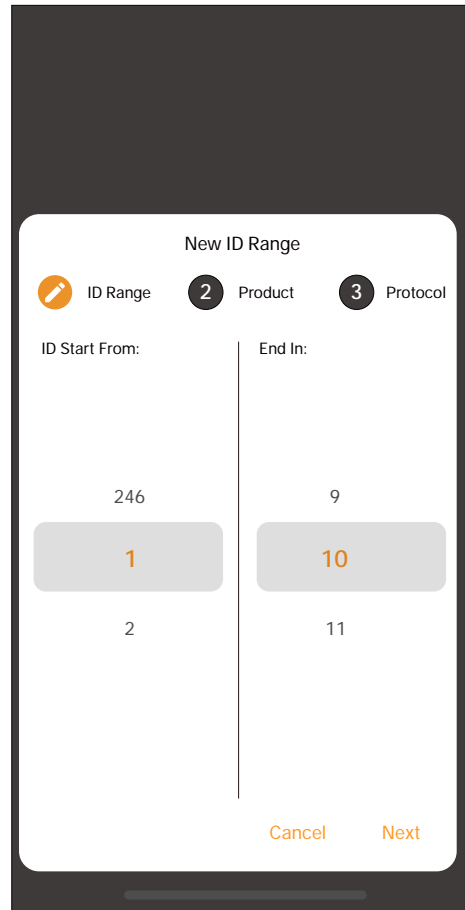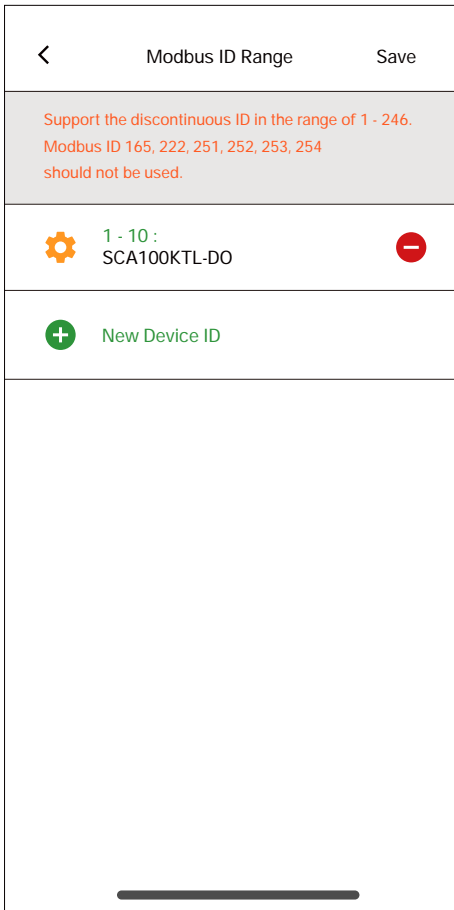




# Changing the Inverter Settings

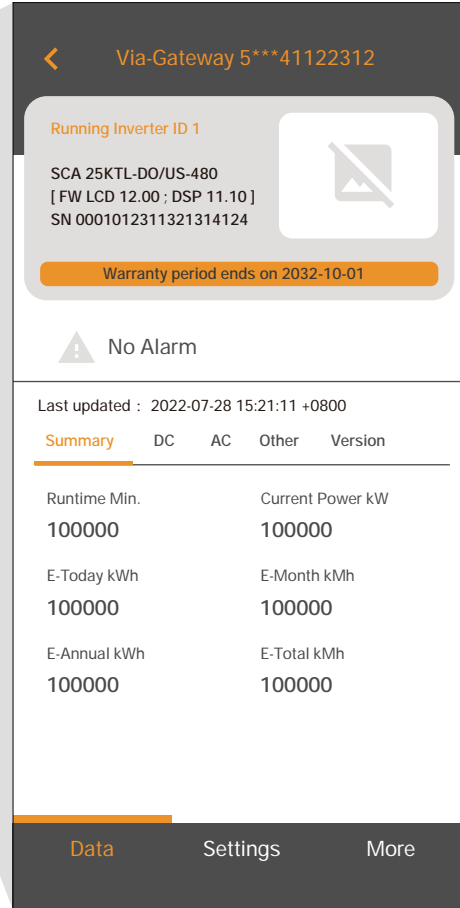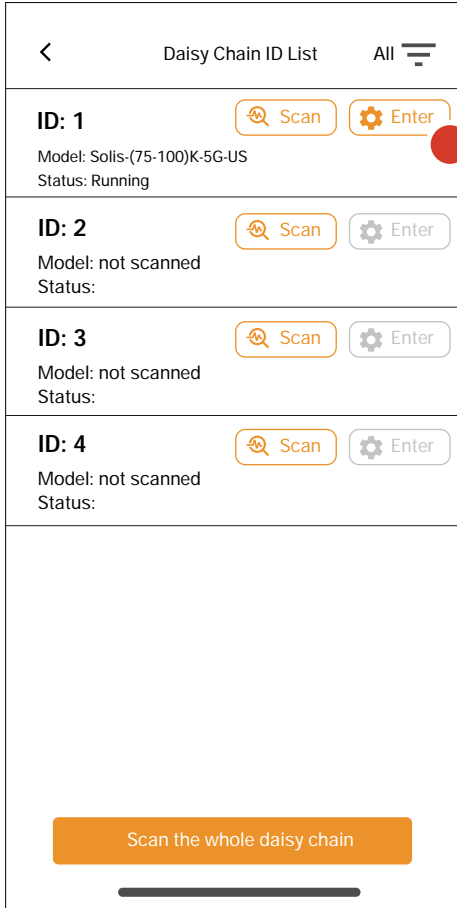

Click "Device Settings" to view the inverter data. If the inverter needs to be initialized, the APP will prompt to set parameters such as grid code or clock.



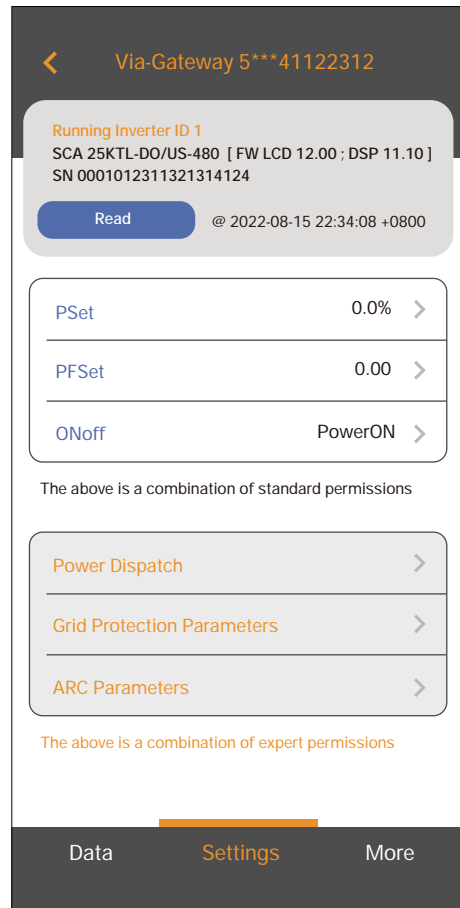




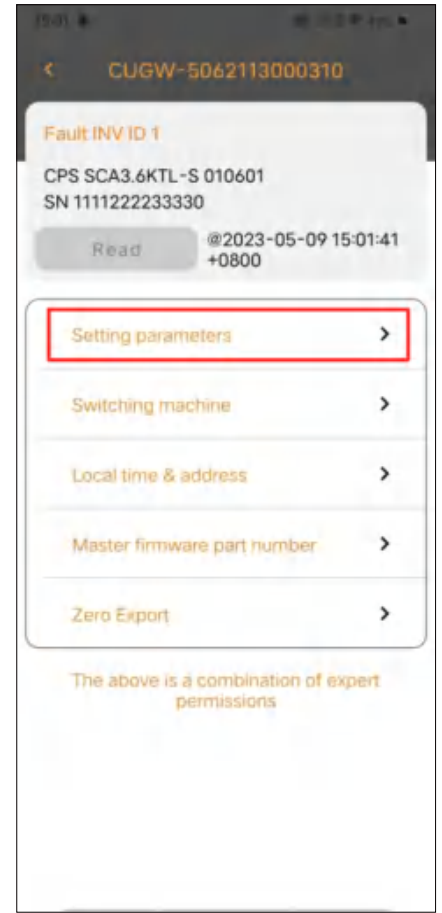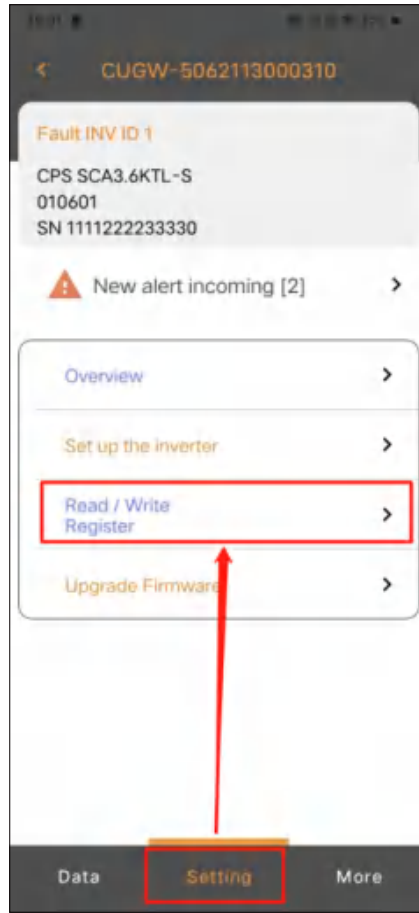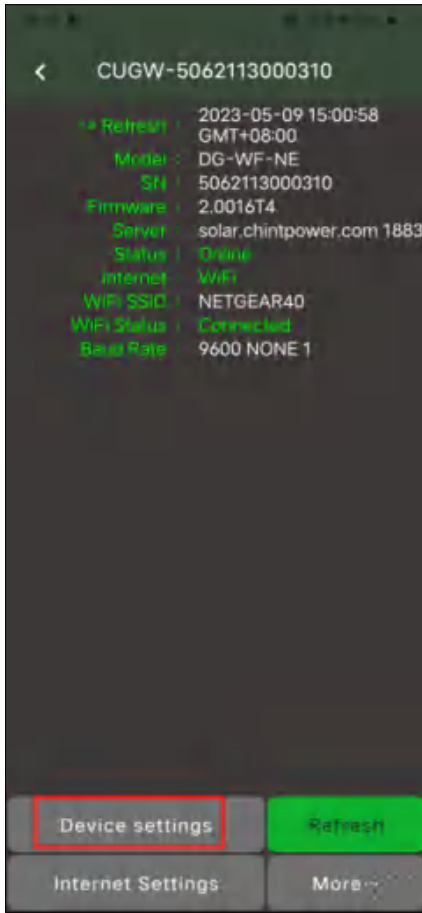

If the gateway and inverter are connected one-to-one, click "Device Settings" to enter the inverter parameter setting interface.


Click "Read/Write Register" and select the register group you want to modify.

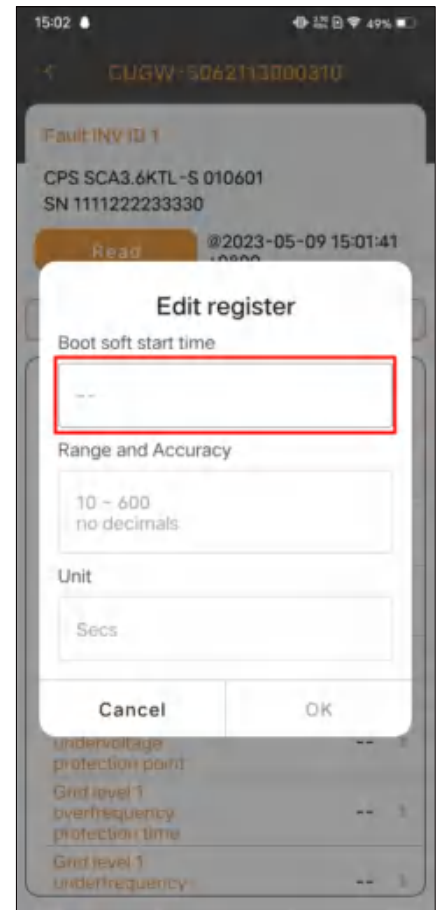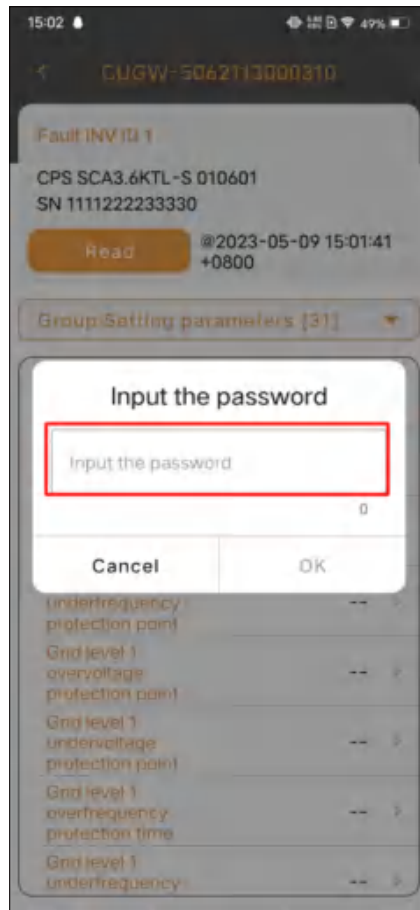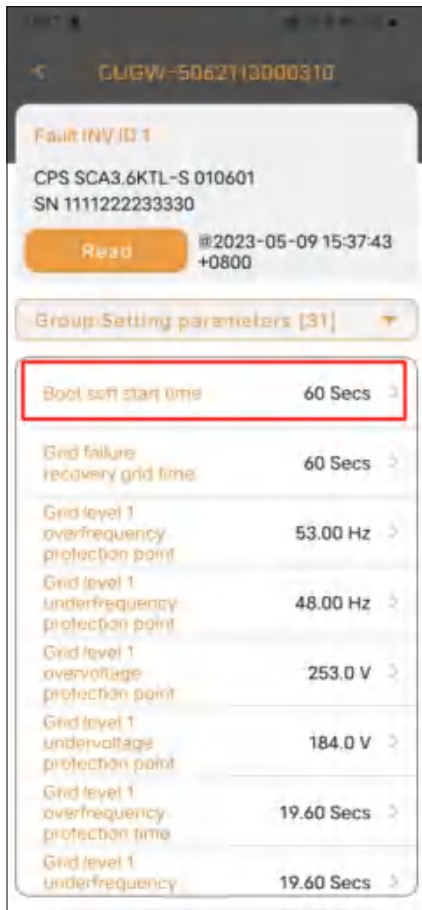

If you need to modify the register, you need to enter the administrator password "admin" before clicking Modify.

(The password may be different for different models of inverters in different regions. Refer to the inverter manual for details)



## Australian specification related


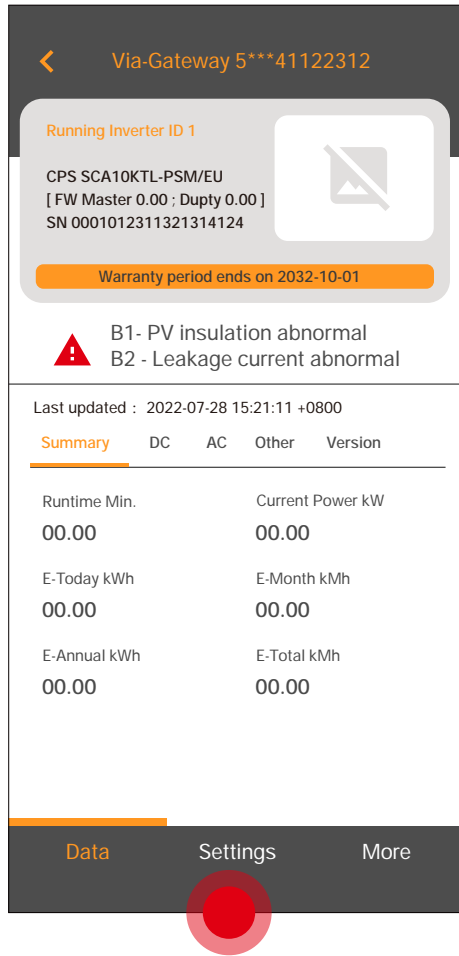


The APP logs in to the inverter setting interface through BLE.

The inverter will show specific B1/B2 alarms to follow the Australian protocol.


Click "Settings" to change the grid code of the inverter. The user can directly read the current grid code setting.

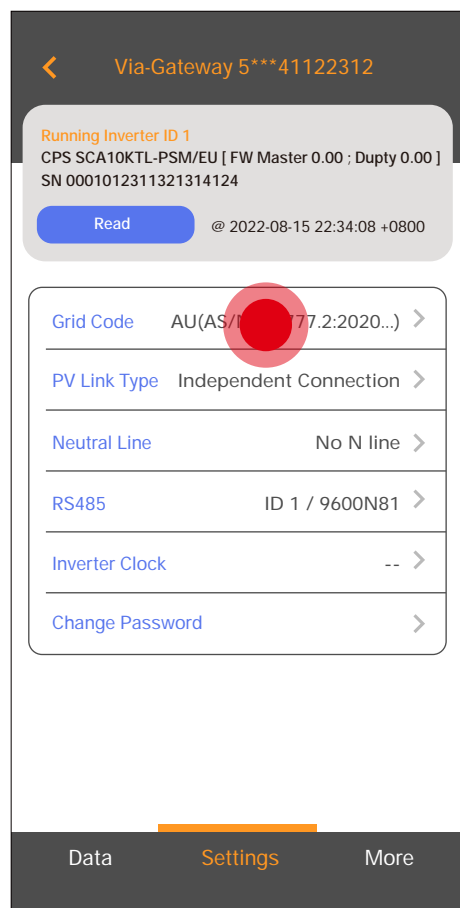
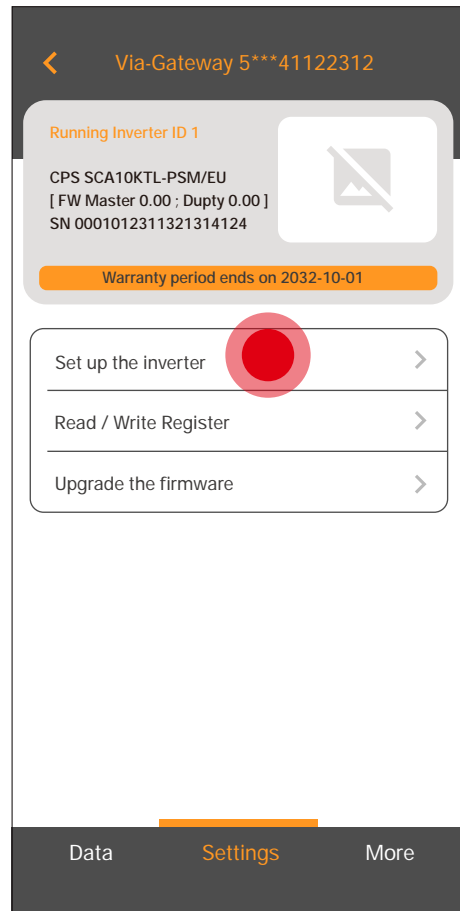


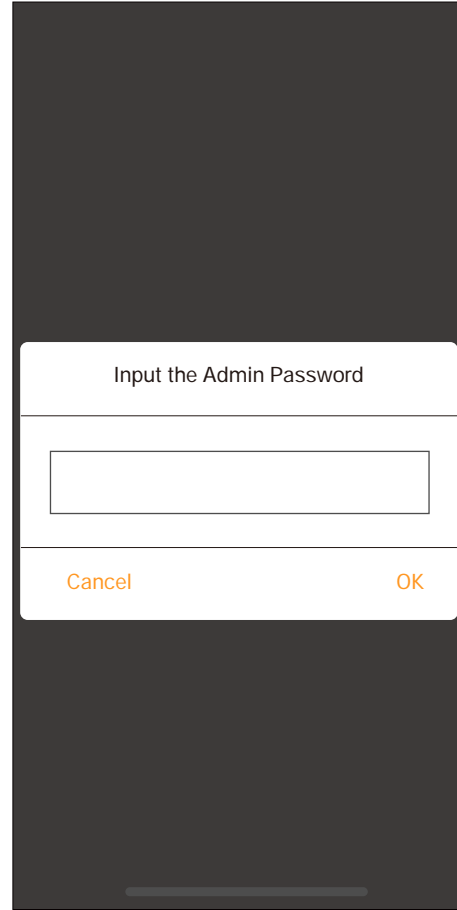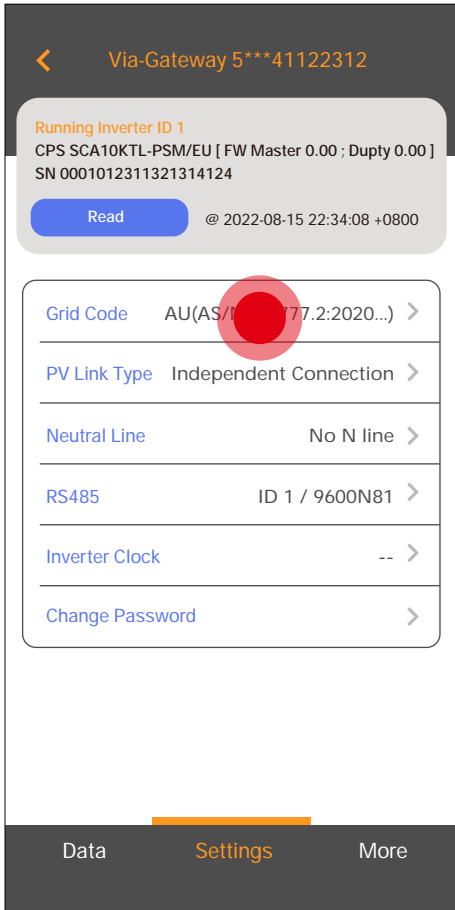

Input the password before change the grid code "register value".


Select the "grid code" and save the configuration.

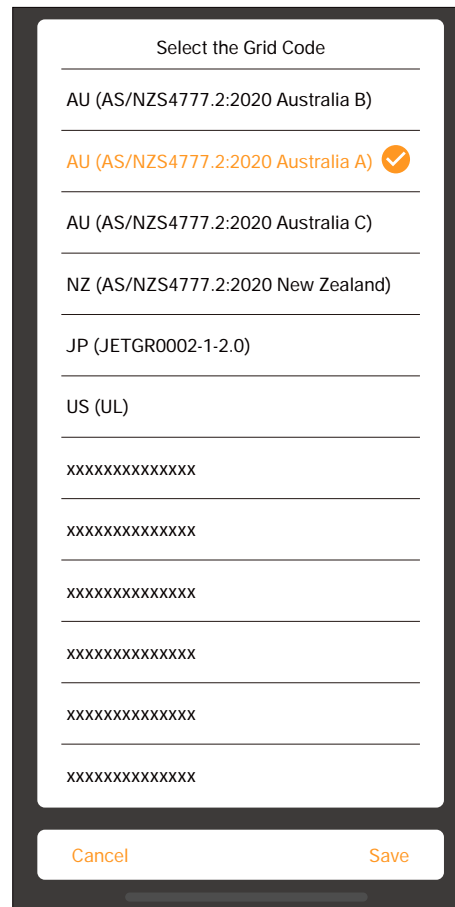

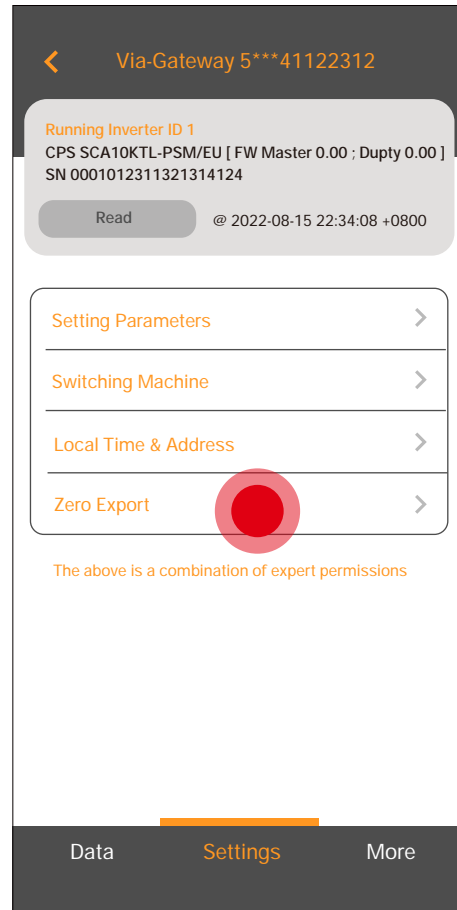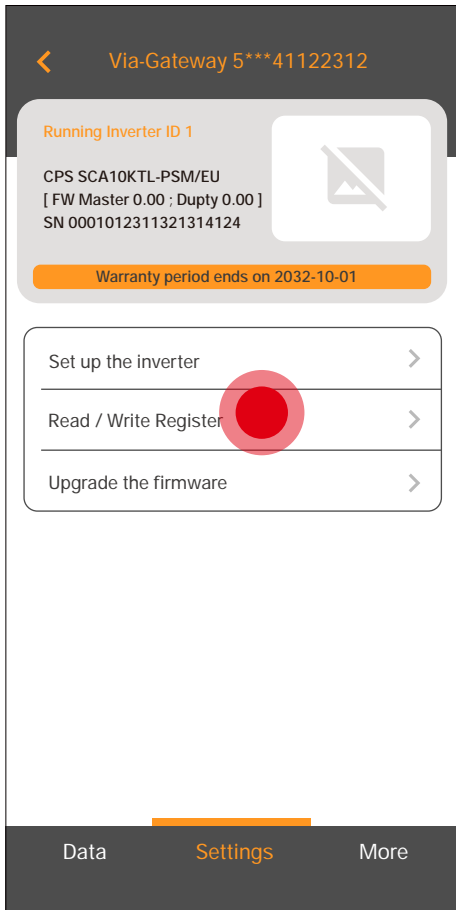

The user needs to set "Zero Export" for this inverter in the "Zero Export" scenario for a single inverter.

For "Zero Export" for Daisy chain scenario, please refer to SE Box related product introduction.

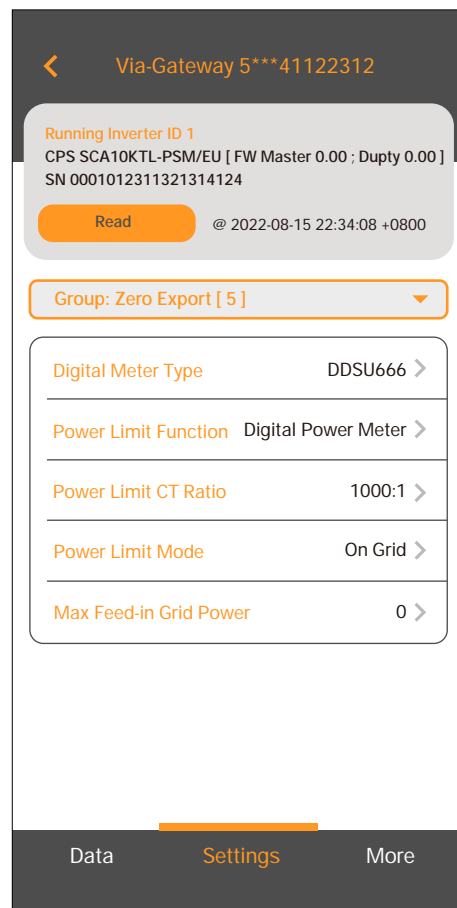

## Go Page 9

No account registration required, connect hardware immediately.



Standing in front of the gateway and inverter etc, ready to start setting up?



Is this your first attempt to register an account with this app?

No, my account was created by CPS or CPS customers.



Yes



### Portfolio Owner / Customer



- Manually created "Customer/Entity" in the "Account Tree".






### Let's start with "End User"

- Self-registered "Customer/Entity"

Click to the next step

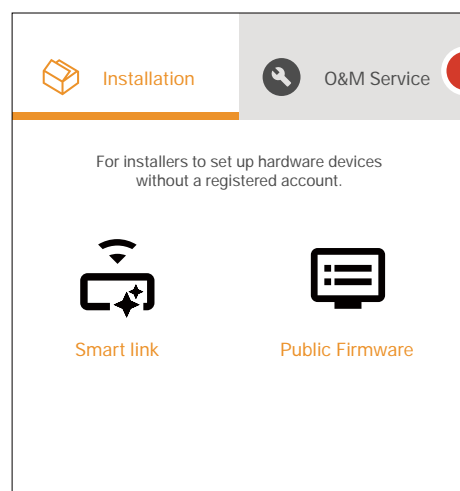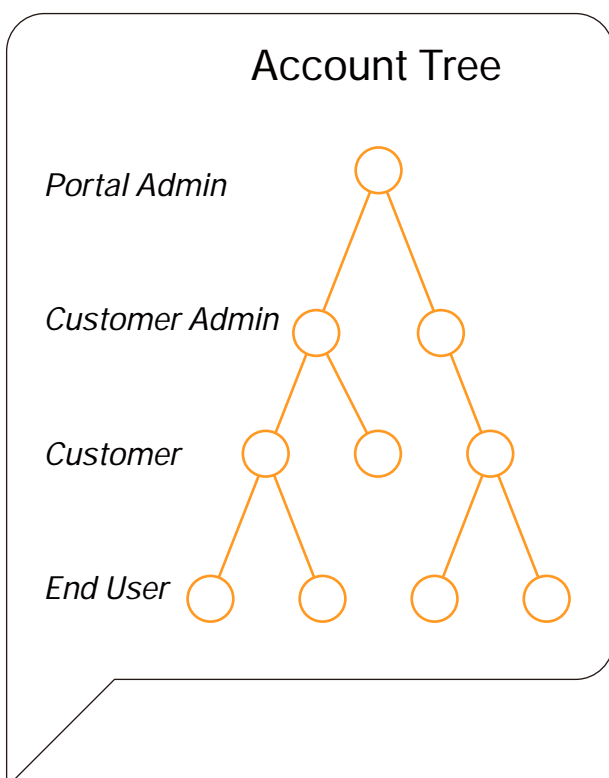

## Create a "Master Account" for "My Portfolio" (End User)

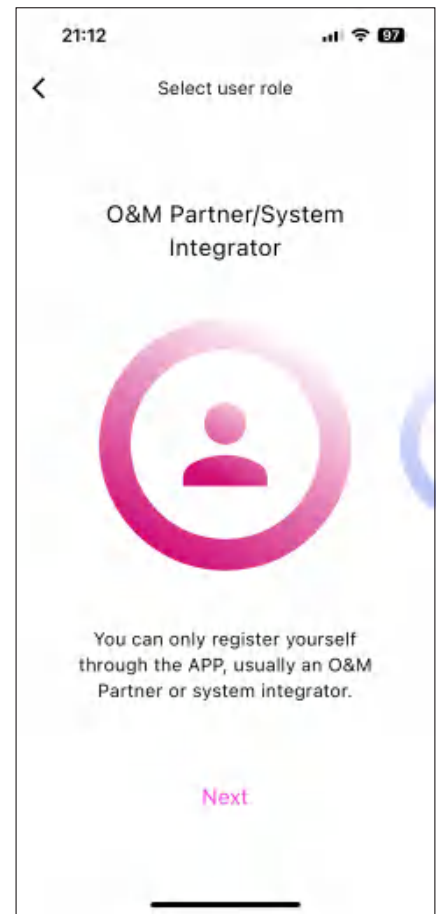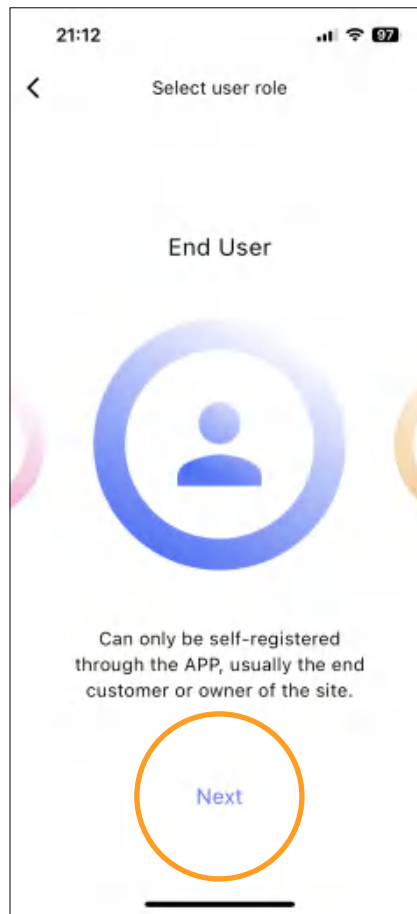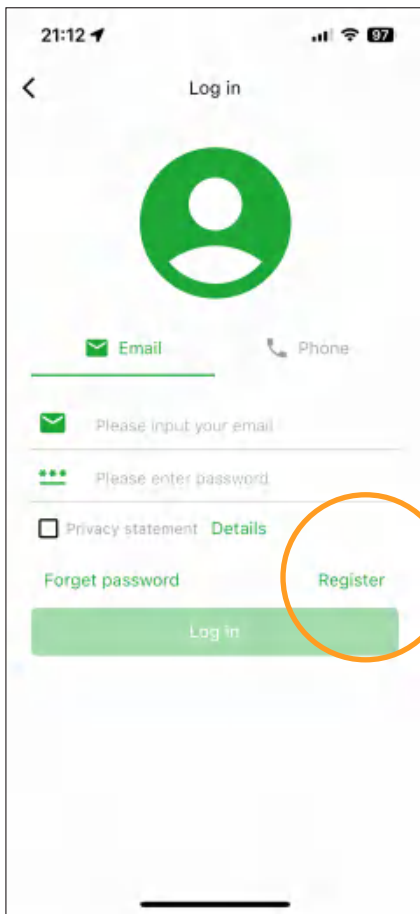

The real, non-duplicate email or cell phone number used for registration will receive a verification code from the platform.


Once entered correctly, the account will be registered successfully.


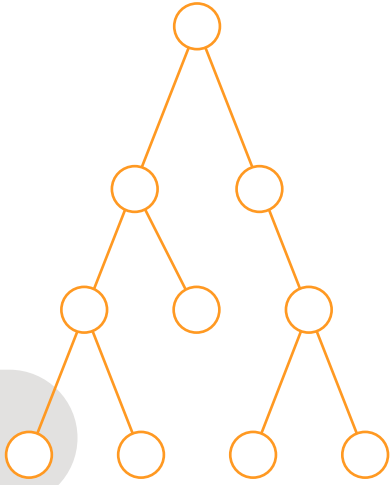

In this section, you will register a new account as "End User".

When the user slides the registration screen, the "OM Partnet" user role is another account type that allows the user to register themselves through the APP.


OM Partner is a service or integrator account role with a cross-organizational perspective.

# The Concept of "Portfolio Owner" / "O&M Partner"



| Portfolio Types  | User Roles  | Account Tree  |
|--|---|---|
|  Customer   | <i>Portal Admin</i><br><br><i>Customer Admin</i><br><br><i>Customer</i> |  |
|  End User | <i>End User</i>   |   |


## My Portfolio

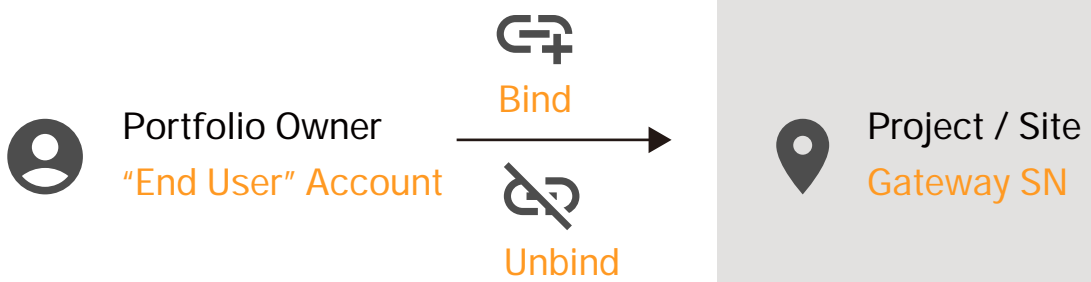

"End User" or other user role to associate a "Project/Site" with "My Portfolio" by binding the gateway SN.

Detach a "Project/Site" from "My Portfolio" by unbinding the gateway.




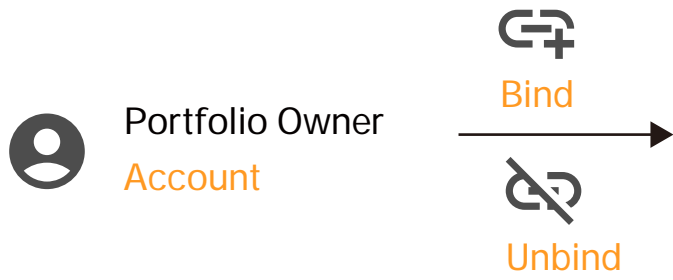

Project / Site  
Gateway SN

OM Partner is a service or integrator account role with a cross-organizational perspective.

Any "Portfolio Owner" can select the target "Project/Site" and authorize/disauthorize "OM Partner" to access the target "Project/Site" by binding/unbinding the "O&M Partner" service code.




O&M Partner  
Account



O&M Partner /  
System Integrator

| User Roles            | Account Tree |
|-----------------------|--------------|
| <i>Portal Admin</i>   |              |
| <i>Customer Admin</i> |              |
| <i>Customer</i>       |              |
| <i>End User</i>       |              |

# Create "Sub-Portfolio" ( Why Can't I Create Them)

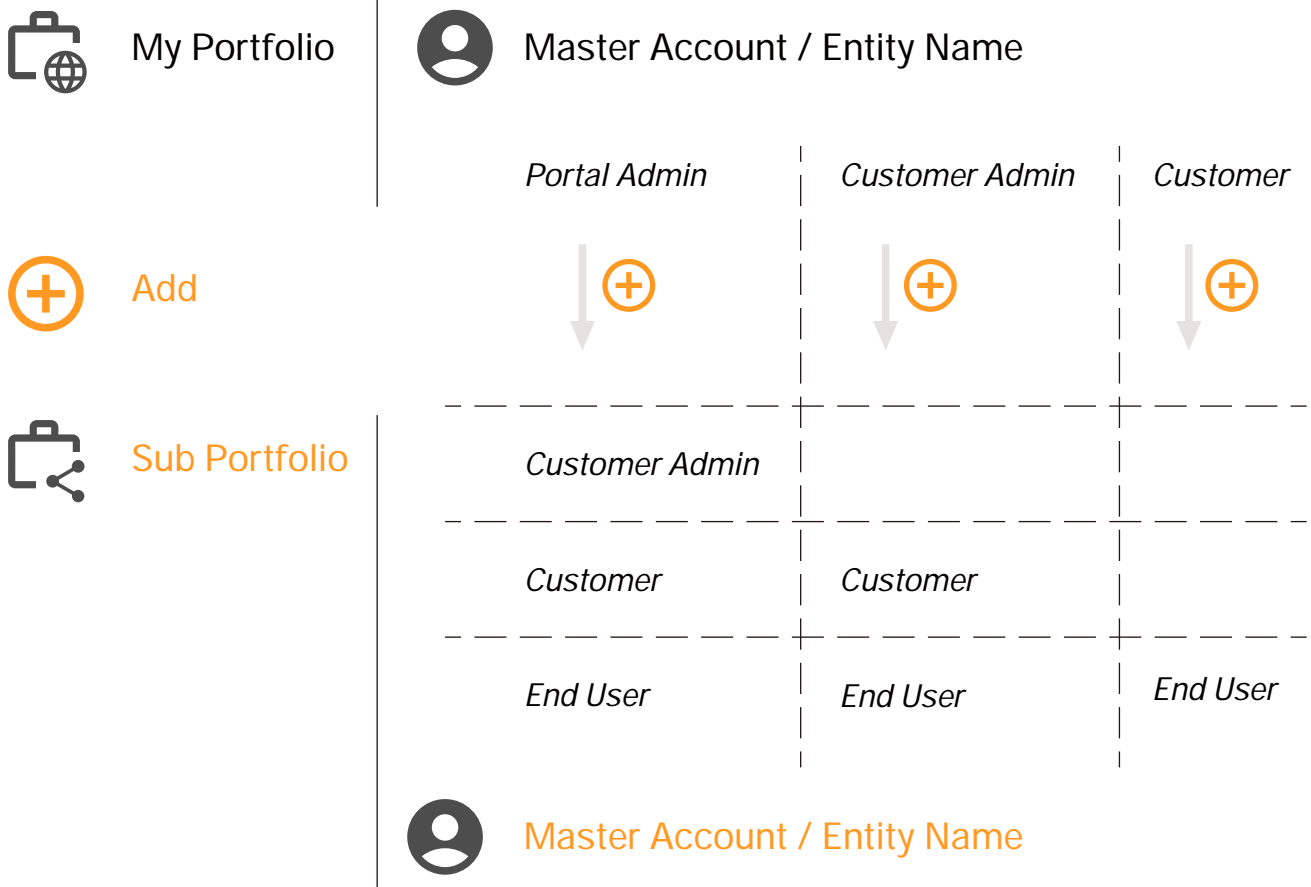



When the "Portfolio Owner" is a Portal Admin role, you can create a "Sub Portfolio" for the Customer Admin/Customer/end user role.

When the user is a "Portfolio Owner" in the End User role, no other role or "Sub Portfolio" can be created.

Any "Master Account" can create a series of "Associate Account", solving the problem of setting different permissions or boundaries for different employees managing a large number of assets within an entity.

# End User

## How To Create "Project/Site"

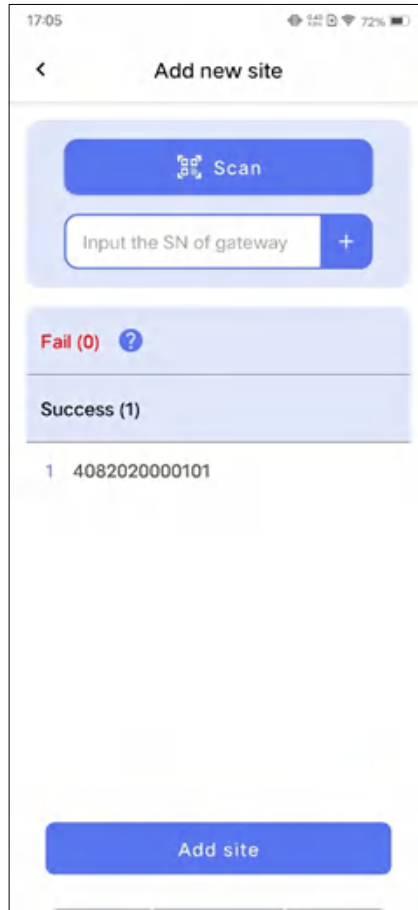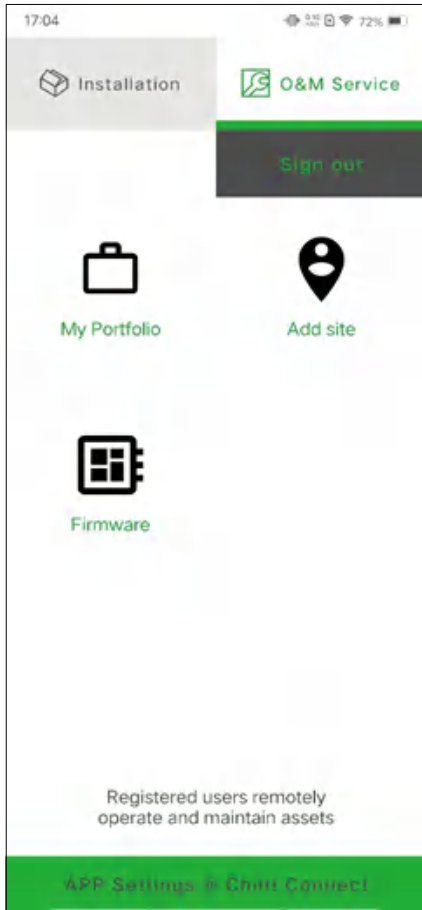

After logging in to your "End User" account, click the "Add Site" button on the app screen.




Users can scan the SN barcode on the gateway or manually enter the relevant SN number.

If the SN is correct, the "Project/Site" associated with the gateway SN is associated with the target "Portfolio Owner" account.

Users can enter the name/sn of the site or device in the site list to quickly find the target.

# End User

## How To Bind/Unbind "O&M Partner" To "Project/Site"

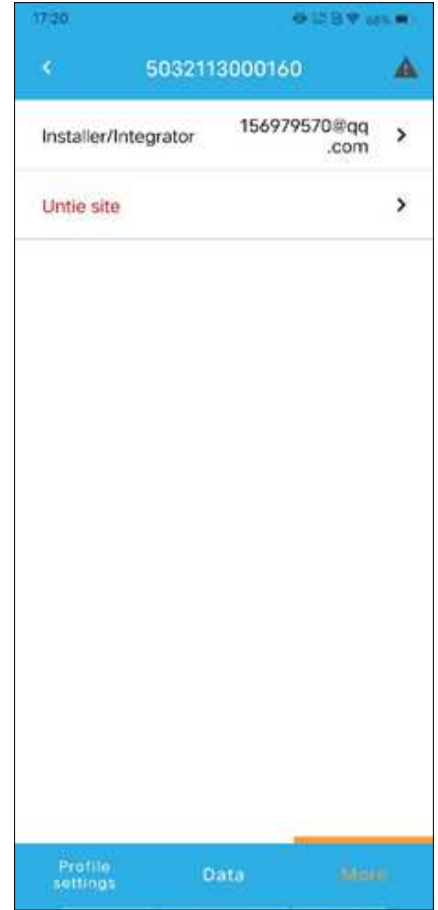
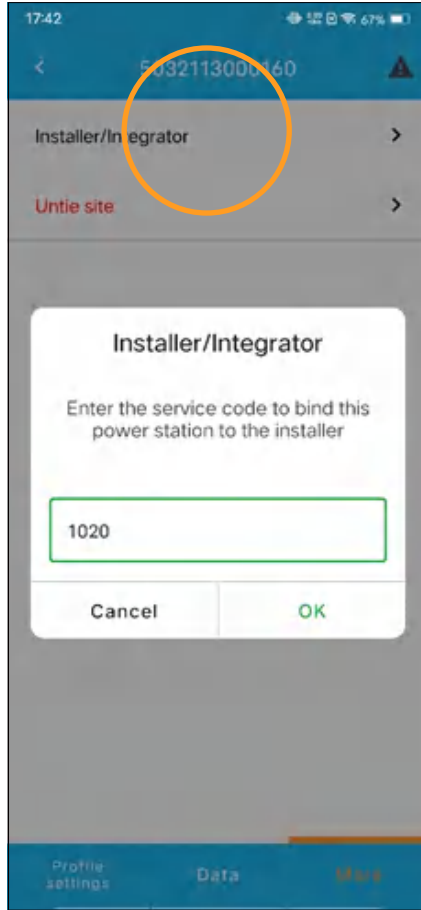
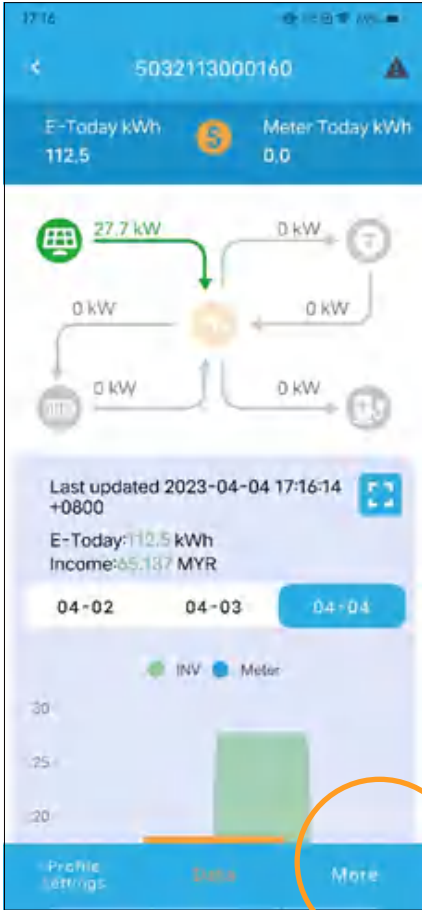


"End User" Enter the service code of "O&M Partner" on the target site, then the site can be viewed by "O&M Partner" for data and O&M correlation.

In the target site, click on "O&M Partner" again to unbind the existing authorization relationship.

# End User

## How To Unbind "Project/Site" From "My Portfolio"

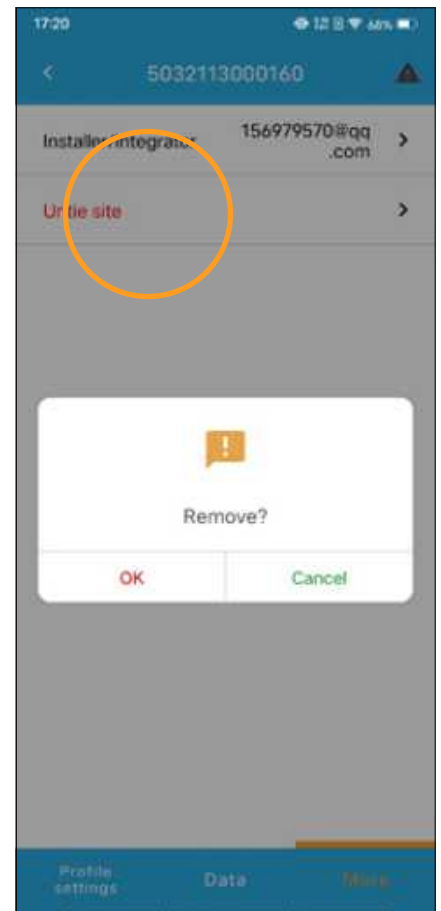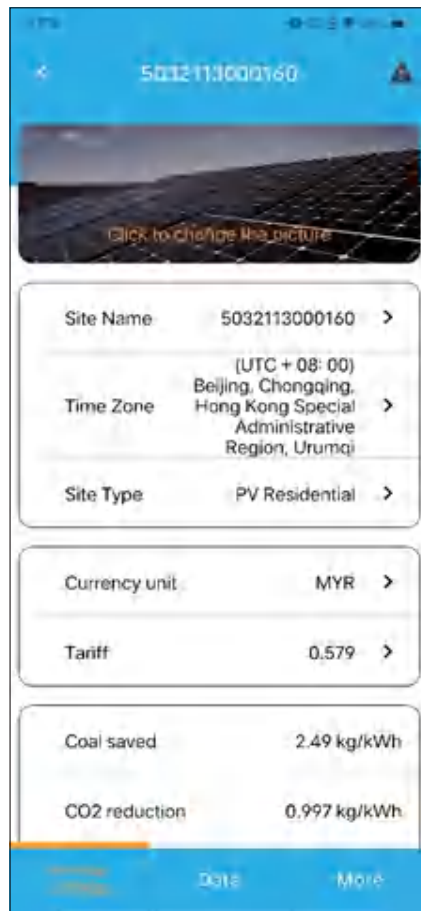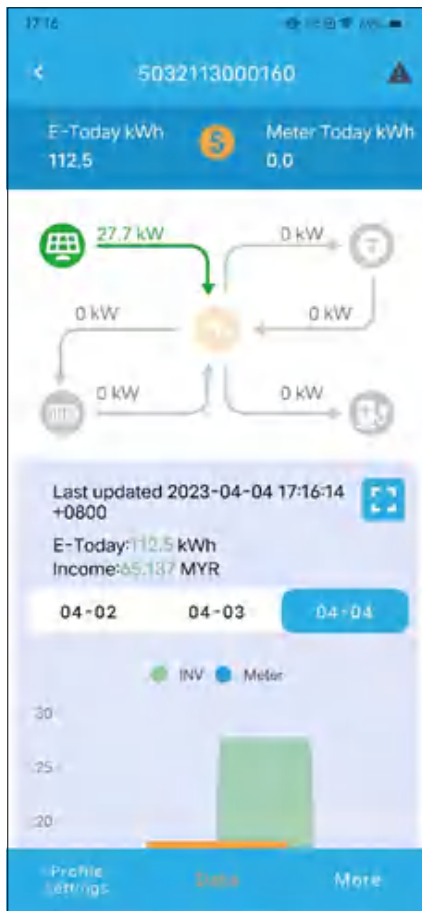


"End User" Enter the service code of "O&M Partner" on the target site, then the site can be viewed by "O&M Partner" for data and O&M correlation.

In the target site, click on "O&M Partner" again to unbind the existing authorization relationship.



# End User

## Edit the Profile of "Project/Site"

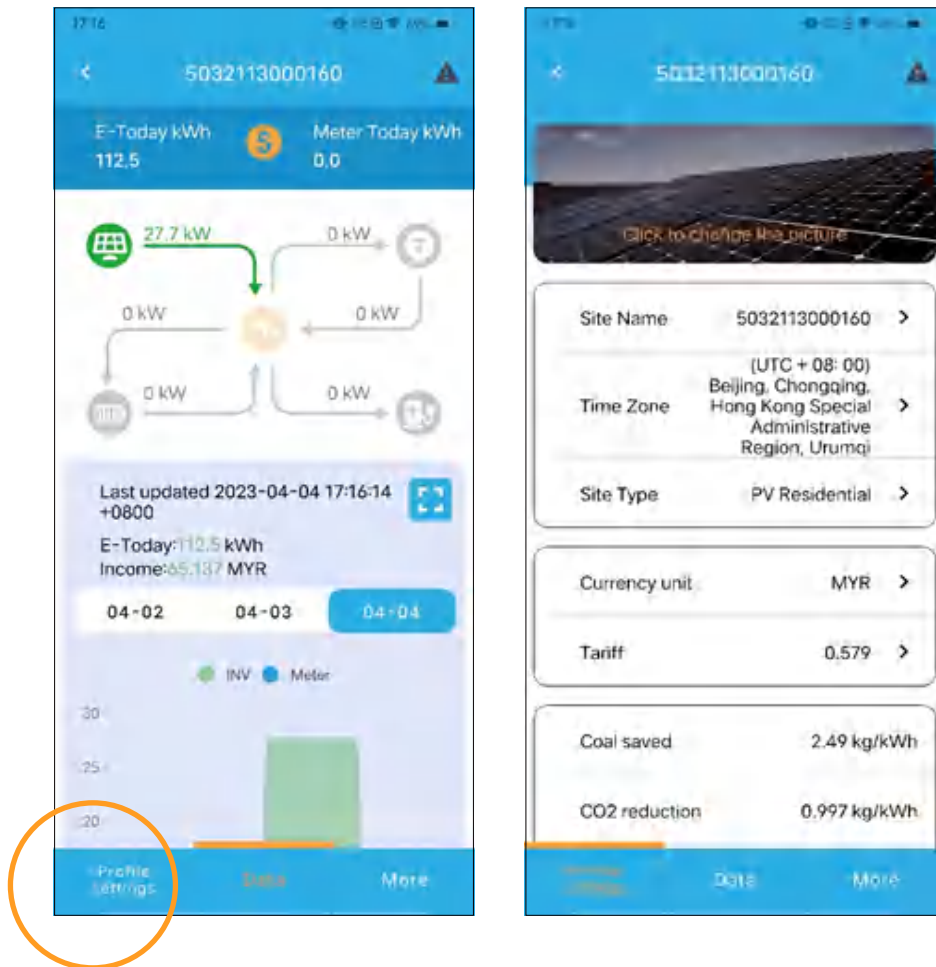


Newly created sites have some important basic information that needs to be set up correctly, such as time zone, site type, revenue units, etc.

# End User Check Basic Site Data

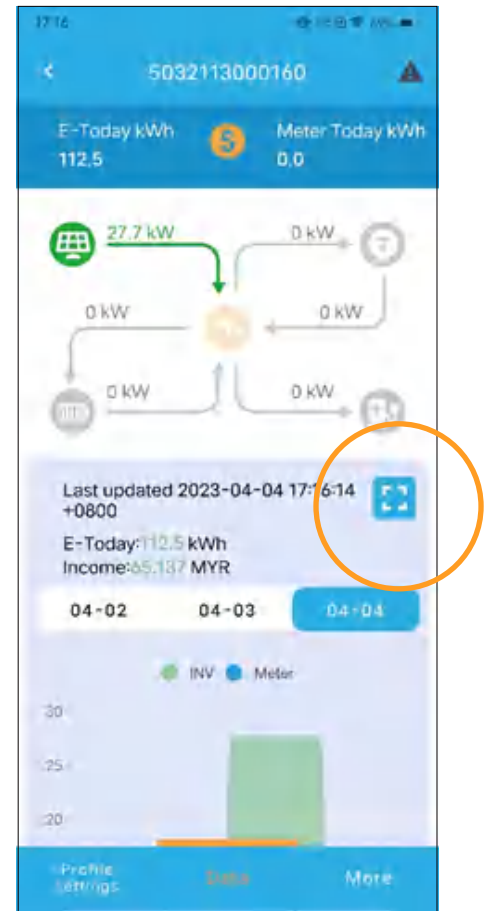
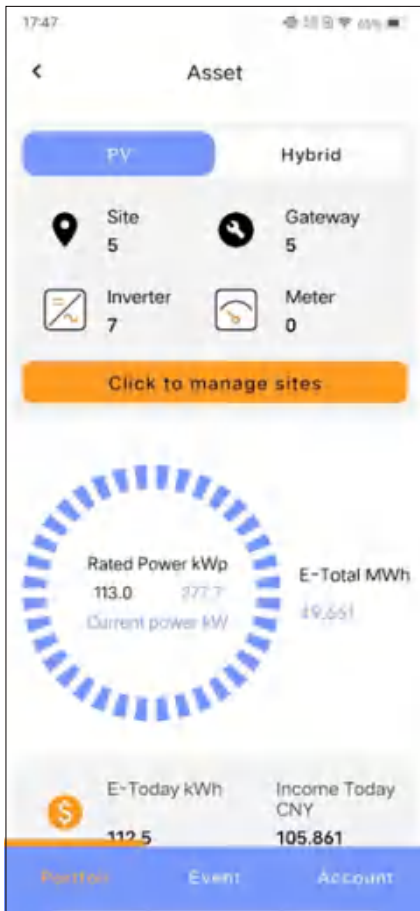


To see more specific data details, you can go to full screen from the thumbnails and then you can view different parameters for different devices.

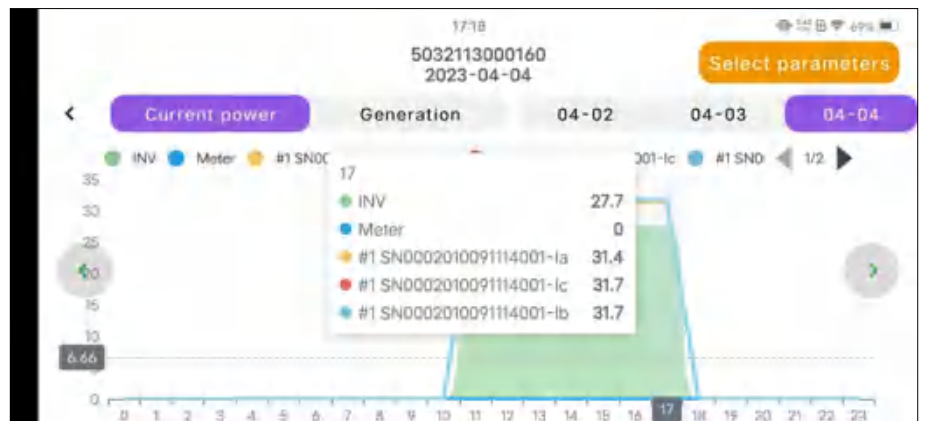

# End User

## Check Basic Device Event

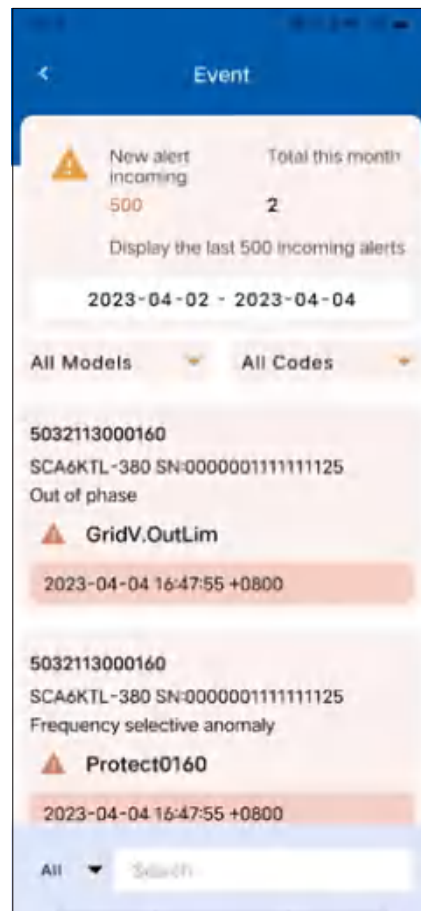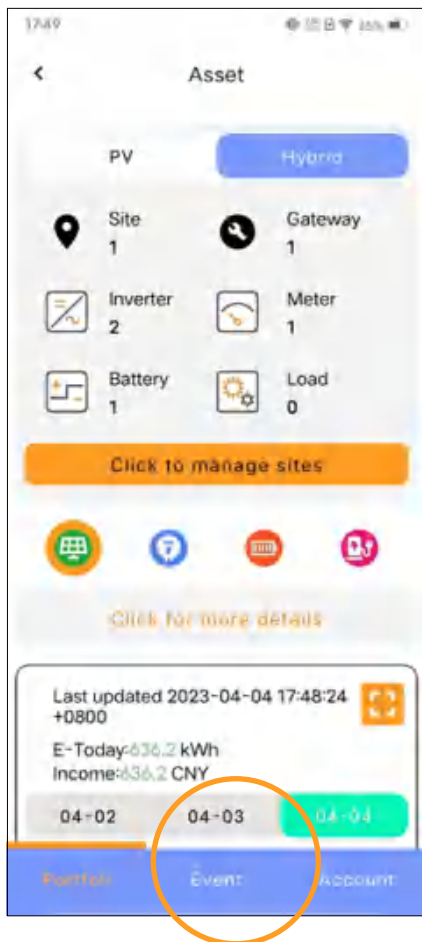


Ability to view event alerts in multiple dimensions, including global or specific sites, different event categories, and time intervals.



# End User

## Remotely Change the Device's Registers


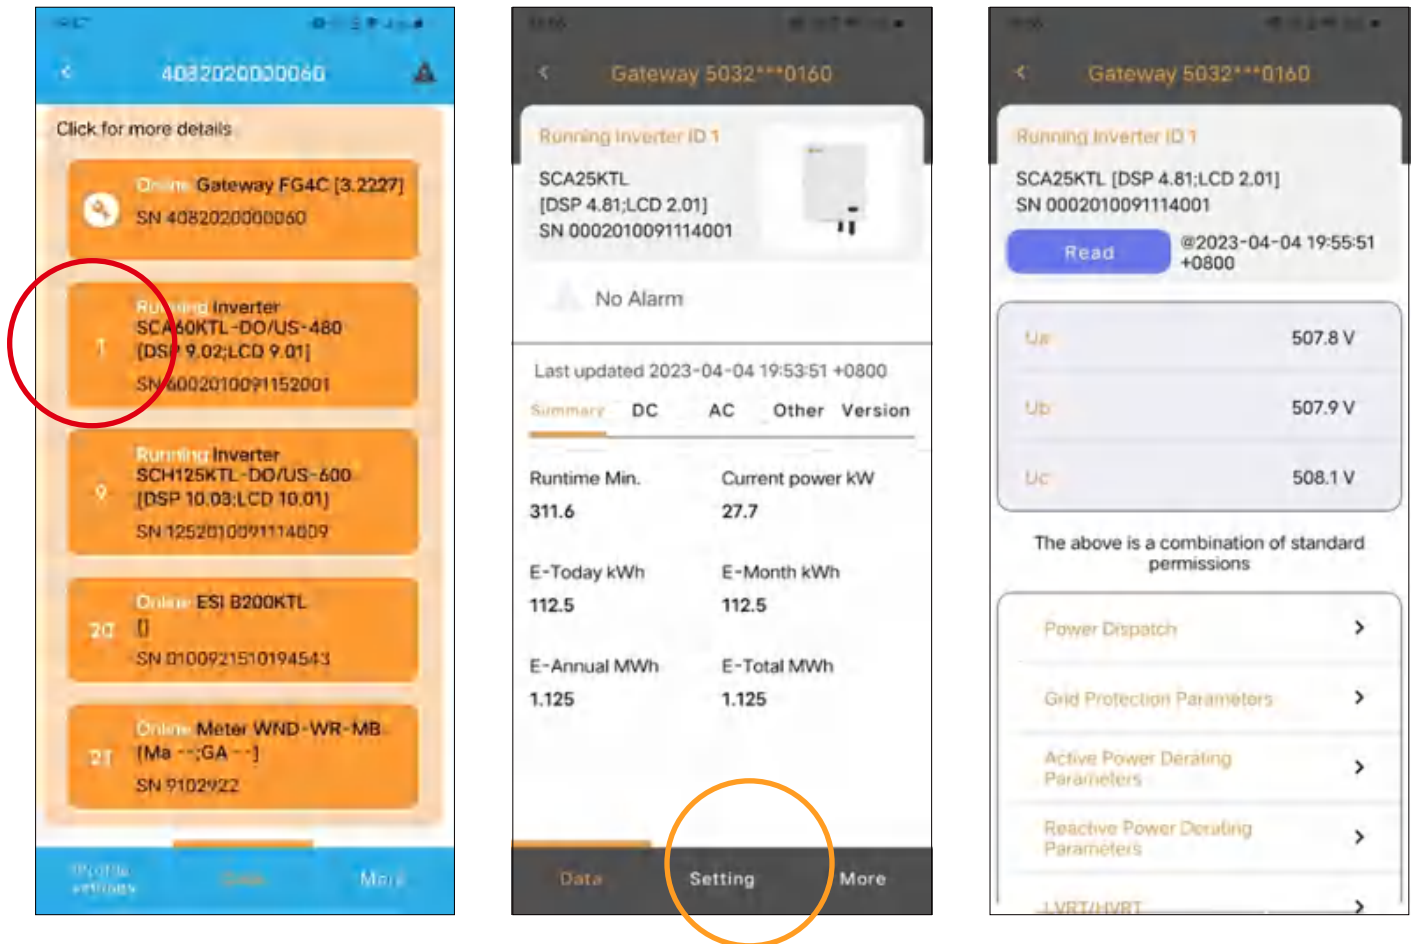


On the site details page, click on the target device in the device list to enter the detailed data and settings page for the specific device.

The user is able to read and write to the registers of the device if he has the relevant privileges.

# End User


## Remotely Change the Gateway's Parameters

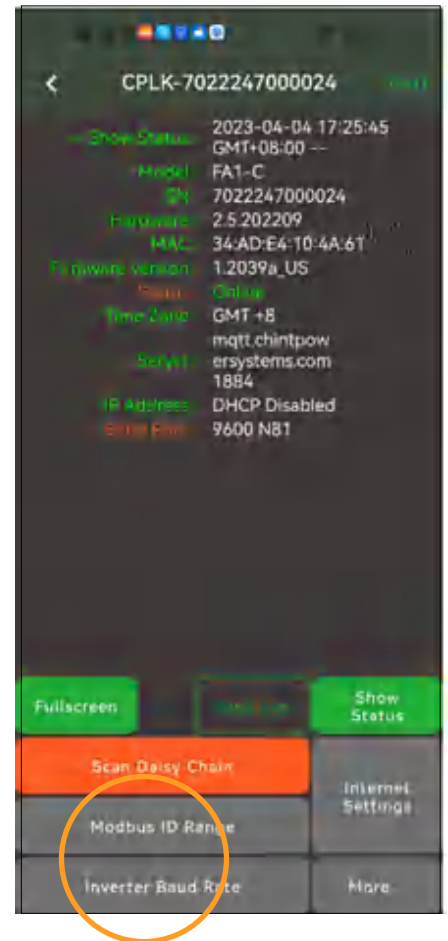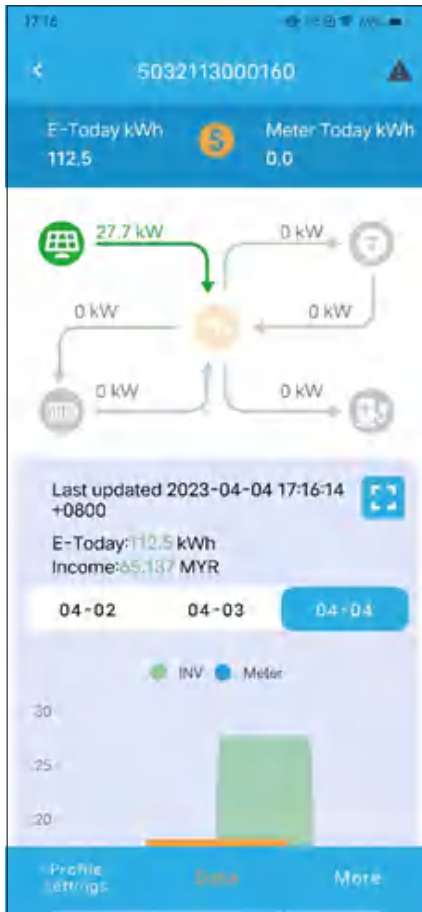

On the site details page, click on the target device in the device list to enter the detailed data and settings page for the specific device.

The user is able to change the settings of the gateway if he has the relevant privileges.

# Customer Assign the Site To An Account


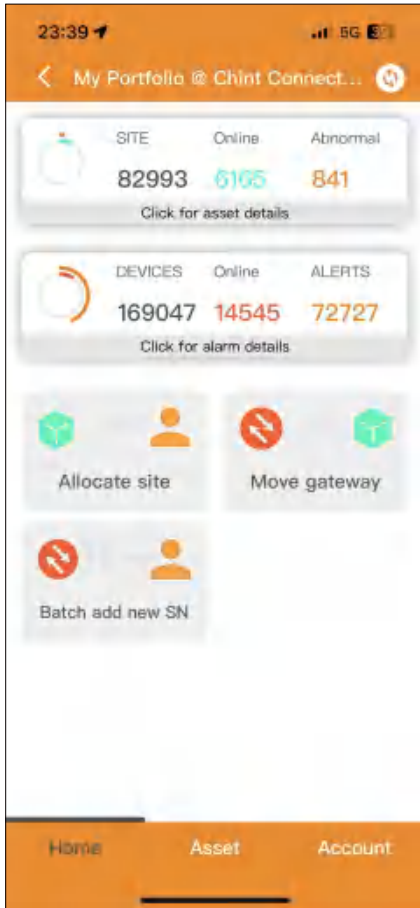


After logging in, click "Allocate Site", the app will list all sites under the account, and users can fuzzy search the target site.

When the target site is selected, swipe left to display "Delete" and "Allocate site".

Must be clearly assigned to target accounts on a hierarchical basis according to the "Account Tree" relationship.

# Customer Move the Gateway To A Site

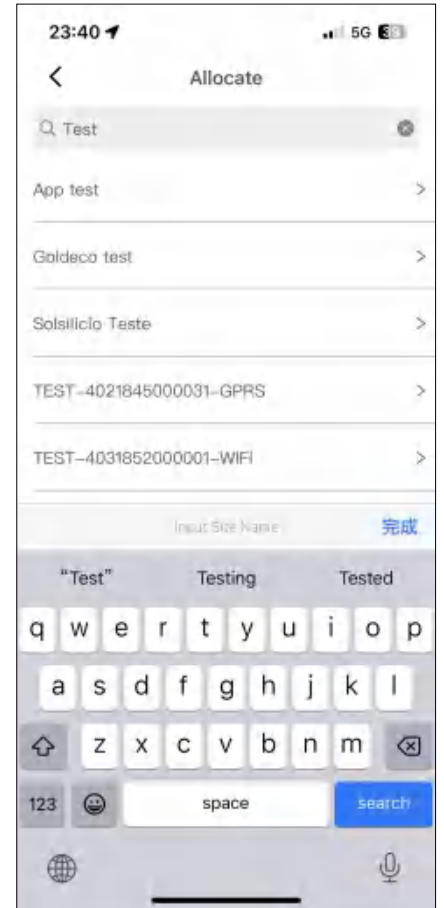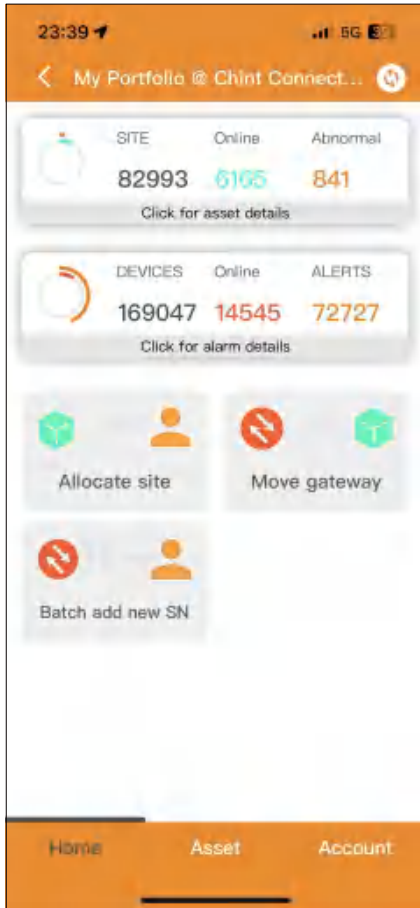




After logging in, click "Move Gateway", the app will list all gateways under the account, and users can fuzzy search the target gateway.

When the target gateway is selected, swipe left to display "Delete", "Rename" and "Move gateway".

Check the target site, or fuzzy search and find the site.

When the gateway is moved to the target site, relevant statistics will be automatically merged.

# Customer Batch Add New Gateway SN

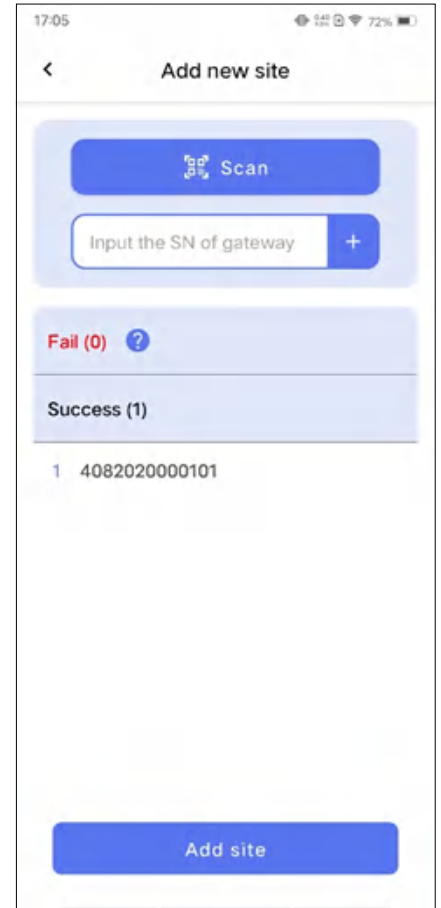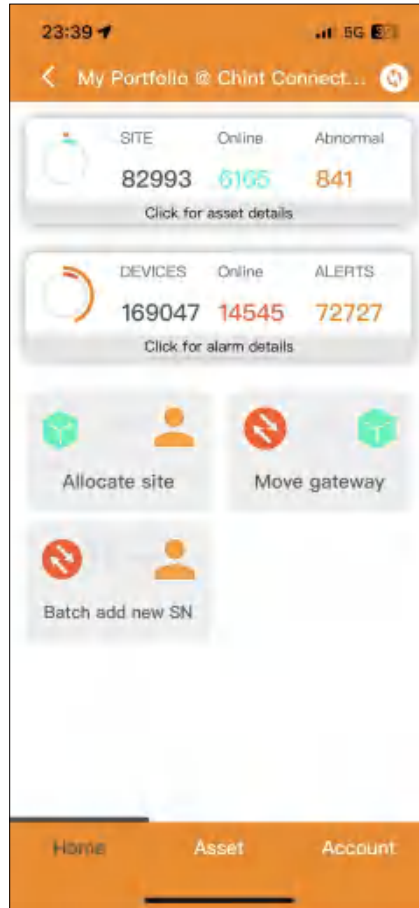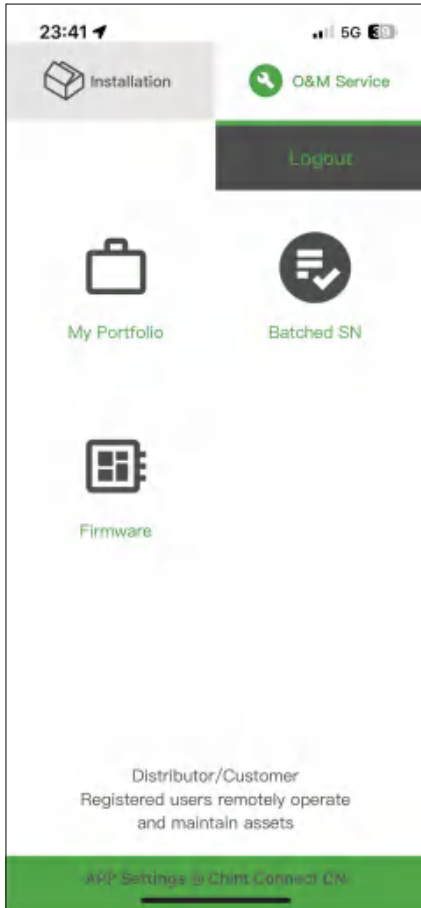



Users can add objects in bulk before gateways are shipped to target customers or periodically import gateways to be managed.

Gateways that have been successfully connected can be added in bulk on the web.

The difference is that "Batched SN" or "Batch Add New SN" is used to import inactive gateways, i.e. gateways that are not powered on, before they are shipped.

# O&M Partner

## What is "Service Code"

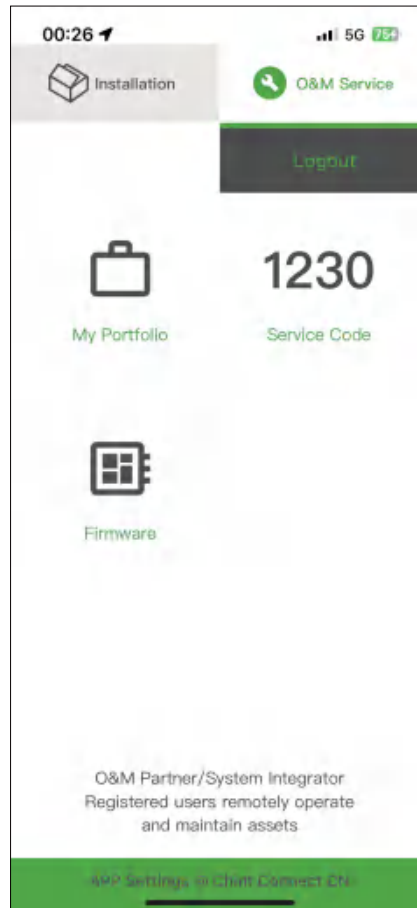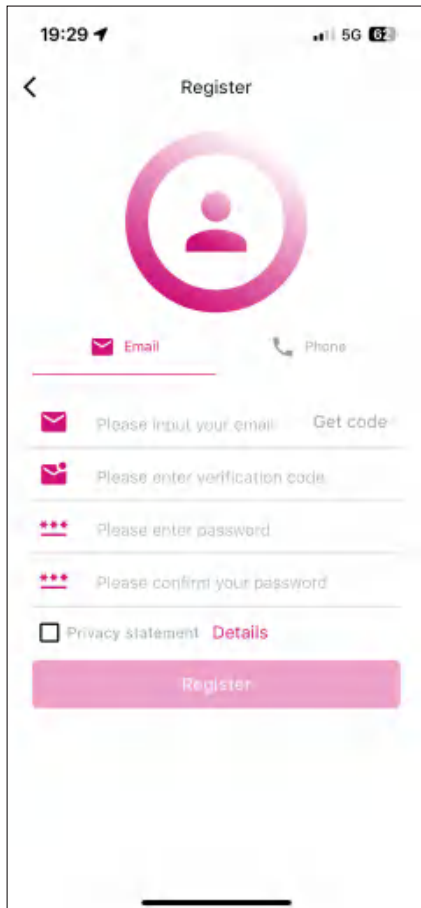

Users can self-register "O&M Partner" accounts through the APP.

When "Portfolio Owner" needs O&M Partner's services, select the target site and enter the "Service Code". and user can establish the connection.

## O&M Partner Use API to Integrate/Develop

OM Partner can integrate the "Edge Gateway + Cloud Application" capability into its own system by using [CPS Portal](#)'s API service.

Please contact [CPS or CPS customers](#) for Open API documentation and technical support.

Charging policies for API technical services may vary from product to product and region to region. Please contact [CPS sales](#) for details.



[www.chintpower.com](http://www.chintpower.com)

+86 21 37791222 -866300  
[service.cps@chint.com](mailto:service.cps@chint.com)