



AZ-PMRMC

ROOM PARTICULATE MATTER SENSOR



DESCRIPTION

The AZ-PMRMC Particulate Matter Sensor uses an optical sensor based on laser scattering principles and features innovative contamination resistance technology to perform highly accurate and reliable PM measurements. The replaceable sensor measures particles of PM1.0, PM2.5, PM4.0, and PM10, with a continuous operation lifetime of more than 8 years. The sensor will provide long-term reliability and high resolution particle size binning for the detection of environmental dust and other particles.


TYPICAL INSTALLATION

For complete installation and wiring details, please refer to the product installation instructions.

The AZ-PMRMC series can be mounted directly to a single gang electrical box or directly to a wall. The backplate includes many mounting hole configurations to allow for mounting on a variety of electrical boxes. The basic PMRMC has a screw block terminal provided for connection to the Building Automation System.

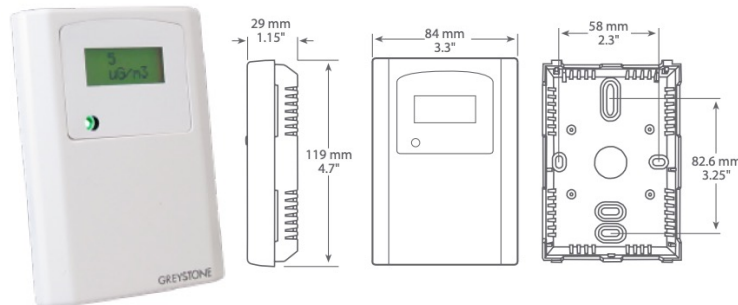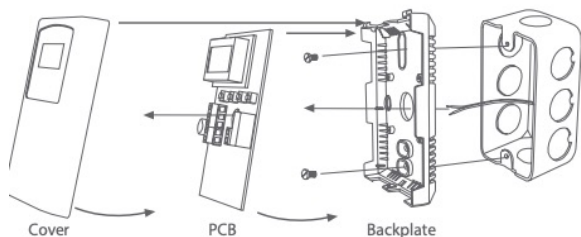

WIRING INFORMATION

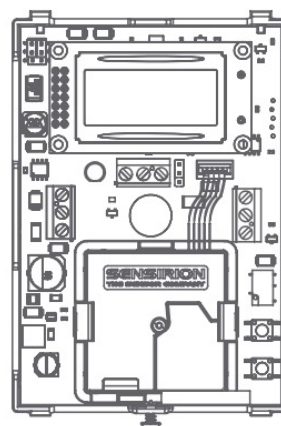

TERMINAL	FUNCTION
PWR	+ 24 Vdc/24 Vac (HOT)
COM	Common
OUT	Analog Output
NO	Digital Output
R. COM	Digital Output
NC	Digital Output
B (+)	Network Output
A (-)	Network Output
SHLD	Network Output

ORDERING

PRODUCT	PMRMC	Room Particulate Matter Sensor
LCD DISPLAY	C V	Concealed Viewable
LED	X L	None Viewable Tri-Color LED
RELAY	X R	None Alarm Relay
OUTPUT	X B M	Analog Output Only BACnet® and Analog Outputs Modbus and Analog Outputs
ACCESSORIES	PMFRSM	Replaceable Sensor Module and wire harness

PART NUMBER

PMRMC

MCERTS CERTIFICATION

The PMRMC series incorporates the SPS30 PM sensor for accurate and reliable PM sensing. The SPS30 particulate matter sensor has achieved MCERTS certification, which proves the performance of the PM sensor. In addition, the certification confirms that the SPS30 can be easily integrated into applications that comply with the European Air Quality Standard DIN EN 15267. The MCERTS certification scheme was established by the UK's Environment Agency and is built around international and European standards to ensure high quality environmental data monitoring. The SPS30 underwent laboratory and field tests and has been proven to fulfill the latest MCERTS and associated DIN EN 15267 European air quality standards. Compliance with the above-mentioned standards requires low intra-model variability ($\leq 5 \mu\text{g}/\text{m}^3$), making the SPS30 the first choice for integration into applications requiring high precision. The certification is issued by the Sira Certification Service, one of the leading notified bodies in Europe. They are also accredited according to ISO/IEC 17065 UKAS and are part of the Canadian Standards Association (CSA Group).

ALL RIGHTS RESERVED TO D-VAC SALES INC.
200B VERDI STREET, FARMINGDALE NY 11735
SALES@DVACHVAC.COM
516-256-3131



HVAC Manufacturer's Representative




AZ-PMRMC

ROOM PARTICULATE MATTER SENSOR


SPECIFICATIONS

SENSOR	Laser scatter method (field replaceable)
PARTICULATE SIZE	PM1.0, PM2.5, PM4.0, or PM10 (selectable)
MASS CONCENTRATION RANGE	0 - 1000 ug/m3
RESOLUTION	1 ug/m3
ACCURACY	±10 ug/m3 (0 - 100 ug/m3), ±10% (100 - 1000 ug/m3)
RESPONSE TIME	1 second
SENSOR LIFETIME	>8 years
ANALOG MODEL	Consumption: 75 mA max @ 24 Vdc, 100 mA max @ 24 Vac Output Signals: 4-20 mA (sourcing) or 0-5 Vdc / 0-10 Vdc (selectable) Output Drive Capability: Current - 550Ω max Voltage - 5,000Ω min Output Scale: 0 to 1000 ug/m3 (menu selectable)
BACnet® MODEL	Consumption: 50 mA max @ 24 Vdc, 80 mA max @ 24 Vac Interface: MS/TP, 2 wire RS-485 Baud Rate: 9600, 19200, 38400, 57600, 76800 or 115200 (menu selectable) Address Range: 0 - 127 (menu selectable)
MODBUS MODEL	Consumption: 50 mA max @ 24 Vdc, 80 mA max @ 24 Vac Interface: MS/TP, 2 wire RS-485, RTU Baud Rate: 9600, 19200, 38400, 57600, 76800 or 115200 (menu selectable) Address Range: 1-255 (menu selectable)
TRI-COLOR LED (OPTIONAL)	Good: Green (0 - 50 ug/m3) Moderate: Yellow (51 - 150 ug/m3) Poor: Red (151 - 1000 ug/m3)
PM ALARM RELAY (OPTIONAL)	Contact Ratings: Form C (NO + NC), 2A @ 140 Vac, 2A @ 30 Vac Setpoint + Hysteresis: Programmable via menu Time Display: Programmable via menu
LCD SIZE	35mm W x 15mm H (1.4" x 0.6")
LCD BACKLIGHT	Enable or disable via menu
DISPLAY VALUE	Mass Concentration: 0 - 1000 ug/m3 Air Quality Index: 0 - 500 AQI Good/Moderate/Poor (menu selectable)
POWER SUPPLY	24 Vac/dc ±20% (non-isolated half-wave rectified)
PROTECTION CIRCUITRY	Reverse voltage protected, over-voltage protected
OPERATING CONDITIONS	0 to 50°C (32 to 122°F), 20 to 80 %RH non-condensing
STORAGE CONDITIONS	-30 to 60°C (-22 to 140°F)
ENCLOSURE	White ABS, UL94-V0, IP30 (NEMA 1)
ENCLOSURE DIMENSIONS	84mm W x 117mm H x 29mm D (3.3" x 4.6" x 1.15")
WIRING	Screw terminal block (14 to 22 AWG)
WEIGHT	150 gm (5.3oz)
COUNTRY OF ORIGIN	CANADA


LED DISPLAY: AIR QUALITY INDEX VALUES



0 to 50: Good



51 to 100: Moderate
101 to 150: Unhealthy for Sensitive Groups



151 & up: Unhealthy

ALL RIGHTS RESERVED TO D-VAC SALES INC.
200B VERDI STREET, FARMINGDALE NY 11735
SALES@DVACHVAC.COM
516-256-3131



HVAC Manufacturer's Representative