

AZ-EZ2F

ZONE CONTROLLER

The AZ-EZ2F controller features a state-of-the-art microprocessor for reliable control of two (2) zones from a single forced-air HVAC system. The panel includes a bright, backlit LCD display with full text for system status monitoring and diagnosis. In addition, each thermostat and equipment terminal has its own color-coded LED allowing for easy monitoring of thermostat and equipment calls. The included supply air temperature sensor allows for constant monitoring of supply air temperature in the plenum. XCl's exclusive Electronic Limit Control™ (ELC) technology protects the system's compressor and heat exchanger from potential issues associated with freeze-up and over heating. Intelligent Smart-Staging™ handles equipment staging based on time and temperature, allowing the use of single-stage thermostats. Exclusive Economy Mode provides comfort and efficiency control. Supports up to 3-Stage Heating and 2-Stage Cooling equipment.

- Full-Featured 2-Zone Controller
- ➤ Electronic Limit Control
- Intelligent SmartStaging
- On-Board Fresh Air & Economizer Control
- Bright, Backlit LCD Display
- Return Ari or Fresh Air Temperature Monitoring Available
- Supply Air & Return Air Sensor Included
- Plastic Enclosure and Spare Fuse Included
- AZ's Exclusive Start-up Equipment Test Mode
 - Stand-Alone or 2-Zone Expansion Module
- LED Indicates Blown Fuse
 - Dependable Field-Proven Platform



EZ INSTALLATION

- Mounts with Two Screws
- Quick-Connect Screwless Terminals
- Innovating Enclosure Design with Multiple Wiring and Mounting Options

EZ CONFIGURATION

- Simple Step-By-Step System Setup
- Controller Guides You Thru Each Step
- Backlit LCD Display is EZ to see
- No Dipswitches No Confusion No Guessing

EZ TROUBLESHOOTING

- Display Indicates Full System Status
- Color-Coded LED Indicators for Each Thermostat Call & Equipment Call
- Two-Color LED Indicators show Damper Position
- Red LED Indicates Blown Fuse

EZ CUSTOMER FEATURES

- Customer Never Needs to Use the Control Panel
- Selectable Zone-1 Priority for More Customer Control
- Enable Emergency Heat from Zone 1 Thermostat
- Constant Supply Air Monitoring from ELC™ Ensures Customer Safety
- Zone Specific Ventilation Energize Fan from Any Thermostat

EZ OPERATION

- Mix & Match Standard Gas/Electric and Heat Pump Thermostats
- Intelligent Staging™ Based on Supply Air Temperature
- Automatic Changeover for Maximum Comfort
- Microprocessor Manages All Complex Decisions
- Adjustable Staging Time and Temperature for Maximum Comfort

ALL RIGHTS RESERVED TO D-VAC SALES INC. 200B VERDI STREET, FARMINGDALE NY 11735 SALES@DVACHVAC.COM 516-256-3131






AZ-EZ2F

ZONE CONTROLLER

'	EZ2F	8VA Max (24VAC @ 300mA)	
POWER		Separate transformer design for controller, thermostats and dampers (Field Supplied)	
		Separate RC & RH terminals for separate equipment transformers, if needed	
	System Power	8VA + Thermostats (3VA) + Dampers (3 to 10VA) = Total Transformer Size	
	Requirements	OVA - Methostats (SVA) - Bampers (5 to 10VA) - Total Hansiothici Size	
	Protection	Integrated 5x20mm 300ma Slo-Blo Fuse - One replacement also included	
	riotection	integrated 3x20mm 300ma 310-bio r use - One replacement also included	
			_
		10 AMP @ 24VAC Contact Rating	
		RH - 24VAC HOT from Heating Transformer on Equipment (RED Led)	
		RC - 24VAC HOT from Cooling Transformer on Equipment (RED Led)	
TS	Equipment	C - 24VAC COMMON from Transformer on Equipment (NO Led)	10.625"
OUTPUTS		Y1 - 1st Stage Compressor (YELLOW Led)	
		Y2 - 2nd Stage Compressor (YELLOW Led)	
		G - Fan (GREEN Led)	
		W1/EH - 1st Stage Heat OR Emergency Heat (RED Led)	
		W2 O/B - Reversing Valve OR 2nd Stage Heat (ORANGE Led)	
S		10 AMP @ 24VAC Contact Rating	
OUTPUTS		Power Close/Spring Open Dampers (10VA)	
	Dampers	Power Open/Power Close Dampers (3VA)	
INPUTS		LABEL - DESCRIPTION (LED COLOR)	
		R - 24VAC HOT (RED)	
		C - Common (NONE)	
		Y - Compressor (YELLOW)	
	Thermostat	G - Fan (GREEN)	
	mermostat	W - Heart OR Emergency Heat (RED)	
		O/B - Reversing Valve (ORANGE)	
		EC - Economy Input (GREEN) ← Zone ONE Only	
		to economy input (one ent one only	
INPUTS		10K Type II Thermistor	
	Temperature	SA Sensor - 4" Supply Air Temperature Sensor - Stainless Steel Probe w/10ft.	
		Cable and Plug (Provided with each SmartZone Controller)	
FEATURES		SPECIAL FEATURES	
	Equipment	A/C - Gas Heat	
	Capabilities	A/C - Electric Heat	
		Electric Heat Pump - Electric Auxiliary Heat	
		3 Heat/2 Cool	
	Controller	Intelligent Staging	
	Capabilities	Zone 1 Thermostat Staging Capable	
		Electronic Limit Control	
		Adjustable High and Low Limit Set points	
		Adjustable Time and Temperature Aux Heat Staging	
		Works with Most 5-Wire Thermostats with Common Terminal	
		On-Board Supply Air Temperature Monitoring	
		Back-lit LCD Display	
		LED Indicators for Thermostat and Equipment Calls	
		Exclusive Technician Run-Test Mode	
		5-Year Warranty	
		LED Indicator for Blown Fuse	1.625"

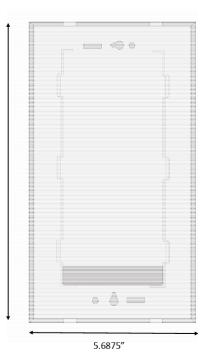

10.625"



5.6875"

ALL RIGHTS RESERVED TO D-VAC SALES INC. 200B VERDI STREET, FARMINGDALE NY 11735 <u>SALES@DVACHVAC.COM</u> 516-256-3131

