

The AZ-RPUCA series low pressure two-position & modulating damper was developed for precise control of supply air in the HVAC duct system. Rigid aluminum components provide a strong, yet lightweight construction. The damper actuator with built-in LED lights is designed for years of care-free operation. The power/open close design guarantees precise control of supply air into each zone. Long-life nylon gears drive the opposed blades open and closed. Opposed blade design reduces turbulence in the air stream. 15 second operation to full open or closed position. A minimum open position can be set to bleed air ventilation or duct balancing. End or shaft marked with high-visibility blade position indicator. Custom sizes are available. Quick turnaround on orders. Most orders ship the same day.


- DEPENDABLE POWER OPEN/POWER CLOSE/MODULATING
- LED INDICATORS FOR FULL OPEN AND CLOSED POSITIONS
- LED INDICATORS FLASH WHEN BLADE IS MOVING
- INSULATION PAD UNDER MOTOR REDUCES CONDENSATION
- AVAILABLE SIZES: 8 X 8 UP TO 30 X 30 & CUSTOM SIZES
- LIONG-LIFE ACTUATOR
- 5 YEAR FACTORY WARRANTY
- WORKS WITH MOST AFTERMARKET ZONING SYSTEMS
- WORKS WITH CARRIER/BRYANT/ION ZONIONF SYSTEMS


## **SPECIFICATIONS**

POWER	24VAC, 2 VA typical (3 VA Max)
ACTUATOR	XCI POCM Brushless Motor Design 10 in-lb Torque Power-Open/Power-Close 15 Second Operation Cycle Max 90 Degree Travel
INDICATOR	LED Indicated Full Open or Close Blink When Opening & Closing
WIRING	3 Screw Terminals PO, PC, Common Use 18/3 Solid Core Wire

## **AZ-RPUCA**

## UNIVERSAL SUPPLY AIR DAMPER 3-WIRE POWER OPEN/POWER CLOSE

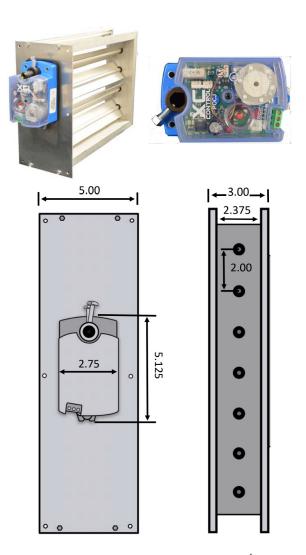



ALL RIGHTS RESERVED TO D-VAC SALES INC. 200B VERDI STREET, FARMINGDALE NY 11735 <u>SALES@DVACHVAC.COM</u> 516-256-3131

