



AZL-ERV 13 & 17

CASING

Steel casing is covered with high quality multilayer aluminium and zinc alloy to prevent corrosion. The casing is equipped with a switch to turn the ventilator off when the service panel is opened. Service access from both left and right side. For outdoor installation the roof is necessary (optional).

ENERGY RECOVERY CORE

Unique enthalpy heat exchanger provides high-efficient heat & humidity recovery. No drain pan required.

FANS

The unit is equipped with supply and exhaust centrifugal fans with backward curved blades and built-in thermal overheating protection with automatic restart. The electric motors and impellers are dynamically balanced.

DEFROST SYSTEM

Fan stop defrost system is activated when the outdoor temperature falls below 23° F (-5° C).

FILTER

Washable MERV 6 air filters in exhaust and supply air streams. Filters MERV 8, MERV 13 optional.

ERV 13

Filter type	Additional Air Pressure Drop with optional filters	
	Airflow CFM	
	300	500
MERV 8	0.03	0.05
MERV 13	0.2	0.33


ERV 17

Filter type	Additional Air Pressure Drop with optional filters	
	Airflow CFM	
	500	800
MERV 8	0.04	0.06
MERV 13	0.25	0.40

CONTROL



The unit incorporates an integrated automation and control system with following functions:

- Operation mode switch.
- Airflow balancing by supply and exhaust fan independent speed adjustment.
- Automatic recovery core frost protection.
- External control device connection.

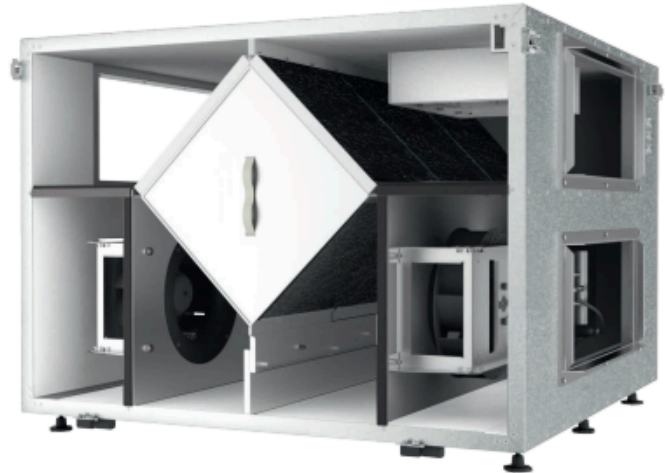

DIMENSIONS

Measurements [in]					
A	A2	H	H2	H3	L
37 1/4"	20"	26"	8"	4"	36 1/2"

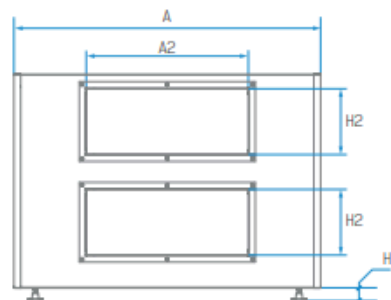
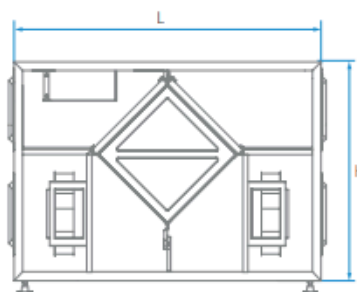






AZL-ERV 13 & 17

TECHNICAL DATA

Parameters	AIRLITE ERV 13	AIRLITE ERV 17
Voltage [V / 60 Hz]	1 ~ 120	1 ~ 120
Unit power [W]	880	1330
Unit current [A]	7.4	11.1
Minimum circuit Amps [MCA]	9.3	13.9
Maximum over current protection [MOP]	9.8	14.6
Sensible effectiveness @ max airflow [%]	63	56
Air flow @ ESP 0.4" WG [cfm]	610	1000
Air flow max [cfm]	700	1135
Transported air temperature [F]	-35 up to +140	-35 up to +140
Outer skin casing material	21 gauge galvanized steel	21 gauge galvanized steel
Insulation	1" mineral wool	1" mineral wool
Connected air duct size [in]	8x20	8x20

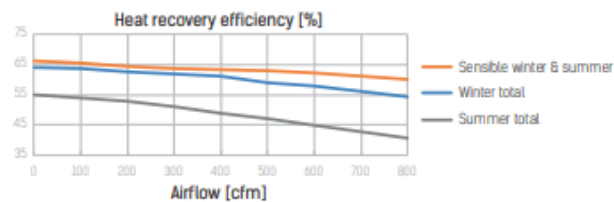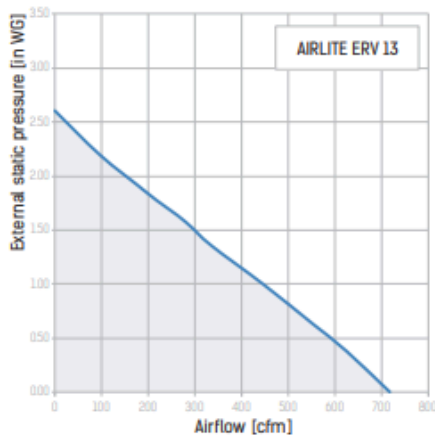

Acoustic Noise Power Chart (dBA) at unit ports		
Airflow	Fresh air to building port	Exhaust air from building port
610 CFM at 0.4 in. w.g.	74 dBA	74 dBA
240 CFM at 0.2 in. w.g.	61 dBA	61 dBA

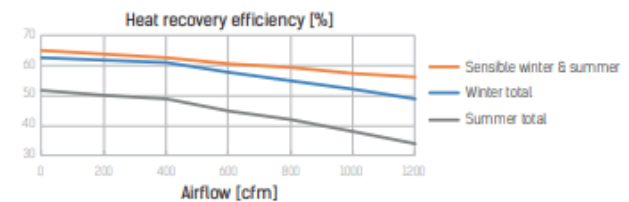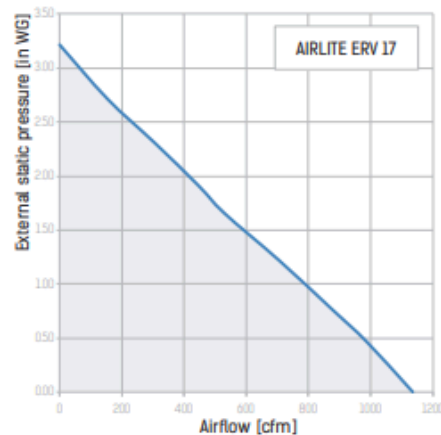

Acoustic Noise Power Chart (dBA) at unit ports		
Airflow	Fresh air to building port	Exhaust air from building port
1000 CFM at 0.4 in. w.g.	78 dBA	78 dBA
400 CFM at 0.2 in. w.g.	61 dBA	61 dBA