



AZ-BDD Backdraft Damper



Spring Loaded Backdraft Dampers

Neoprene damper seal minimizes leakage

20 gauge steel housing, aluminum spring loaded butterfly damper blades

Gasket designed to withstand temperatures from -22 F to 180 F


Requires from 0.04 to 0.08 inches wg pressure to open

Simple installation in any position – entire assembly inserts into duct


Exterior foam gasket assures a tight seal against duct

4", 5", 6" & 8" models include stamped metal sleeve with center pin design


10" & 12" models include rolled metal sleeve with center post design

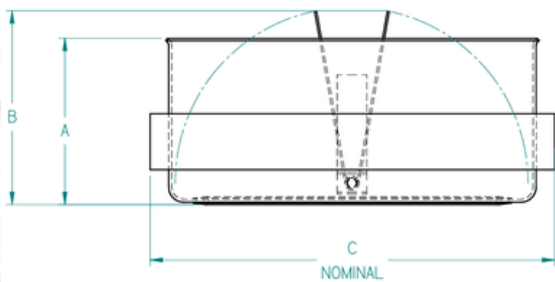

DAMPER		DIMENSIONS (IN INCHES)		
MODEL	SIZE	A	B	C
BDD100	4	1.75	2.00	3.80
BDD125	5	2.00	2.50	4.80
BDD150	6	2.50	3.00	5.80
BDD200	8	2.75	3.75	7.80

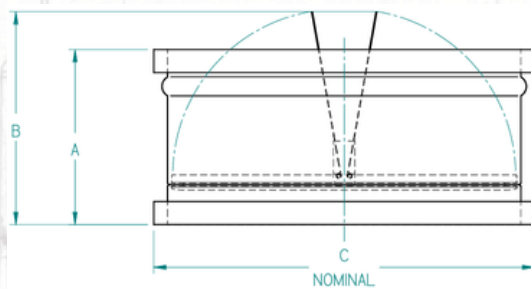

DAMPER		DIMENSIONS (IN INCHES)		
MODEL	SIZE	A	B	C
BDD250	10	4.75	5.75	9.8
BDD300	12	6.25	6.75	11.8

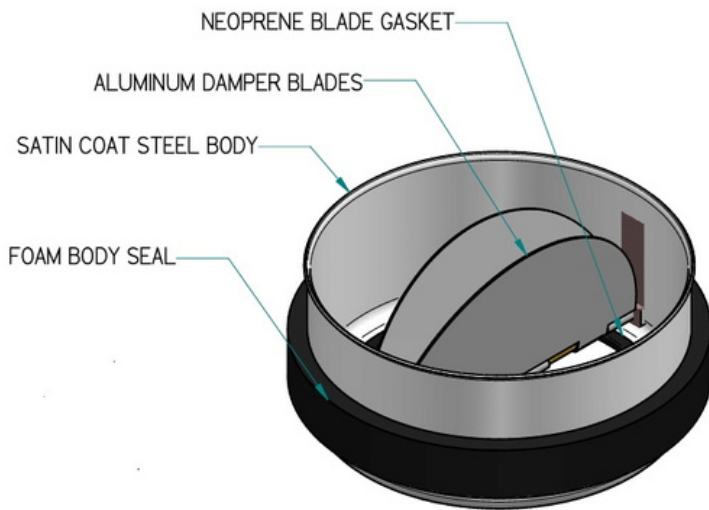

DDC : DIRECT DIGITAL CONTROLLER
 DB : DISTRIBUTION BOARD (LIGHTING PANEL)
 S/S : START/STOP
 ST : STATUS