

## PROGRAMMING USING AN EXISTING REMOTE

Using a (Original) remote already paired to the device, position yourself within 3m of the gate motor.

### ON THE ORIGINAL, ALREADY PAIRED REMOTE:

1. Press the hidden button on back of remote with a pin or paper clip or Press Buttons 1 + 2 simultaneously until the remote LED illuminates
2. Momentarily press the button that triggers the device

### ON THE NEW REMOTE:

1. Press the hidden button on back of the NEW remote with a pin or paper clip or Press Buttons 1 + 2 simultaneously until the remote LED illuminates
2. Press the button on the NEW remote that you want to trigger the device
3. Wait around 60 seconds for the device to reset and then test the new remote

For additional NEW remotes, please repeat the above steps for as many remotes required.

### PLEASE NOTE:



Some versions of the BFT MITTO remotes do not have a hidden button on the back of the remote, in this instance, Press Buttons 1 + 2 simultaneously until the remote LED illuminates.

## PROGRAMMING VIA THE RECEIVER LCD SCREEN

### PLEASE NOTE:

At least one Remote must be already coded to device

1. On the Receiver, Press RED Button 3, Twice
2. On the Receiver, Press RED Button 2, to scroll down to the Radio (RADio) menu item
3. Press OK RED Button 3, the menu shows START
4. Press OK RED Button 3, Menu says 'Hidden Button Coded Remote'
6. Press the hidden button on the back of the NEW remote with a pin or paper-clip, OR on the NEW remote, Press Buttons 1 + 2 simultaneously
7. Press Buttons 1 + 2 simultaneously until the remote LED illuminates
8. Menu = Released
9. Then Press the desired button on the NEW Remote you want to trigger the device, until the menu says 'OK'.
10. Menu moves to add
11. Press OK RED Button 3 on the Receiver
12. Repeat for further remotes OR, Press Red Buttons 1 + 2 buttons together to end programming

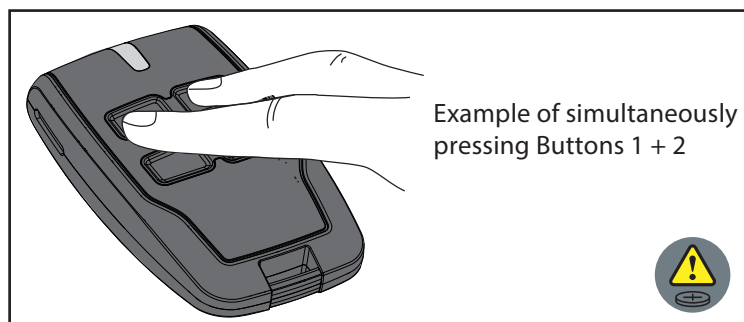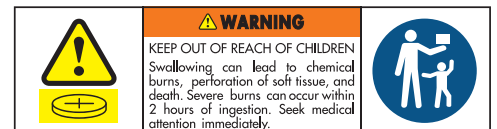

### IMPORTANT NOTE:

Some equipment supplied by BFT stockists may be totally electronically programmed. The receiver will only pair with transmitters that have been coded electronically.

If you cannot manually code a new remote, then they must be programmed by a suitably trained BFT supplier using a special computer based programming tool.

Remote World do not offer any onsite service, and will not be responsible for remotes that cannot be manually paired to a receiver, any such process will be at the cost of the purchaser.