


www.9w2wbi.com
fendy@9w2wbi.com

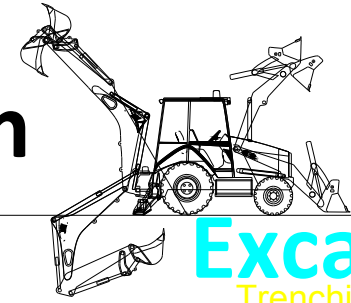

Excavation Table
Trenching size 1 feet / 1 1/2 feet / 3 feet

Formula :
Depth X width x Sg X length

Reminder :
width are refer to road cut size hor gitu

General note :

1. Untuk premix spec JKR standard depth ialah 50mm gross 50mm fine finish = 100mm depth
2. Untuk Crusher Run Standard Road spec is 300-350mm

Depth Bucket	600mm		800mm		1000mm		1200mm		1400mm		Premix Crusher Run	
	Soil out	Sand fill	Soil out	Sand fill	Soil out	Sand fill	Soil out	Sand fill	Soil out	Sand fill		
1 feet ^{12"} 12" X 25.4 = 304.80mm	12m 5,486kg	12m 1,828kg	12m 7,315kg	12m 3,657kg	12m 9,144kg	12m 5,486kg	12m 10,972kg	12m 7,315kg	12m 12,801kg	12m 9,144kg	12m 2,743kg	12m 914.4kg
1 1/2 feet ^{16"} 18" X 25.4 = 459.00mm	12m 8,262kg	12m 2,754kg	12m 11,016kg	12m 5,508kg	12m 14,850kg	12m 8,262kg	12m 16,524kg	12m 5,508kg	12m 19,275kg	12m 14,850kg	12m 4,131kg	12m 1,377kg
3 feet ^{36"} 36" X 25.4 = 914.40mm	12m 16,459kg	12m 5,486kg	12m 21,945kg	12m 10,972kg	12m 27,432kg	12m 16,458kg	12m 32,916kg	12m 21,945kg	12m 38,404kg	12m 27,432kg	12m 8,229kg	12m 2,743kg
3 feet 36" X 25.4 = 914.40mm	12m 16,459kg	12m 5,486kg	12m 21,945kg	12m 10,972kg	12m 27,432kg	12m 16,458kg	12m 32,916kg	12m 21,945kg	12m 38,404kg	12m 27,432kg	12m 8,229kg	12m 2,743kg
1 meter 1000.00mm	12m 18,000kg	12m 6,000kg	12m 24,000kg	12m 12,000kg	12m 30,000kg	12m 18,000kg	12m 36,000kg	12m 24,000kg	12m 42,000kg	12m 30,000kg	12m 12,000kg	12m 3,000kg

Hak Cipta Terpelihar ©
01 SEPTEMBER 2023 - VERSION 01 | REVISION 00
Prepared by : Mohammed Affendi Bin Buang

MF036 Mohammed Affendi Bin Buang 791115-086291 0111-0606425/011-55546425/03-51616425 monambm3223@gmail.com

Prepared by :

.....

Supervisor

Date :

Checked by :

.....

Manager

Date :

Approved by :

.....

CEO

Date :