

MILLENNIUM 2000 DOOR

Transmittance

$U_w \geq 2.3$ (W/m²K)

Consult typology, dimensions and glass.

Acoustic insulation

Maximum glazing	30 mm
Minimum glazing	3 mm
Maximum acoustic insulation	Rw = 38 dB

Sightlines

Frame		Door	
	45 mm		2.0 mm
Sash	45 mm		

Profile Thickness

Maximum dimensions / Sash

	Side hung Door	Automatic Door	Swing Door
Width (L)	1,450 mm	2,000 mm	1,100 mm
Height (H)	3,000 mm	3,000 mm	3,000 mm

Consult maximum weight and dimensions according to typologies.

Maximum weight / Sash

- 180 Kg (Side hung door)
- 190 Kg (Automatic side hung door)
- 120 Kg (Automatic sliding door)
- 150 Kg (Swing door)

Categories achieved at test centre

Protection against atmospheric agents.

Resistance to soft body impact

(UNE-EN 13049:2003): Class C5 (max)

* Reference test 1.80 x 2.20 m / 2 sashes.

Laminated glass 3+3

Test verified by

ALUMINIOS CORTIZO S.A.U.

Extrusion alloy

6063 T-5

Finishes

Colour powder coating (RAL, mottled & rough).

According to Qualicoat >60 microns

Wood effect powder coating.

According to Qualideco standard

Anodised.


According to Ewwa Euras / Standard Class 15 / Optionally Class 20 and 25

Opening possibilities



Inward opening: 1 & 2 sash side hung door and automatic 1 & 2 sash side hung door.

Outward opening: 1 & 2 sash side hung door and automatic 1 & 2 sash side hung door.

Swing Opening: 1 & 2 sash side hung door.

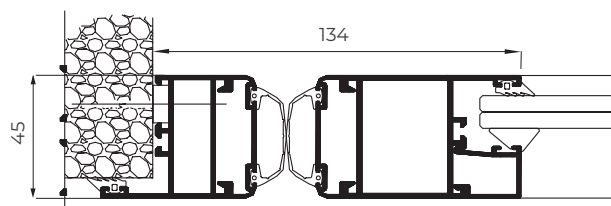

Automatic sliding version

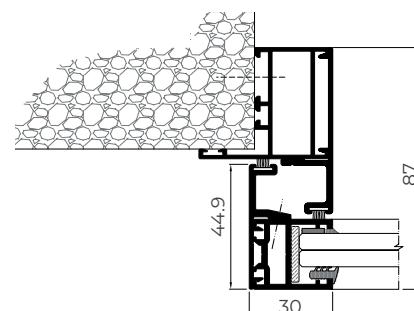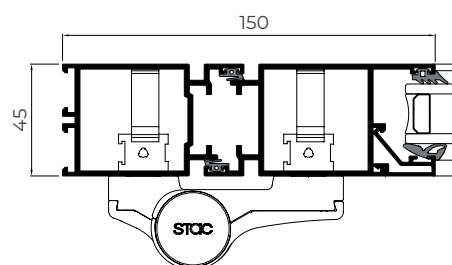

Automatic sliding version with slim profiles.