

# EZ- FOLDING / ROLLING DOOR CART - 2 DOOR EZTRUNK™ ASSEMBLY

## MANUAL

#1921 0082 / #1900 0082

### MAKE IT EZ

Print the latest manual &  
Watch the EZTRUNK Video



Scan QR CODE for Video &  
PDF MANUALS



## Customer Service

*Any questions? WE ARE HERE TO HELP!*

Text or Call **203-901-0055** / Call **203-591-9060**






**EMAIL US: SERVICE@EZTRUNK.NET**

*7 days a week 8:00 AM - 8:00 PM EST*

## WE CAN HELP YOU!

PO# :

**Please read instructions fully before beginning assembly**

NO	Illustration	Description	Part #	QTY.
1		Upper Frame Tube	81401	1
2		Base Frame Tube	81402	1
3		Side Plate	81404	4
4		Door Hinge Pin Bracket	81406	6
5		Wheel Castor	81408	5
6		Bottom Wheel Castor Plate	81409	5
7		U Bolt	81410	6
8		Thumb Turn Nut	81411	2
9		Rectangle Plate	81412	2
10		Straight Base Tube	81413	2
11		Locking Pin	08352	4
12		Side Plate / Base Frame Tube Bolt	08452	8
13		Nylon Washer	1408010	16 + 2 extra
14		Washer (On U Bolt)	1206010	8 + 2 extra
15		M8 Washer (On Wheel)	1608010	5
16		Plastic Cap For Nut	20082	5
17		Large Lock Nut	10082	13+ 2 extra
18		Small Lock Nut	10062	10+ 1 extra
19		#5 Allen Wrench	#5	1
20		#10 & #13 Wrench	#10	1

**1**

Clip the wheel plate to the Base Frame Tube, tighten the nuts on the wheels. Place plastic caps on the wheel nuts.

**2**

Small hole is facing up

Place the bottom wheel Castor plate on wheel assembly to straight base tube. The small hole is facing up. Tighten the bolts and then place plastic caps on the wheel nuts.

**3**

Put the Nylon washers on the inside of the plates on both sides as shown

Connect the two plates and tubes together. Tighten the two middle upright tube screws. The folding outside screws should be snug not tight, so the bottom folding base swings up easily. The base should not drop down unless you pull it down.

**4**

Insert the locking pins to secure the base.

**5**

Place door hinge pin brackets on the upright tubes and snug the nuts so they are adjustable to your door in the next steps.


**6**

Place middle door hinge pin bracket on the upright tubes. Snug the nuts so they are adjustable to lock down your door in the next steps. The Middle bracket is a locking mechanism. This protects the doors from falling off when moving the cart.

**7**


Make sure the cart is on level ground when loading the doors

Roll your windows down before disconnecting the electrical plugs.

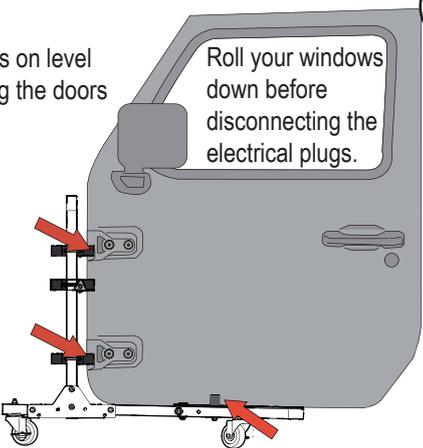

Place the doors on the cart with the bumpers on the outside and adjust the brackets so they are hitting the top of the door hinge brackets. Tighten the cart hinge brackets so they do not move. Make sure the cart is on level ground when loading the doors.


**8**

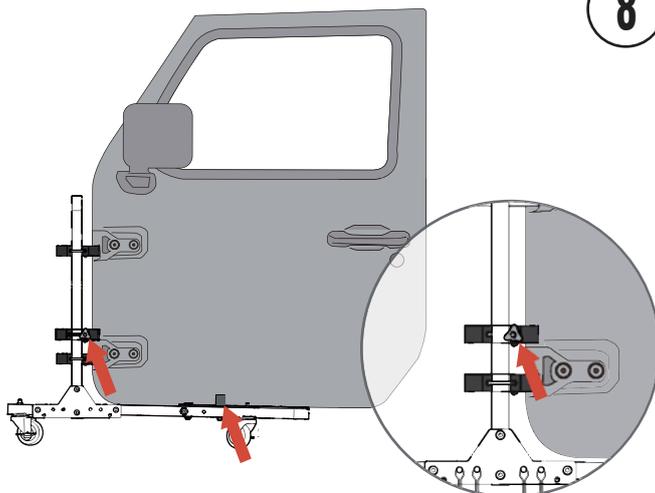

Slide down the safety hinge lock and thumb turn to tighten. This locks the doors in place for moving and storage.

**How To Lock The Castor**


**9**

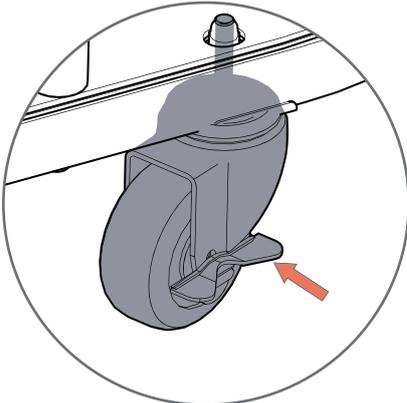

Lock the wheels for storage.


**Folding The EZ-Door CART**

**10**

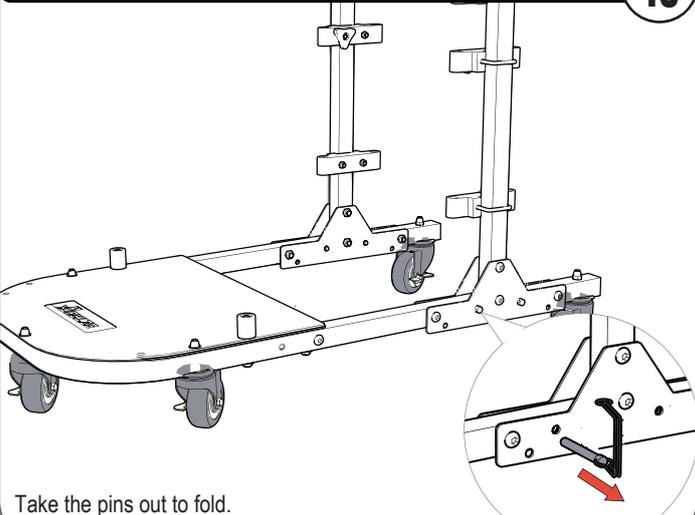

Take the pins out to fold.

**11**

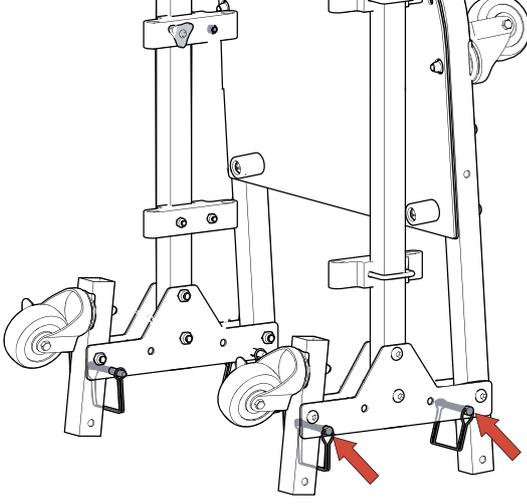

Place the pins in the bottom locking holes and store the other pins in the holes.

# Customer Service

*Any questions? WE ARE HERE TO HELP!*

**203-901-0055 / Call 203-591-9060**  
**EMAIL US: [SERVICE@EZTRUNK.NET](mailto:SERVICE@EZTRUNK.NET)**

*7 days a week 8:00 AM - 8:00 PM EST*

**WE CAN HELP YOU!**