
EZ-FOLDING / ROLLING DOOR CART- 4 DOOR EZTRUÇK™ ASSEMBLY

MANUAL


#1900 0084

MAKE IT EZ

Print the latest manual & Watch the EZTRUNK Video Part # 1900 0084



Scan QR CODE for Video & PDF MANUALS

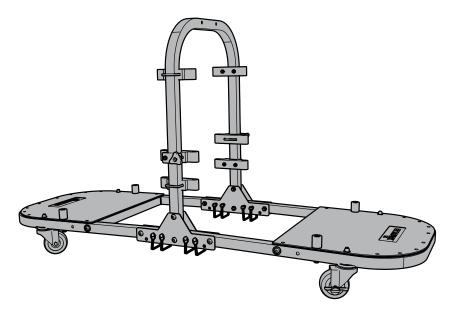

RECOMMENDED TOOLS

#2 Phillips Screw Driver

Customer Service

Any questions? WE ARE HERE TO HELP!

Text or Call 203-901-0055 / Call 203-591-9060 EMAIL US: SERVICE@EZTRUNK.NET

7 days a week 8:00 AM - 8:00 PM EST

WE ARE HERE TO HELP YOU!


PO#:


Please read instructions fully before beginning assembly


NO	Illustration	Description	Part #	QTY.
1		Upper Frame Tube	81401	1
2		Base Frame Tube	81402	2
3		Base Frame Tube	81403	2
4	000000	Side Plate	81404	4
5		Base Frame Plate	81405	2
6		Door Hinge Pin Bracket	81406	6
7		Plastic Bumper	81407	4
8		Wheel Castor	81408	4
9		Bottom Wheel Castor Plate	81409	4
10		U Bolt	81410	6
11	(B)	Thumb Turn Nut	81411	2
12	0 0	Rectangle Plate	81412	2
13		Locking Pin	08352	8
14		Side Plate / Base Frame Tube Bolt	08452	12
15		Plastic Bumper Bolt	56652	4
16	\odot	Washer For Wheel Castor	1808012	4
17	0	Plastic Cap For Nut	20082	4
18		Large Lock Nut	10082	12+ 2 extra
19		Small Lock Nut	10062	14+ 2 extra
20		#6 Allen Wrench	#6	1
21		#10 & #13 Wrench	#10	1

PATENT NO.: 10,981,588 & PATENT PENDING CUSTOMER SERVICE: SERVICE@EZTRUNK.NET Text & Call: 203-901-0055 / Call 203-591-9060

BEFORE BEGINNING, SEE THE ASSEMBLY INSTRUCTION VIDEO ON **EZTRUNK.NET**

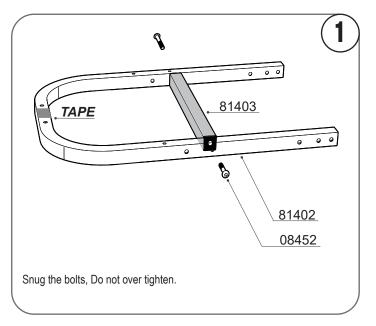

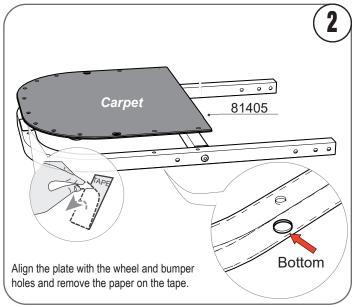





Place the washer between the plate and the carpet for the wheel assembly. Put the nuts on but don't tighten.


Place the plastic bumper screw in the plastic so the head of the screw is below the top of the plastic.

Tighten all bolts and then place plastic caps on the wheel nuts.

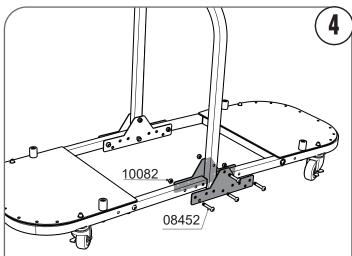


Connect the two plates and tubes together. Tighten the two middle upright tube screws. The folding outside screws should be snug not tight, so the bottom folding base swings up easily. The base should not drop down unless you pull it down.

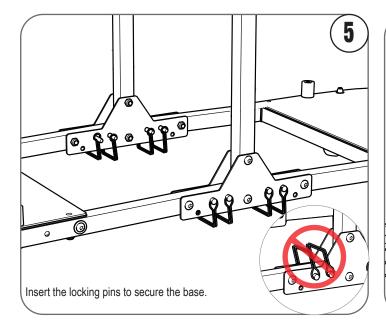

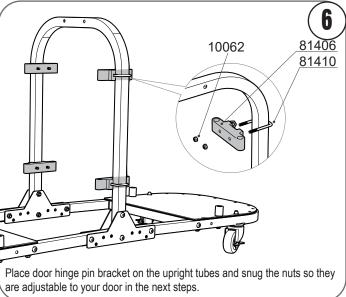


PATENT NO.: 10,981,588 & PATENT PENDING CUSTOMER SERVICE: SERVICE@EZTRUNK.NET Text & Call: 203-901-0055 / Call: 203-591-9060


BEFORE BEGINNING, SEE THE ASSEMBLY INSTRUCTION VIDEO ON **EZTRUNK.NE**7

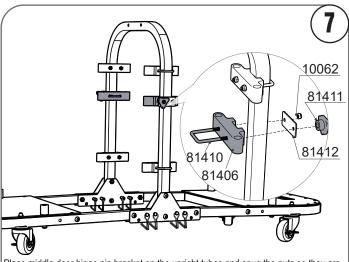


Place middle door hinge pin bracket on the upright tubes and snug the nuts so they are adjustable to lock your door in the next steps. The Middle bracket is a locking mechanism. This protects the doors from falling off when moving the cart.

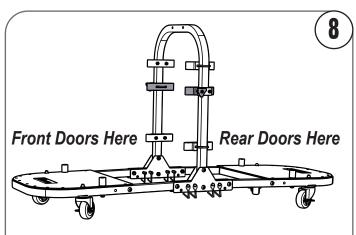



Roll your windows down before disconnecting the electrical plugs. Place the rear door from one side of the vehicle on the EZ-Door Holder Cart first. Then put the same side front door on EZ-Door Holder Cart. SLIDE THE MIDDLE LOCK IN THE DOWN POSITION when moving the cart to the other side. Take the doors from the other side off the same way. This distributes the weight on the cart.



of the door hinge brackets. Tighten the cart hinge brackets so they do not move

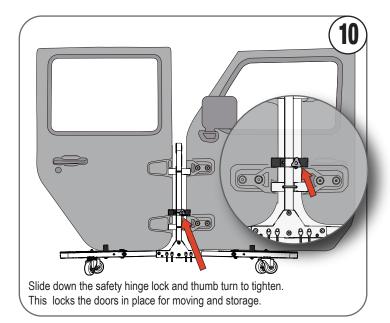


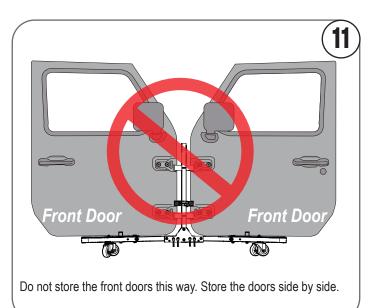


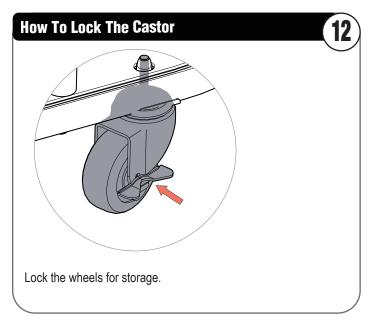

PATENT NO.: 10,981,588 & PATENT PENDING **CUSTOMER SERVICE: SERVICE@EZTRUNK.NET** Text & Call: 203-901-0055 / Call 203-591-9060 1900 0084-A814-Ver. A 9/26/21

BEFORE BEGINNING, SEE THE ASSEMBLY INSTRUCTION VIDEO ON **EZTRUNK.NET**

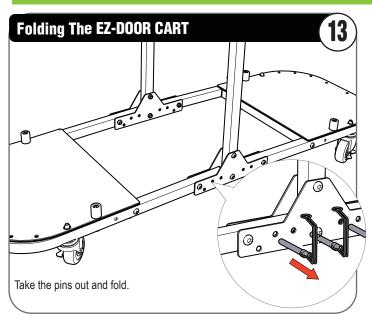

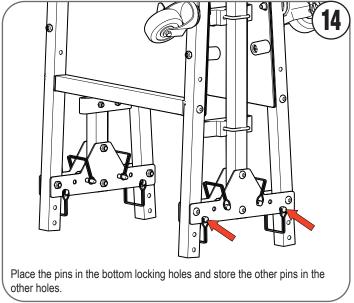

Customer Service

Any questions? WE ARE HERE TO HELP!

Text or Call 203-901-0055 / Call 203-591-9060 EMAIL US: SERVICE@EZTRUNK.NET

7 days a week 8:00 AM - 8:00 PM EST

WE ARE HERE TO HELP YOU!

PATENT NO.: 10,981,588 & PATENT PENDING CUSTOMER SERVICE: SERVICE@EZTRUNK.NET Text & Call: 203-901-0055 / Call 203-591-9060

1900 0084-A814-Ver. A 9/26/21