



JK

EZTRUNK

ASSEMBLY MANUAL

LOT# : **BEFORE BEGINNING, LOOK AT ASSEMBLY VIDEO ON EZTRUNK.COM**



Customer Service

If you have a question or concern

EMAIL US: SERVICE@EZTRUNK.NET

or call **203-591-9060** or **203-901-0055**

Monday-Friday 8:30am -4:30pm EST


PDF manual on www.EZTRUNK.com

DO NOT RETURN TO THE STORE

CUSTOMER SERVICE:
SERVICE@EZTRUNK.NET
CALL: 203-591-9060 OR 203-901-0055

BEFORE BEGINNING, LOOK AT ASSEMBLY VIDEO ON EZTRUNK.COM

Please read instructions fully before beginning assembly

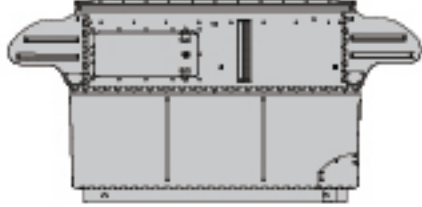NO	Illustration	Description	Part #	QTY.
1		Trunk	201121	1
2		Panel_Back	2011213	1
3		Panel Head Bolt M6x40	76401	2
4		Star Wrench_T27	60027	1
5		Webbing Hook_Driver	11256	1
6		Webbing Hook_Passenger	11257	1

RECOMMENDED TOOLS

PHILLIPS SCREWDRIVER

PLEASE NOTE:


DO NOT USE ELECTRIC TOOLS THIS WILL CAUSE SCREWS TO STRIP

CUSTOMER SERVICE:

SERVICE@EZTRUNK.NET

CALL: 203-591-9060 OR 203-901-0055

Figure A

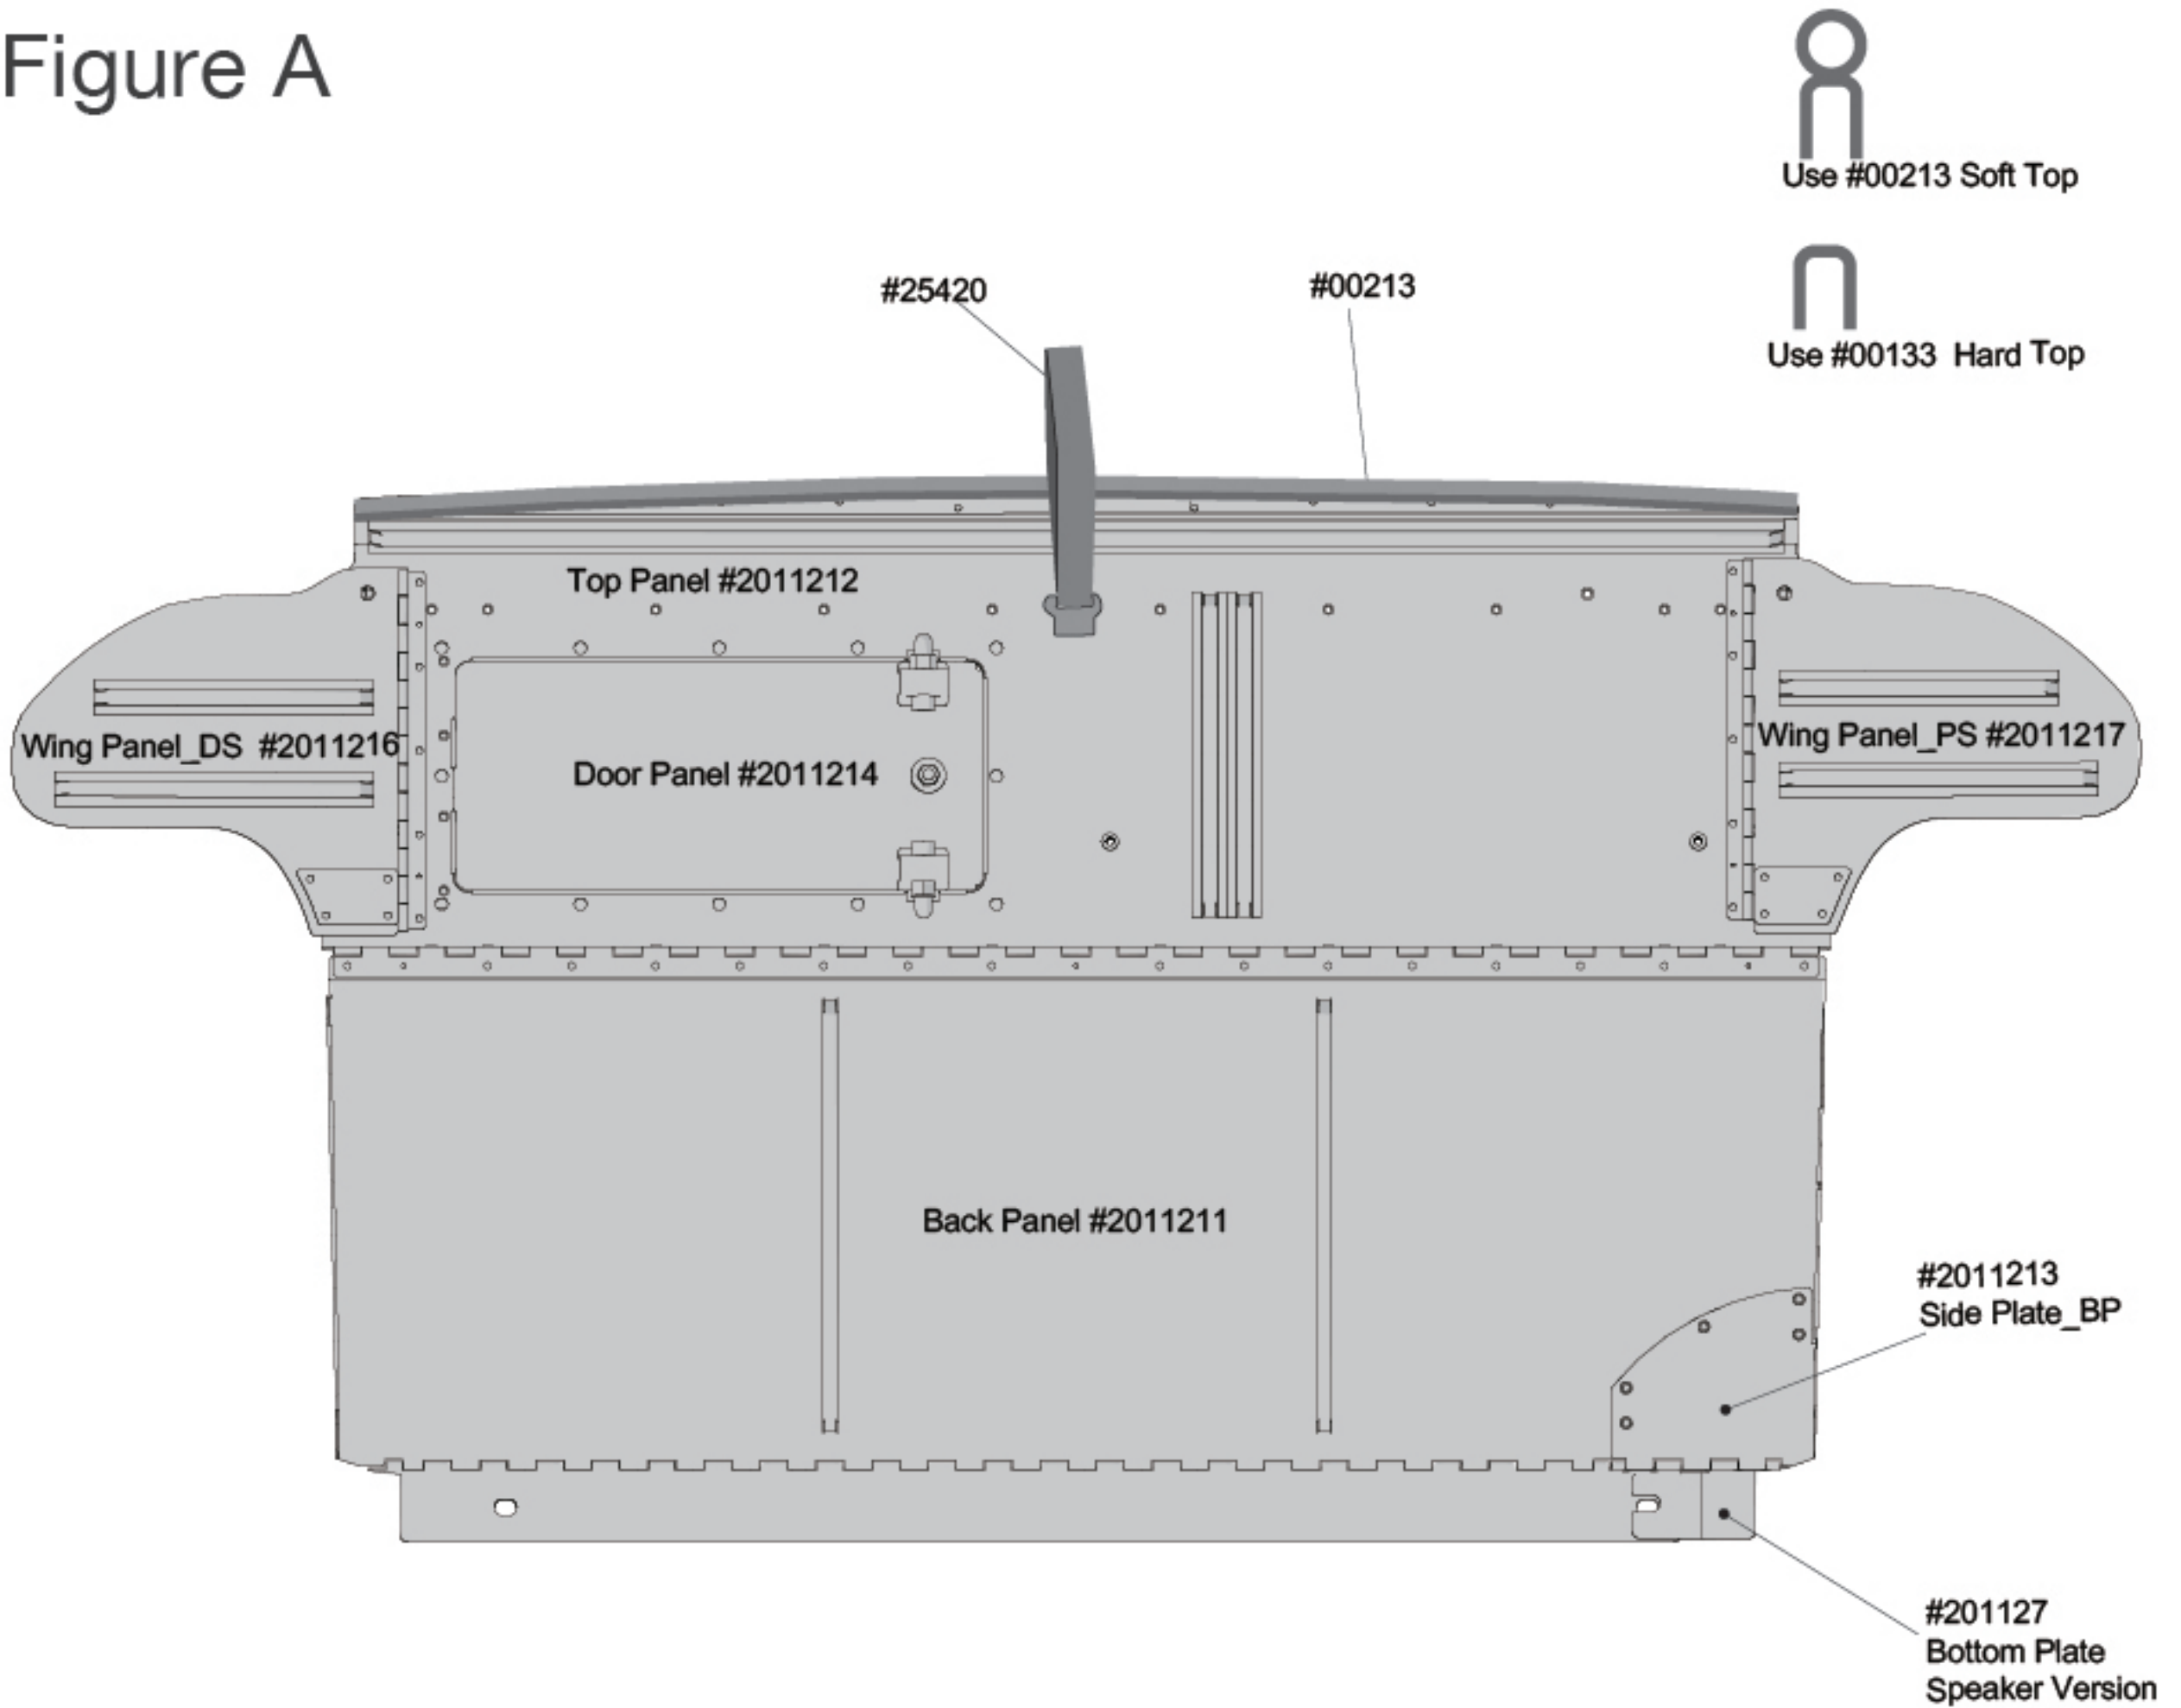

Driver side

Passenger side

PLEASE NOTE:
DO NOT USE
ELECTRIC TOOLS
THIS WILL
CAUSE SCREWS
TO STRIP

USE SCREW
DRIVER


DO NOT
OVER
TIGHTEN

* DS = Driver Side
PS = Passenger Side
BP= Back Panel

BEFORE BEGINNING, LOOK AT ASSEMBLY VIDEO ON **EZTRUNK.COM**

Speacker Version


1

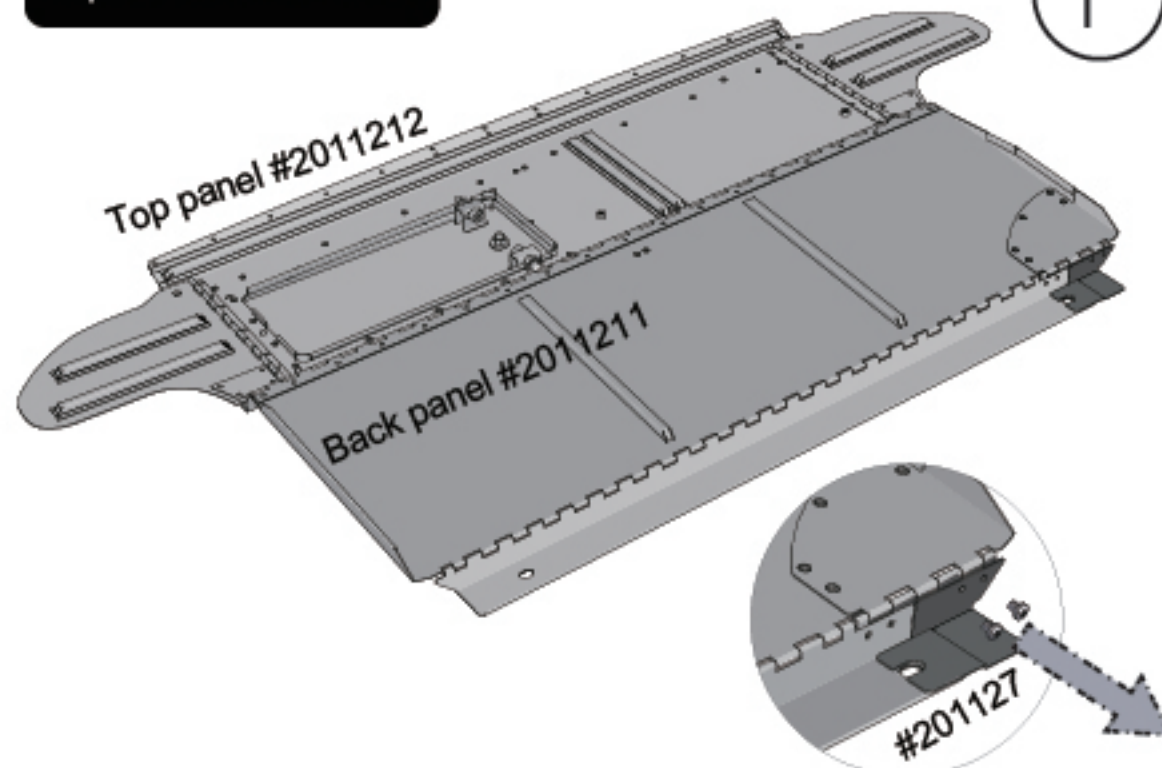

1. With Speacker version, Remove screws and Bottom plate #201127 on passenger side.

Speacker Version


2

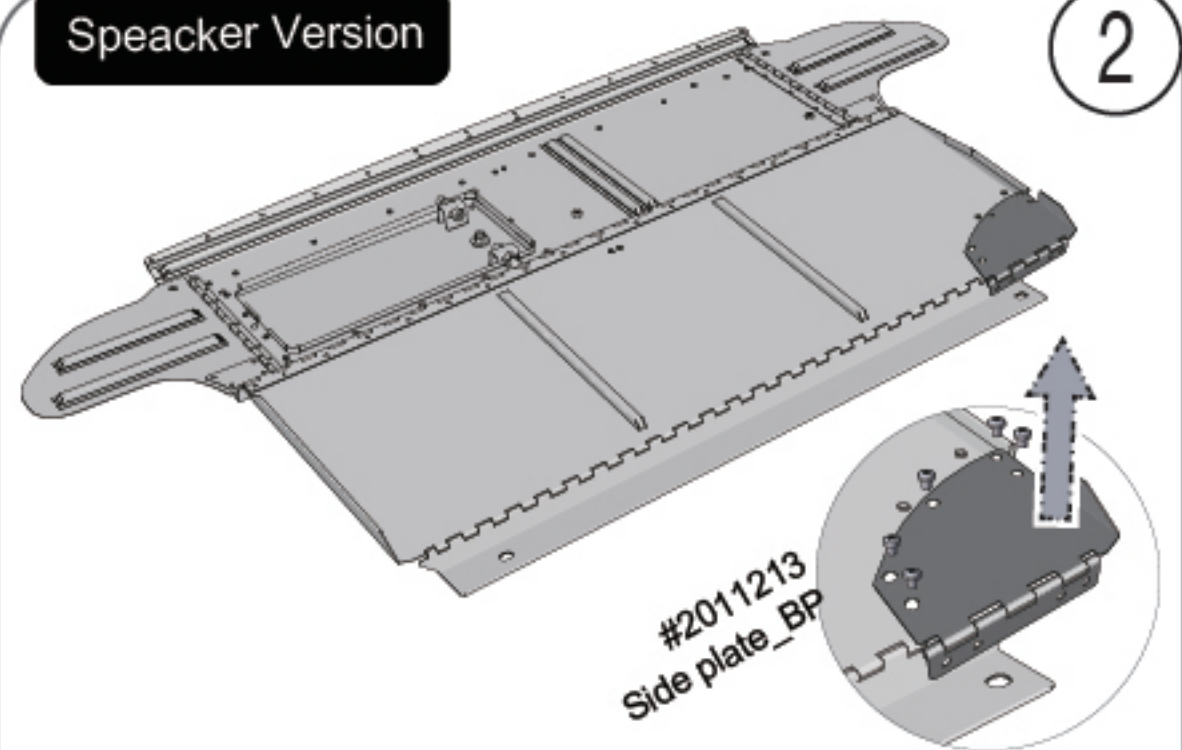

1. With Speacker version, Remove 5 pieces screws and Side plate_BP #2011213 from Back panel passenger side.

Speacker Version

3

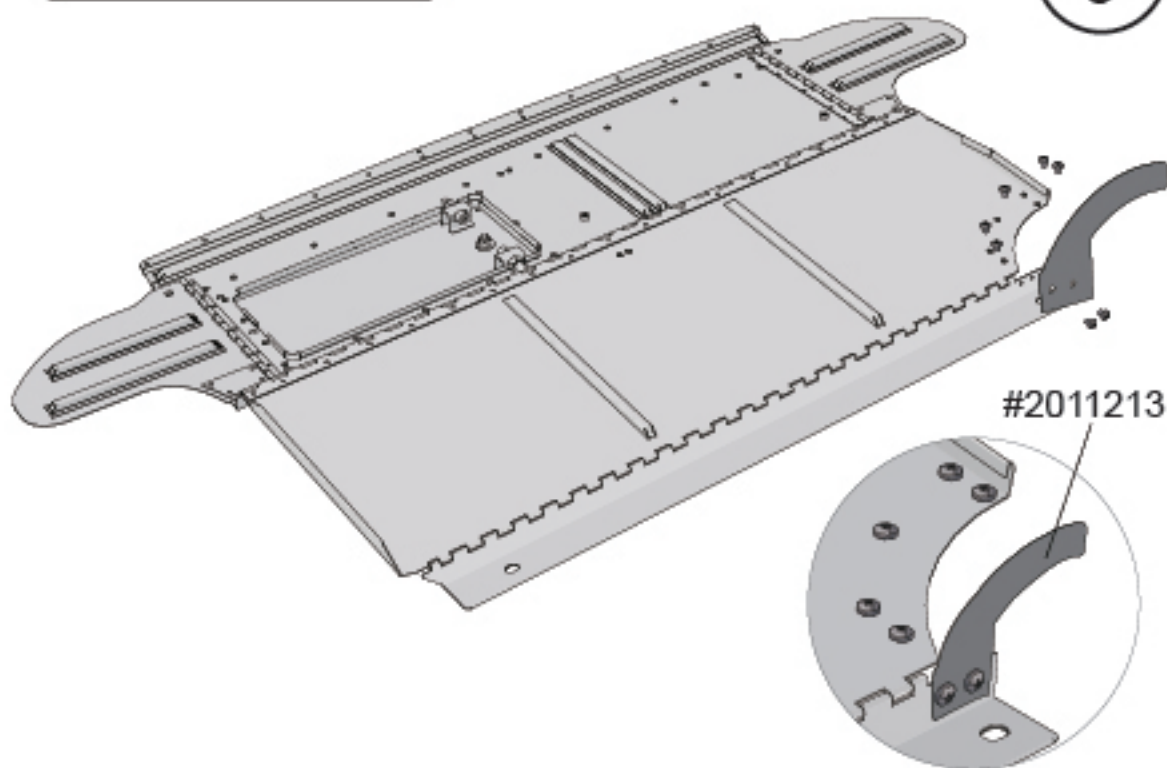


1. Istall 7 screws back to holes



1. Remove D rings and bolts from Driver and Passenger side.


5

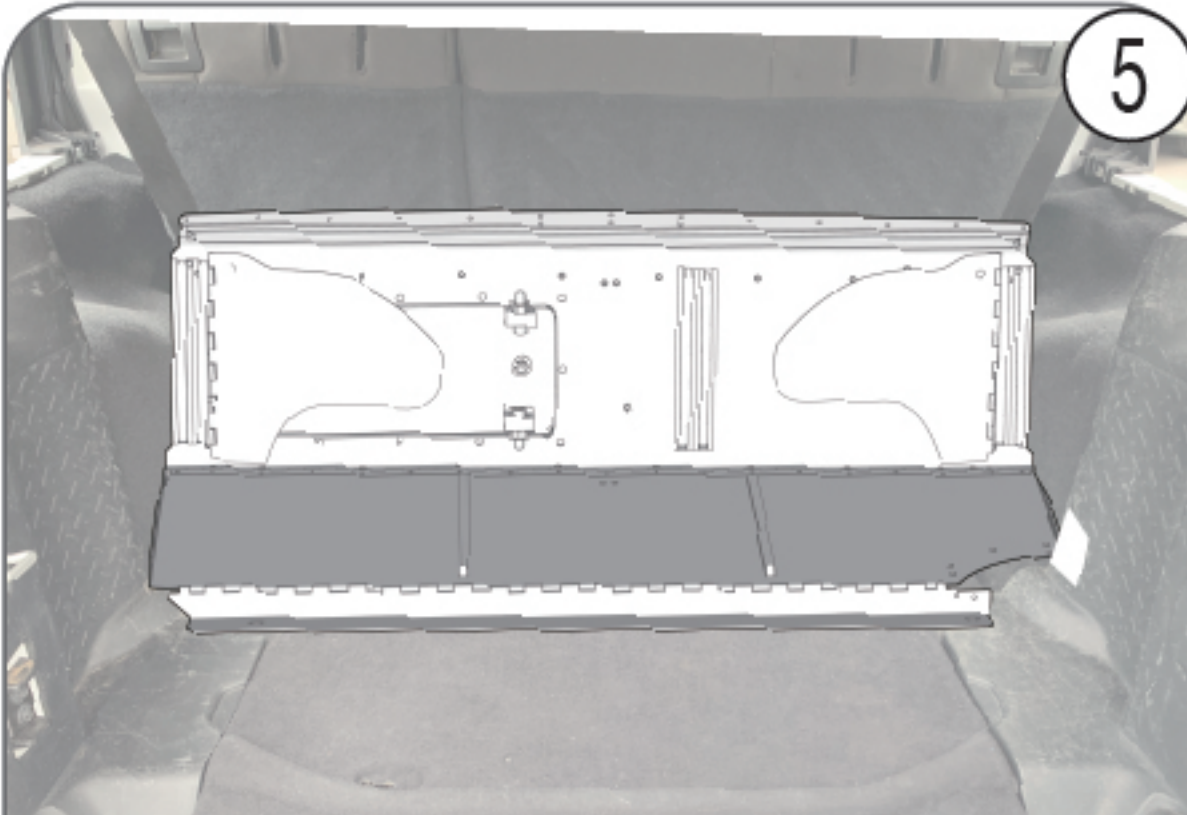

1. Load the EZTRUNK into Jeep
2. Make sure there is an even gap on each side of the panel

Driver side





6

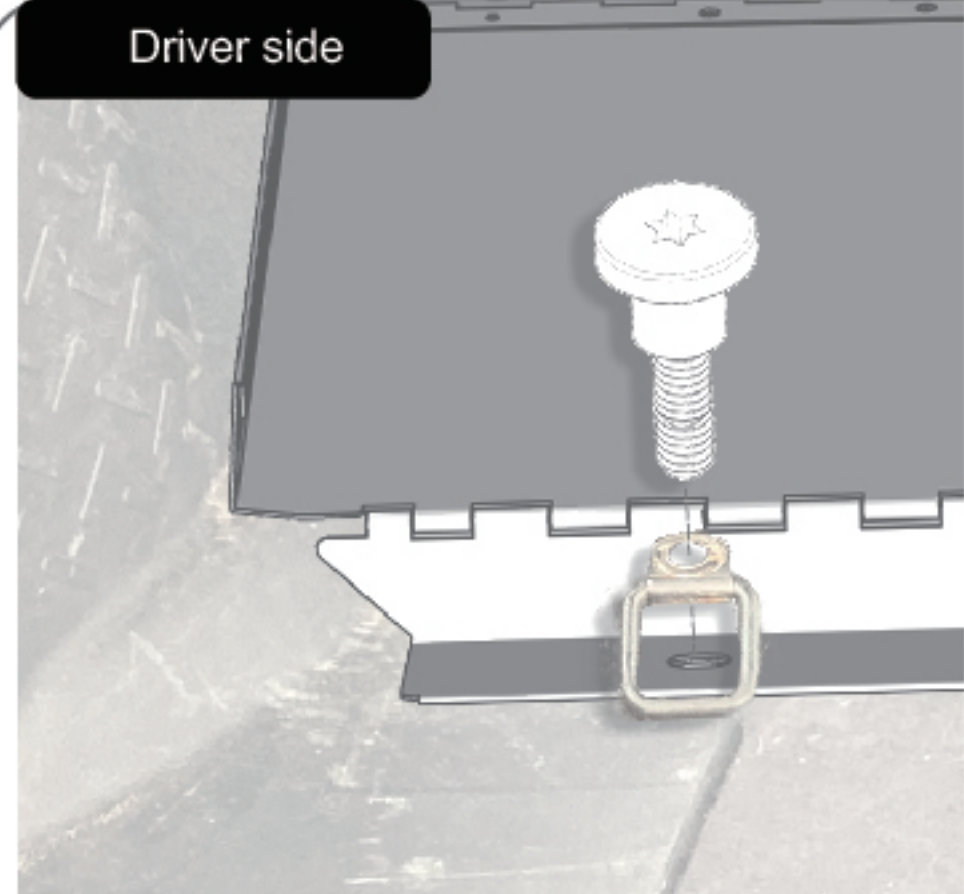

1. Bolt D ring and Bottom plate to Jeep

CUSTOMER SERVICE:
SERVICE@EZTRUNK.NET
CALL: 203-591-9060 OR 203-901-0055

BEFORE BEGINNING, LOOK AT ASSEMBLY VIDEO ON **EZTRUNK.COM**

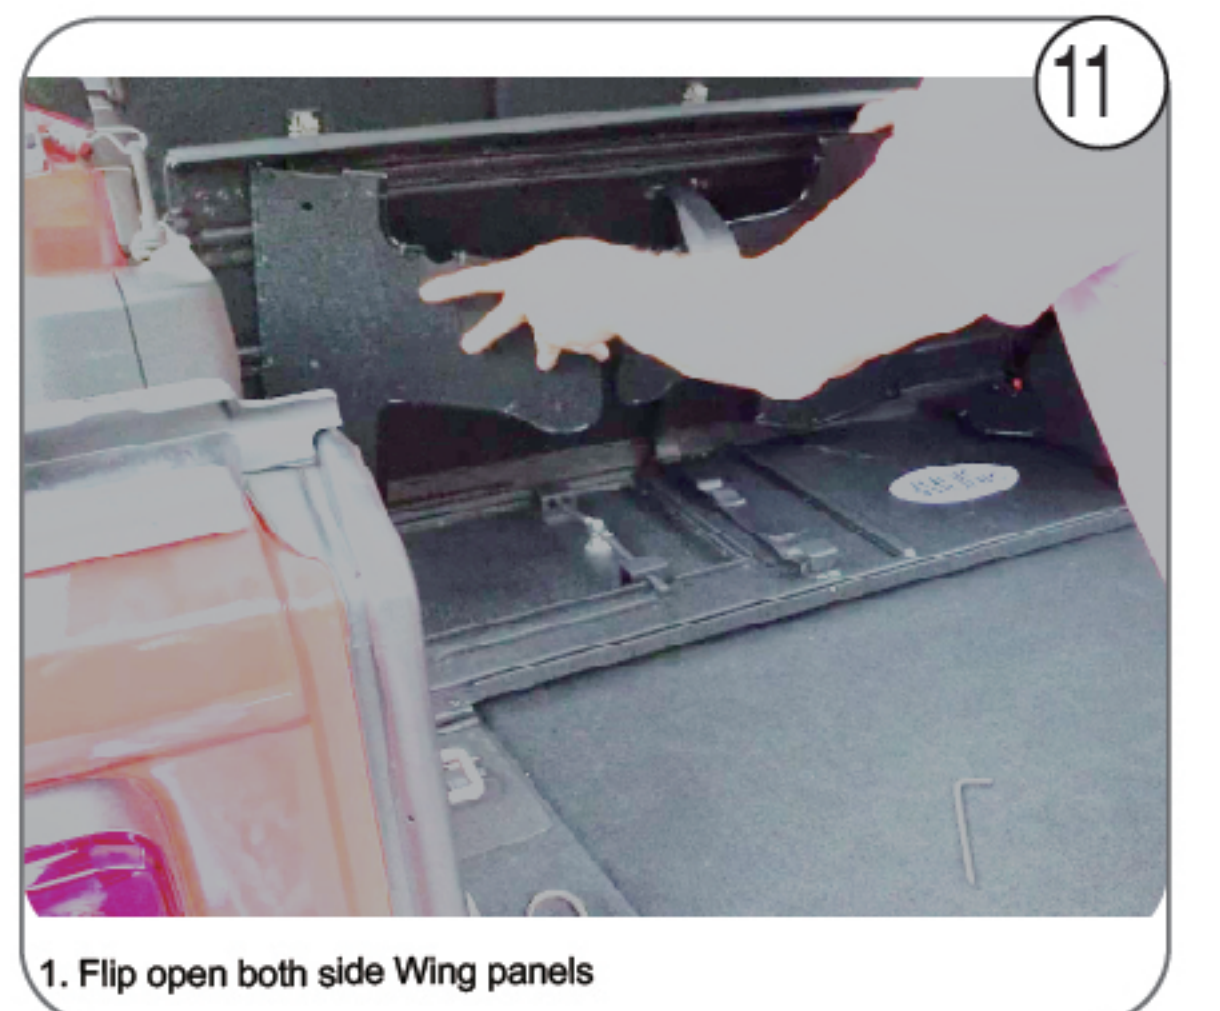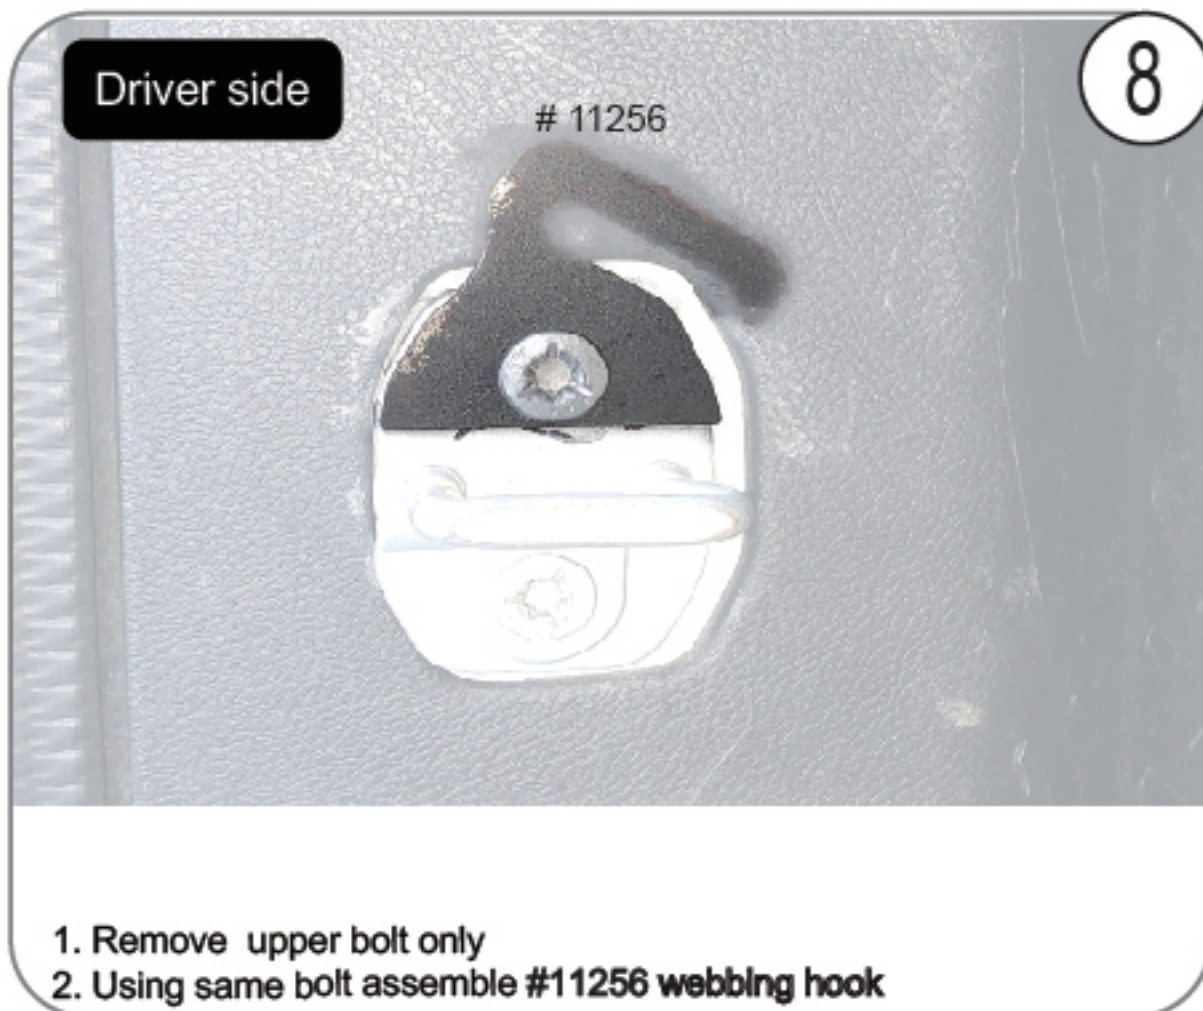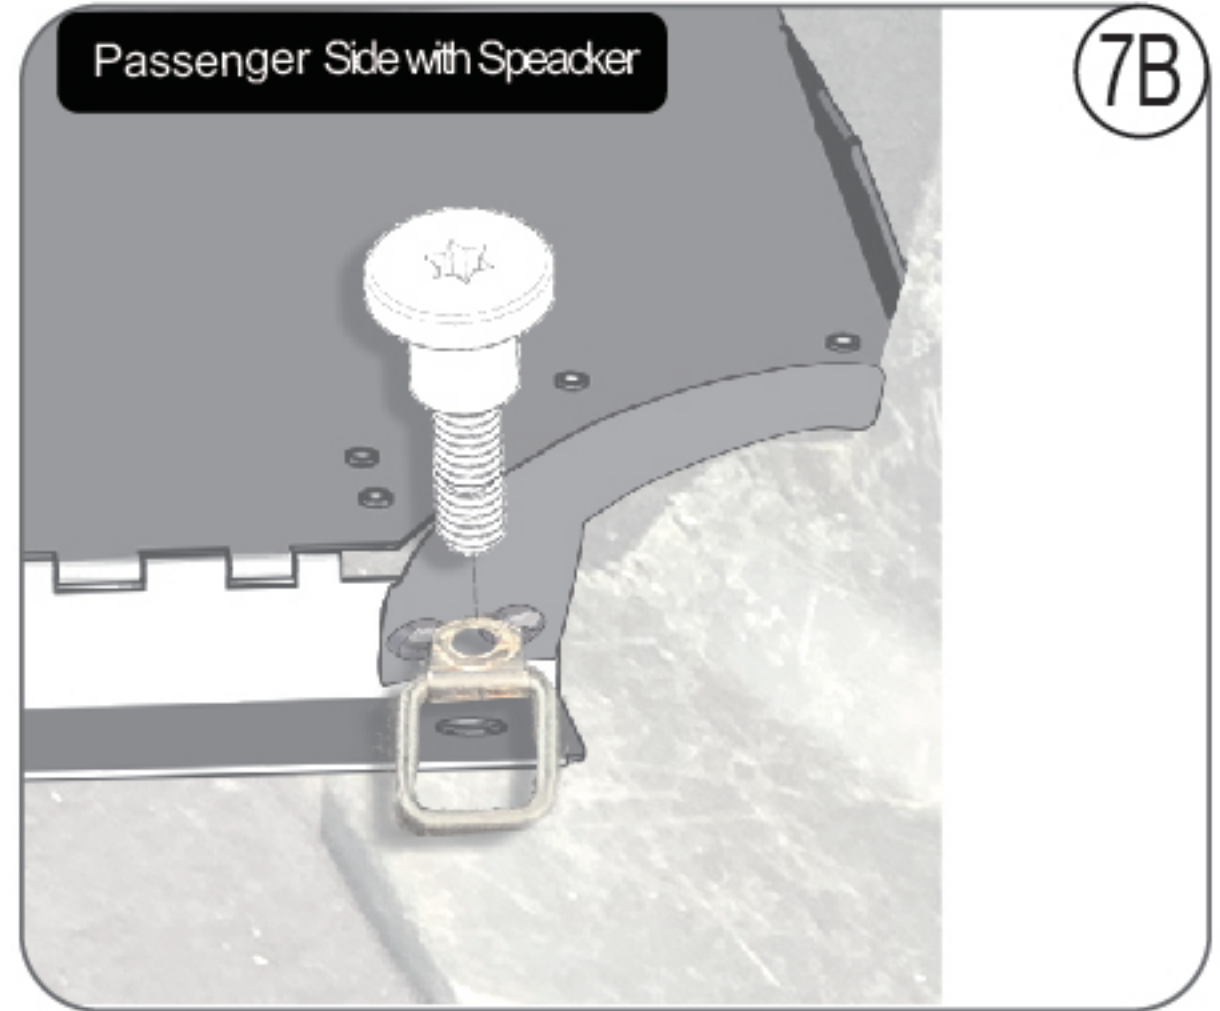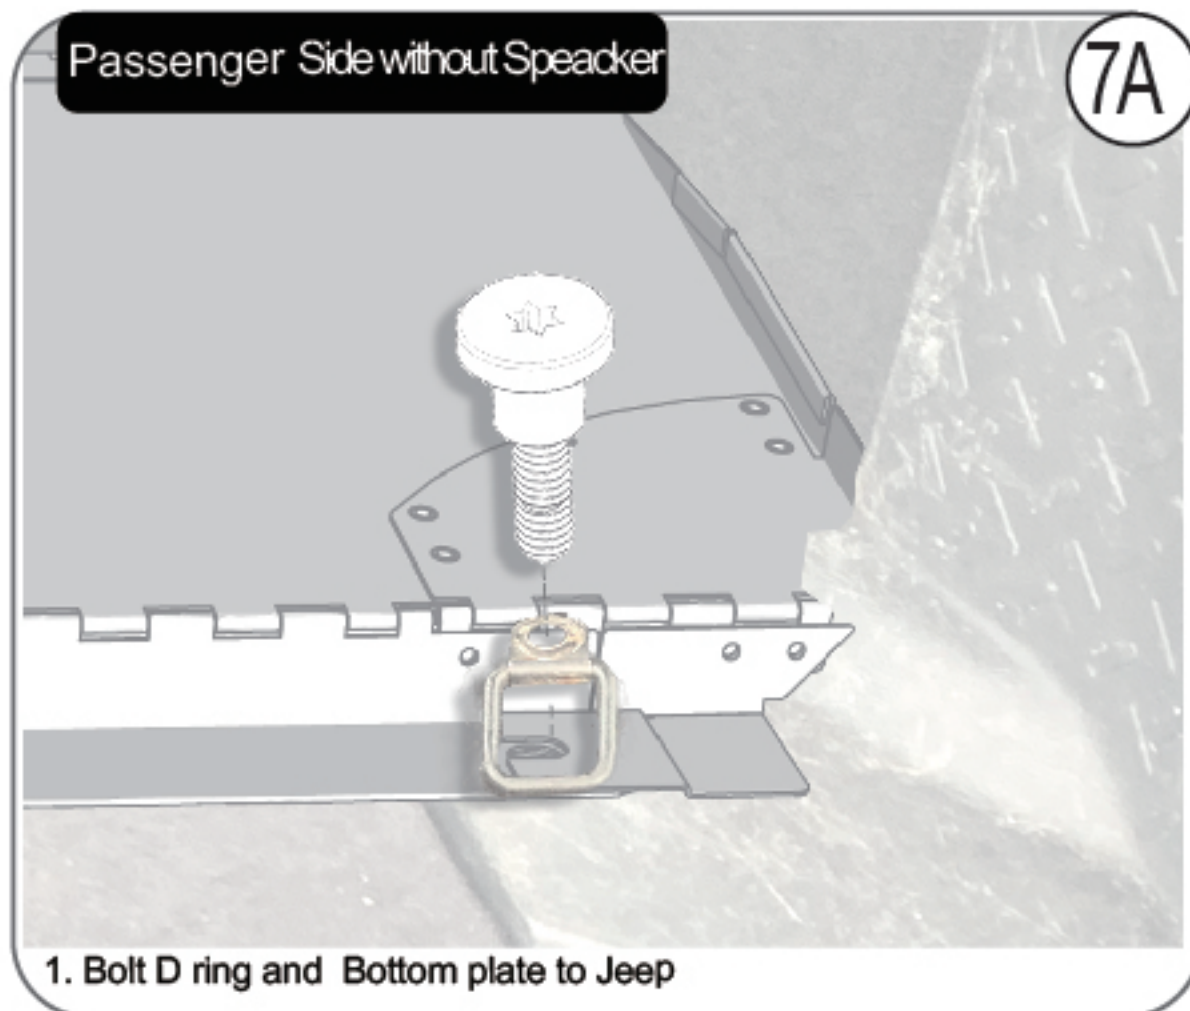

CUSTOMER SERVICE:
SERVICE@EZTRUNK.NET
CALL: 203-591-9060 OR 203-901-0055

11



Hold both wing panels slowly put down top panel.

12



Driver side

1. Slide webbing loop in place
2. Secure EZTRUNK by pulling on the end of the webbing



Passenger side

13



1. Slide webbing loop in place
2. Secure EZTRUNK by pulling on the end of the webbing

14



PLEASE NOTE



SOFT TOP

THIS RUBBER PIECE COMES ON EZTRUNK AND IS FOR SOFT TOP



HARD TOP

IF CHANGING TO HARD TOP REMOVE RUBBER PIECE USED FOR SOFT TOP AND REPLACE WITH HARD TOP RUBBER

Customer Service

If you have a question or concern

EMAIL US: SERVICE@EZTRUNK.NET

or call **203-591-9060** or **203-901-0055**

Monday-Friday 8:30a m -4:30 pm EST

PDF manual on www.EZTRUNK.com