

ecoair[®]

Cooling Systems Solutions

Eco-Friendly and Economic Cooling Solutions



About Ecoair

Incorporated in 2011, Ecoair Cooling Systems, is the leading Indian manufacturer of Industrial Evaporative Air Coolers, High-Volume Low-Speed (HVLS) Fans, Exhaust Fans and other Ventilation products.

Ecoair's prestigious customer base is supported globally through dedicated service teams and a strong partner network across multiple projects and locations. Ecoair's UL/CE certified products have a design philosophy focused on safety, quality, customer requirements, reliability and durability. Ecoair products offer the best global technology at the most competitive pricing with assured hassle free service support and spares.



Ecoair cooling and ventilation systems create comfortable environments in Industrial Shopfloors, Warehouses, Railway Stations, Airports, Restaurants, Kitchens many other public places by supplying Cool, Filtered, Fresh, Oxygen rich air controlling humidity and temperature using innovative, customized solutions as per customer requirements.

Our Purpose

We commit to be on the journey of creating simple, economic and eco-friendly functional air solutions for cool and comfortable ambience for that are enhancing productivity. We are customer-focused and create customized solutions. Our core values are fundamental to our existence and will continue to guide the way we conduct business.

We continuously strive to create comfort

- Comfortable cooling, drop temperature up to 20°C with high air flow
- Fresh, filtered, cool and oxygen rich air
- Dust control
- Control the humidity and temperature
- Proper air distribution
- Open space cooling
- Exhausting large volumes of air

Ecoair Product Range



HVLS FANS

High-Volume Low-Speed (HVLS) fans are large ceiling fans that provide a cooling effect on people, with a perceived temperature reduction of 4 to 6 degrees for the human body. One fan can replace multiple wall-mounted fans, reducing power consumption by up to 70%, with a payback period of less than 6 months. These fans are a cost-effective and energy-efficient solution for improving air circulation and comfort in large industrial and commercial spaces.

Page No. 04



EVAPORATIVE AIR COOLING

Evaporative Air Cooling is one of the most economical and traditional methods of cooling an environment. These coolers use CelDek pads and work on the principle of evaporation. They can achieve fresh air and comfort cooling of up to 20 degrees. Energy-efficient motors reduce power consumption and are environmentally friendly. The UV-treated body enables the use of the machine in any harsh environment.

Page No. 10



EXHAUST FANS

Exhaust fans are meant for ventilation and ensuring air changes as per statutory requirements in shop floors, warehouses, assembly lines, garment factories, food processing facilities, etc. Energy-efficient motors with direct drive reduce power consumption, and SS blades are corrosion resistant and facilitate better heat dissipation. Gravity louvers prevent dust ingress when the fan is switched off.

Page No. 11



YU GO FANS

YU GO are portable floor-mount HVLS fans. Mobility is the USP of these fans, as they can be moved to any location with ease. They provide higher coverage in a uni-direction and are suited for applications where ceiling-mounted HVLS fans cannot be installed, such as warehouses, party lawns, and marriage halls.

Page No. 13



AIR CIRCULATORS

Air Circulators are 2x2 grid fans designed to be installed in false ceilings. In combination with air conditioners, they reduce the load on AC units and eliminate hot spots, thus improving air circulation and maintaining a uniform room temperature.

Page No. 16


Ecoair Geared HVLS Fans




Benefits & Safety Features

- High Performance industrial fans
- Single fan replaces multiple wall mounted fan
- Distributes air up to 28,000 sq.ft., corner to corner, outstanding coverage without draft.
- Up to 80% Reduction in running costs and payback in 6 months.
- Variable speed Control using VFD to set and control airflow. Reverse operation options.
- Earn LEED credits for sustainable design.
- 6061 T6 Aluminum Alloy Used for Aerofoil Blades.
- IP 55 Motor & Gearbox with Synthetic Oil from Germany-world leaders in Transmission Technology.
- High Grade Steel upto 12mm thick with Hot Dip Galvanizing for best anti corrosion protection.
- PVC Coated GI wire ropes with 700Kg Tensile Strength (each)
- Extremely high levels of world class primary safety for all components:
 - 40 mm Shaft Dia.
 - M14 Bolts for Structure & Chassis
 - Nylock Nuts and Thread Locker for all fasteners
 - Steel EN 10025 - 90 for Structure & Chassis with additional CED Coating, Etc.

HVLS Fans Air Flow Pattern

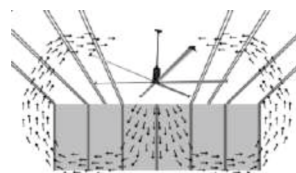

Air Flow Pattern

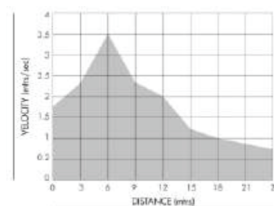

Distance vs Air Velocity

Ecoair HVLS Specifications


(Optional IE3 Motor IPCC)

MODEL NO.	FAN DIAMETER	POWER SUPPLY	MOTOR	AIRFLOW (CFM)	HEIGHT FROM FLOOR(Mtr)	ROTATION (RPM)
EAHVLS 7E	24 Feet	3ph	1.5 kw	378,000	9/11.5	52
EAHVLS 6E	20 Feet	3ph	1.5 kw	288,000	9/11.5	66
EAHVLS 5E	16 Feet	3ph	1.1 kw	225,000	6/7.5	72
EAHVLS 4E	12 Feet	3ph	1.1 kw	130,000	5/6.5	85
EAHVLS 3E	10 Feet	3ph	0.75 kw	99,000	5/6.5	110
EAHVLS 2.4E	08 Feet	3ph	0.75 kw	87,000	5/5.5	120

Note: Our Fan is compatible with Three Phase supply. * As Per Standard Test Conditions

(*weight of HVLS fan - approx 150Kgs (dynamic weight))

Standard Applications

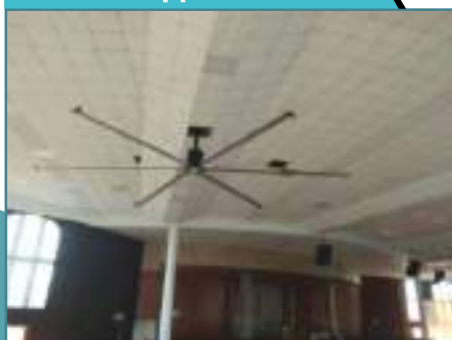

Ecoair EMF PMSM HVLS Fans



Features & Advantages

- PMSM- (Permanent Magnet Synchronous Motor), Brushless Motor with High Torque at Low RPM.
- Exceptionally Low Maintenance- Service interval > 1,00,000 Hours, with 24x7 operation continuously at full speed.
- One of The Worlds Most Energy Efficient Motors- 30% Lower Power Consumption, compared to normal HVLS Fans.
- Extremely Low Sound - No Gearbox, Direct drive less than 45 db @ 1mtr
- High Pole Motor-66 poles & 6 pole winding specially designed for HVLS fan application
- 5 Blade 6061T6 Aluminum Alloy blade - High Strength & Durability
- Primary and Secondary Safety features for Anti Fall Protection for all components of the Fan.
- 0% Derating of the fan performance over the life of the fan.

Best Suited For Application


- 24x7 Operation & Low Sound Applications.
- Airports, Railway Stations, Bus Stands, etc Auditorium, Cinema Halls, Theaters, etc.
- Air Conditioned Building to Lower A/c Running cost.
- Warehouses, Shop Floors, Factories.
- Malls, Shopping Centers, Departmental Stores, Temples, Mosques, Churches, Prayer Halls.

Ecoair PMSM Fan Specifications

MODEL NO.	FAN DIAMETER	POWER SUPPLY	MOTOR	AIRFLOW (CFM)	HEIGHT FROM FLOOR(Mtr)	ROTATION (RPM)
ECOPM7E	24 Feet	1PH/ 3PH	1.1 kw	3,78,000	9/11.5	52
ECOPM6E	20 Feet	1PH/ 3PH	1.1 kw	2,88,000	9/11.5	68
ECOPM5E	16 Feet	1PH/ 3PH	0.63 kw	2,25,000	6/7.5	72
ECOPM4E	12 Feet	1PH/ 3PH	0.29 kw	1,30,000	5/6.5	86
ECOPM3E	10 Feet	1PH/ 3PH	0.29 kw	99,000	5/6.5	100
ECOPM2.4E	08 Feet	1PH/ 3PH	0.29 kw	87,000	5/5.5	110

Note: Our Fan is compatible with Single Phase & Three Phase supply. * As Per Standard Test Conditions

Standard Applications

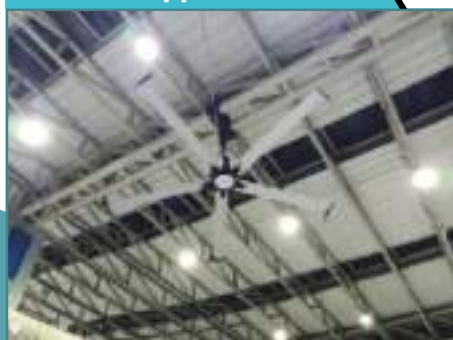

Ecoair PMSM HVLS Fans



Features & Advantages

- PMSM- (Permanent Magnet Synchronous Motor), Brushless Motor with High Torque at Low RPM.
- Exceptionally Low Maintenance- Service interval >1,00,000 Hours, with 24x7 operation at continuously full speed.
- Energy Efficient Motors- 30% Lower Power Consumption, compared to normal HVLS Fans.
- Extremely low sound – No Gearbox, Direct drive less than 50 dB @ 3 mtr
- 5 Blade Al Alloy 6061T6 Aluminum alloy blade - High Strength & Durability
- Primary and Secondary Safety features for Anti Fall Protection for all components of the Fan.

Best Suited For Application

- Continuous Duty Low sound.
- Airports, Railway stations, Warehouse
- Shopping Malls & Cinema House.
- Air Conditioned Building to lower A/c running cost.
- Shop Floors, Factories, Temple
- 24*7 Operation and Low Sound Application

Ecoair PMSM Fan Specifications

MODEL NO.	FAN DIAMETER	POWER SUPPLY	MOTOR	AIRFLOW (CFM)	HEIGHT FROM FLOOR(Mtr)	ROTATION (RPM)
EABPM7E	24 Feet	3ph	1.5 kw	3,78,000	9/11.5	52
EABPM6E	20 Feet	3ph	1.5 kw	2,88,000	9/11.5	65
EABPM5E	16 Feet	3ph	0.85 kw	2,25,000	6/7.5	72
	16 Feet	1ph	0.75 kw	2,25,000	6/7.5	72
EABPM4E	12 Feet	1ph	0.4 kw	1,30,000	5/6.5	86
EABPM3E	10 Feet	1ph	0.4 kw	99,000	5/6.5	100
EABPM2.4E	08 Feet	1ph	0.4 kw	87,000	5/5.5	120

Note: Our Fan is compatible with Single Phase & Three Phase supply. * As Per Standard Test Conditions

Standard Applications



Ecoair Pole Mounted HVLS Fans



Features & Advantages

- High performance fan for indoor & outdoor applications such as lawns, Restaurant etc.
- Single fan replaces multiple wall mounted fan
- Distributes air up to 17,000 Sq.ft., corner to corner, outstanding coverage without draft consuming only 1.5KW power.
- Variable speed controller to set and control airflow.
- reverse operation options.

Best Suited For Application

- Dual Advantage - Can be used both indoor and outdoor
- Resorts, Auditoriums, Wedding Halls, Shopping Malls
- Warehouse, Shop Floor in Factories
- Railway Stations, Bus Stands, Prayer Halls

Ecoair Pole Mounted HVLS Specification

MODEL NO.	FAN DIAMETER	POWER SUPPLY	MOTOR	AIRFLOW (CFM)	WORKING AREA Sq.Ft. APPROX.	ROTATION (RPM)
ECOPM7E	24 Feet	3ph	1.5 kW	3,78,000	16,900	52
ECOPM6E	20 Feet	3ph	1.5 kW	2,88,000	10,500	66
ECOPM5E	16 Feet	3ph	1.1 kW	2,25,000	9,000	72
ECOPM4E	12 Feet	3ph	1.1 kW	1,30,000	6,800	85
ECOPM3E	10 Feet	3ph	0.75 kW	99,000	5,500	110
ECOPM2.4E	8 Feet	3ph	0.75 kW	87,000	4,500	120

All Ecoair Pole Fan HVLS Models are 3 phase, 415 volts, 50Hz

Note: Our Fan is compatible with Three Phase supply. * As Per Standard Test Conditions

Standard Applications



Ecoair BLDC HVLS Fans



Features & Advantages

- BLDC: Brushless DC Motor in Single Phase - Available in 6 ft & 8 Ft
- Very Low maintenance & Low Power Consumption
- 5 Blade High Grade Aluminum Alloy with Primary & Secondary Safety
- Anti fall protection for all components

Best Suited For Application


- Outdoor Stadium under Tensile Roof
- Low Roof Auditoriums, Conference Rooms, Reception Area
- Hospitals, Corporate Offices, Restaurants
- Villas, Resorts, Play Areas, Clubs

Ecoair BLDC HVLS Fans Specification

SR.NO.	MODEL NO.	ECOBLDC1800	ECOBLDC2400
1	Fan Diameter (ft)	6	8
2	Type of fan	BLDC HVLS Fan	BLDC HVLS Fan
3	Protection rating	IP 54	IP 54
4	Blade Material/Finish	High Grade Aluminium Alloy 6063 T6 / Anodised Silver	High Grade Aluminium Alloy 6063 T6 / Anodised Silver
5	No. of Blade (Nos)	5	5
6	Motor Type	BLDC	BLDC
7	Power (kW) / Voltage(V)	0.4 / 1 Phase (220V)	0.5 / 1 Phase (220V)
8	Drive Type	Intelligent Controller	Intelligent Controller
9	Speed(RPM)	210	160
10	Air Flow(cfm)	45000	54000
11	Coverage area in sq.ft	3000	3500
12	Safety Features	1. GI wire rope for blade & extension tube 2. Protection from over current, over voltage & undervoltage, zero derating factor, motor does not heat because our motor body acts as stator.	1. GI wire rope for blade & extension tube 2. Protection from over current, over voltage & undervoltage, zero derating factor, motor does not heat because our motor body acts as stator.

Note: Our Fan is compatible with Single Phase supply. * As Per Standard Test Conditions

Standard Applications

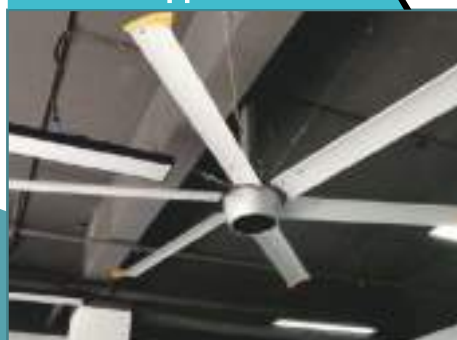

Ecoair FLEX Wall Mounted HVLS Fan



Features & Advantages

- With oscillating head option, wide air flow, covers up to 120 degrees.
- The fan can be easily pivoted for optimum airflow in one direction as well
- Installation and maintenance costs than traditional cooling methods.
- Requires lower investment

Best Suited For Application

- Premises where ceiling mounted HVLS fans not possible too install
- Yu – Go low sound levels makes it suitable where Conventional Wall fans sound levels are not acceptable
- Oscillating features enable large coverage area
- Aerofoil Blades ensure larger Air Flow with extremely low power consumption

Ecoair FLEX Wall Mounted Specification - Model: EcoFlex-5E

SR. NO	PARAMETERS	VALUES
1	Fan Diameter (Ft.)	5
2	Type of fan	Wall Mounted HVLS Fan
3	Fan Adjustment (Vertically)	0-60°
4	Blade Material	Aluminum Alloy 6063 T6
5	Oscillatory Motion	Optional / 0-120°
6	No. of Blades	5
7	Motor Type	Induction Motor
8	Protection Rating	IP 55
9	Power (kW)	1.1
10	Power Inline/ Voltage(V)	3 Phase / 415V / 50 Hz
11	Speed Control	Optional / VFD
12	Speed (RPM)	450
13	Coverage Area in sq.m	252 sq.m max.
14	Air Volume (CMH)	54,000
15	Weight (Kg)	70
16	Noise level (dB)	<75

Note: Our Fan is compatible with Three Phase supply. * As Per Standard Test Conditions

Standard Applications



Ecoair Industrial Evaporative Air Cooler



Ecoair Cooling Advantage

- Comfort cooling upto 20°C with high airflow
- Fresh, Filtered, Cool Air
- Energy saving upto 80%
- Environmental Friendly
- Low Capex
- Dust protection Mesh
- Innovative Design & Engineering
- Humidity controller/ Temperature controller
- Auto Draining & Cleaning/Remote Controller ith multispeeds
- Open Space Cooling
- Factory built modular construction for long life
- Ecoair coolers use original munters celdek pads for best cooling efficiency and long life
- Ecoair coolers are fitted with HW- Made in Italy, 5 Blade, Sickle design fans for max air flow at lowest sound levels.
- Ecoair 3 phase machines have 2 speed control
- Control Panel provides Protection from Over Load, Single Phasing, Voltage Fluctuations etc.
- Factory Built Modular Construction made with Automotive Grade UV Protected Poly Propylene Body

Specifications

MODEL NO.	AIRFLOW(CMH)	MOTOR KW	PHASE	DISCHARGE TYPE
EAC 18	18000	1.1 KW	1Ph/3Ph	TOP / SIDE / BOTTOM
EAC 22	22000	1.5 KW	1Ph/3Ph	TOP / SIDE / BOTTOM
EAC 25	25000	2 KW	3Ph	TOP / SIDE / BOTTOM
EAC 30	30000	3 KW	3Ph	TOP / SIDE / BOTTOM

		HUMIDITY %													
		20 %	25 %	30 %	35 %	40 %	45 %	50 %	55 %	60 %	65 %	70 %	75 %		80 %
INLET AIR TEMPERATURE	31.0° C	18.3° C	18.9° C	20.0° C	21.1° C	21.7° C	22.8° C	23.3° C	24.4° C	25.0° C	26.1° C	26.7° C	27.2° C	27.8° C	OUTLET AIR TEMPERATURE
	32.0° C	19.4° C	20.6° C	21.1° C	22.2° C	23.3° C	23.9° C	25.0° C	25.6° C	26.7° C	27.2° C	28.3° C	28.9° C	29.4° C	
	34.0° C	20.6° C	21.1° C	22.8° C	23.3° C	24.4° C	25.6° C	26.7° C	27.2° C	28.3° C	28.9° C	29.4° C	30.6° C	31.1° C	
	36.0° C	22.2° C	23.3° C	24.4° C	25.6° C	26.7° C	27.8° C	28.9° C	30.0° C	30.6° C	31.7° C	32.2° C	33.3° C	33.9° C	
	37.0° C	22.8° C	23.9° C	25.0° C	26.1° C	27.2° C	28.3° C	29.4° C	30.0° C	31.1° C	31.7° C	32.8° C	33.3° C	34.4° C	
	39.0° C	23.9° C	25.0° C	26.1° C	27.2° C	28.3° C	29.4° C	30.6° C	31.7° C	32.8° C	33.3° C	34.4° C	35.0° C	36.1° C	
	41.0° C	25.0° C	26.1° C	27.8° C	28.9° C	30.0° C	31.1° C	32.2° C	33.3° C	33.9° C	35.0° C	36.1° C	36.7° C	37.8° C	
	42.0° C	26.1° C	27.2° C	28.9° C	30.0° C	31.1° C	32.2° C	33.3° C	34.4° C	35.6° C	36.7° C	37.8° C	38.3° C	38.9° C	
	44.0° C	27.2° C	28.9° C	30.0° C	31.7° C	32.8° C	33.9° C	36.1° C	35.0° C	36.1° C	37.8° C	38.9° C	39.4° C	40.6° C	
45.0° C	28.3° C	30.0° C	31.1° C	32.8° C	33.9° C	35.0° C	36.7° C	37.8° C	38.3° C	39.4° C	40.0° C	41.1° C	42.2° C		
TYPICAL CASE: CENTRAL PLAINS & DRY CONDITIONS		TYPICAL CASE : COASTAL AREA & HUMID CONDITIONS													

Air Cooler System Concept



Standard Applications



Ecoair Exhaust Fan



Features & Advantages

- Direct drive fan without belt for maintenance free operation and long life.
- Double ball bearing & copper winding motor for high efficiency & durability.
- Aluminum die cast Impeller for high strength.
- Large energy savings & air flow with very low noise. Small Capacity motor running at low RPM with large air displacement.
- SS blades & G.I cabinet for long life.
- Built in louvers to prevent dust ingress when fan is switched off.
- Easy installation

Best Suited For Application

- For ventilation and ensuring air changes as per statutory requirements in shop floors, warehouses, assembly lines, garment factories, food processing centers, poultry farms, where large volumes of air need to be exhausted using minimum power consumption.
- Ideal replacement for roof ventilators/ turbo ventilators wherever roof mounted solar systems are installed.
- Used to ventilate non-flammable, low corrosive gases with temp less than 50°C, relative humidity no greater than 80%, quantity of dust & solid impurities 100 mg/m³

Ecoair Exhaust Fan Specifications (Direct Drive)

MODEL NO.	POWER (KW)	VOL/FREQ (V/HZ)	AIRFLOW(CMH)	ROTATION (RPM)	SIZE (MM)		
					L	W	H
EAEX600	0.37	415/50	17,000	700	800	400	800
EAEX800	0.45	415/50	23,000	560	900	400	900
EAEX1000	0.55	415/50	32,000	560	1,060	400	1,060
EAEX1200	0.75	415/50	37,000	460	1,220	400	1,220
EAEX1300	1.1	415/50	44,500	460	1,380	400	1,380

Note: Our Fan is compatible with Three Phase supply. * As Per Standard Test Conditions

Standard Applications



Ecoair Roof Extractor



Features & Advantages

- High air flow capacity, designed using computational fluid dynamics (CFD) analysis.
- Extremely low sound.
- Low power consumption.
- SS blades & high strength body for operating in contaminated environments.
- Specially designed Low RPM motor for Increased life cycle.
- Remote operation options

Best Suited For Application

- Ware houses with large span and no provision for natural ventilation like ridge ventilation .
- Industries with high level of smoke emissions like forge shops , welding & fabrication, pressure die casting, etc.
- Large kitchen ventilation
- Foundry air management
- Machine shops where high levels of mist.

TECHNICAL SPECIFICATIONS - 10,000 CFM

SR.NO	MODEL NO	POWERED ROOF EXTRACTOR
1	Application	Forced Exhaust
2	Fan Diameter (mm)	700 mm
3	Protection rating	Ip55
4	Body M.O.C.	Mild Steel Powder Coated.
5	No. Of Blade(Nos)	6
6	Machine Size	DIA.-750, H-550mm
7	Motor Type	3 Phase Induction Motor
8	Power (kW)	0.37
9	Power line/Voltage(V)	Three phase - 415 V
10	Amp. Load	1.4 A
11	Speed(RPM)	700
12	Speed control Method	Direct Start
13	Insulation Class	F
14	Duty Cycle	S1
15	Air Flow(cfm)	10,000
16	Static Pressure	15 mmW.G.
17	Weight (kg)	60 kg
18	Noise level @3 meter below fan	<65 dB
19	Safety Features	Short Circuit Protection & Grill for anti fall protection

Standard Applications



Ecoair YU-GO Fan



Features & Advantages

- Specially designed for installation on floor
- Sturdy Body With Wheels for Portability
- Distributes air in a large area horizontally
- Low Noise

Best Suited For Application

- Large Factories, Fabrications Shop, Press Shops etc.
- Ship Building Yards, Air Craft Hangars, Railways workshops
- Warehouses, Logistics Centres with High Racks.
- Lawns open party Areas, Terraces, Religious places, Community Centres Etc.

Technical Specification - 6 & 8 Feet


Sr.No.	Model No.	YU GO 6 FT	YU GO 8 FT
1	Type of fan	Portable	Portable
2	Blade Material	Aluminium Alloy 6063 T6	Aluminium Alloy 6061 T6 Grade
3	No. of Blades	6	5
4	Motor Type	PMSM	Induction motor
5	Protection rating	IP 55	IP 55
6	Power (kW)	0.75	1.5KW/3 & 1 Phase
7	Power line/Voltage(V)	Single Phase / 230V	3 Phase 415V / 1 Phase 230V
8	Drive Type	Intelligent Controller	Intelligent Controller
9	Speed(RPM)	300	206
10	Air Volume (CMH)	75000	1,17,000
11	Weight (kg)	130	150
12	Noise level (db)	<70	<60

Standard Applications



Mixed Flow Duct Ventilator

Overall and Installation Dimension

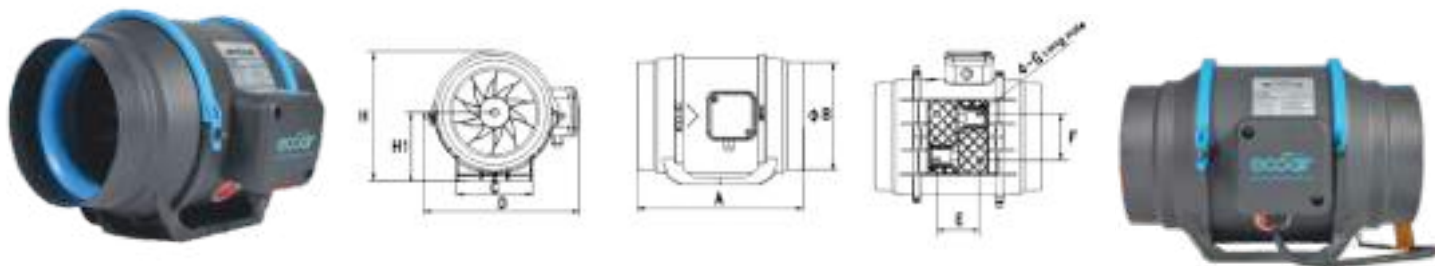

Features & Advantages

- High strength PP plastic, light weight and durable. Double insulation.
- Mixed-flow impeller design, high pressure and large air flow, high efficient, low noise.
- Special snap joints design, easy installation, perfect seal conditions, easy maintenance.

Best Suited For Application

- Bathroom exhaust
- Whole house ventilation
- Duct boosting
- General kitchen exhaust
- Laundry room exhaust
- HRV / ERV boosting

Overall and Installation Dimension

MODEL NO.	A	Φ B	C	D	E	F	G Long Hole	H	H1
EMFF100	300	Φ100	100	214	62	60	7X5	182	95
EMFF150	293	Φ150	120	237	72	70	7X5	211	110
EMFF200	304	Φ200	140	258	78	85	8X6	235	124
EMFF250	383	Φ250	180	298	119	92	11X8	291	152
EMFF315	413	Φ315	220	364	127	140	11X8	359	189

Performance Table (Volatage 220V-240V/Frequency 50/60Hz)

MODEL NO.	POWER(W)	AIR VOLUME (m³/h)	STATIC PRESSURE (Pa)	SOUND LEVEL(dB)	DUCT SIZE Φ(mm)	NET WEIGHT (KG)	APPLICABLE AREA (m²)
EMFF100	28/25	200/150	180/130	30/25	100/125	1.8	8-16
EMFF150	50/40	500/400	300/250	35/30	150/160	2.2	18-36
EMFF200	70/60	850/700	350/280	50/45	200	3.1	34-76
EMFF250	170/130	1500/1100	550/400	60/54	250	7.0	42-84
EMFF315	320/230	2300/1800	700/500	66/61	315	9.7	60-120

Standard Applications



Ceiling Mounted Exhaust Fan(Duct Type)



Features & Advantages

- Better airflow efficiency
- Pure copper motor
- Quiet operation
- Low power consumption
- Low noise
- Light weight and durable

Best Suited For Application

- Ceiling fans have a broad range of applications that include residential spaces as well as commercial spaces like offices, clinics, centers, and others.
- Larger spaces like auditoriums, halls, and warehouses also incorporate a ceiling fan, not one but many; however, ceiling fans with long rods are preferred due to the tall ceilings. These fans work very well in industrial areas too.

Performance Table

TYPE	MODEL NO.	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	VOLUME (m³/h)	STATIC PRESSURE (Pa)	NOISE (dB)	DUCT SIZE ϕ (mm)	APPLICABLE AREA (m²)	NET WEIGHT (kg)
Semimetal Series	ECME 10-21J	220~240	50/60	25	150	100	33	100	6~12	2.8
	ECME 10-24JL	220~240	50/60	30	200	110	35	100	8~16	3.2
	ECME 10-24JH	220~240	50/60	35	250	120	39	100	10~20	3.2
	ECME 15-27JL	220~240	50/60	45	300	120	33	150	12~24	4.2
	ECME 15-27JH	220~240	50/60	48	400	150	37	150	15~30	4.2
	ECME 15-32J	220~240	50/60	55/50	550/450	150/120	42/37	150	18~44	5.6
Plastic Series	ECME 10-21S	220~240	50/60	25	150	100	33	100	6~12	1.7
	ECME 10-24SL	220~240	50/60	30	200	110	35	100	8~16	1.9
	ECME 10-24SH	220~240	50/60	35	250	120	39	100	10~20	1.9
	ECME 15-27SL	220~240	50/60	45	300	120	33	150	12~24	2.5
	ECME 15-27SH	220~240	50/60	48	400	150	37	150	15~30	2.5
	ECME 15-32S	220~240	50/60	55/50	550/450	150/120	42/37	150	18~44	3.5

Standard Applications



Ecoair Air Circulator / Grid Fan



Specifications

Ceiling fan with Auto-on function	88*20MM Copper Motor
Voltage - 220-240V	3 ABS Blade
Power - 65W+-5%	3 Speed
CMH - 3200	With remote control

Features & Advantages

- Specially designed for installation in false ceilings
- Fixed into a Std. 2'X2' ceiling grid & extremely easy to install.
- Revolving Louver distributes air in a large area.
- Double ball bearing & copper winding for extremely long life & durability.

Best Suited For Application

- Air Conditioned Rooms specifically where Hot pockets arise and Air Conditioning is in-effective
- Reduction in Air Conditioning Load as the Air Flow from the fan creates "Wind Chill Effect" giving improved comfort cooling.
- In low ceiling height application area where conventional ceiling fans cannot be installed.

Standard Applications



Our Clients



ecoair®

Ecoair Cooling Systems Pvt. Ltd

Address : Plot No - A-21/5, Chakan MIDC Phase II Opp Flash Forging, Near SKS Fasteners Ltd.
(Unit - III HP Chowk, Tal Khed, Khalumbre, Pune, Maharashtra 410501)

North: 7757020173/ 7757085495 Email: rm.north@ecoair.co.in
Gujarat : 8956362722 / 7758015644 Email : rm.central@ecoair.co.in
Central + East : 7410041212 / 8956676962 / 7757997465 Email: manager.marketing@ecoair.co.in
South : 9175946203 / 8956362721 Email : sales@ecoair.co.in
West : 8956759643 / 7755910401 / 7420050052 / 9730426669 / 8956683914 Email : rm.west@ecoair.co.in
Export : +91 7757085306 / 9096141116 / 7758010953 Email : exports.head@ecoair.co.in
Website : www.ecoair.co.in

Authorised Dealer