



EURO VISTA FOLD™

THERMALLY BROKEN ALUMINUM FOLDING DOORS



Florida Building Code Approved
Product Approval FL 27023

www.euro-wall.com
888.989.EURO (3876)

euro-wall®



FOLDING



SLIDING



STACKING



PIVOT

SYSTEM THRESHOLDS

Maximum / Minimum Specifications

Max Panel Weight:	350 lbs each panel
Min Panel Width:	18"
Max Panel Width:	52"
Min Panel Height:	32"
Max Panel Height:	144"
Panel Thickness:	2-1/4"
Max # of Panels:	Unlimited

NOTE: When using maximum panel widths & heights, panels may exceed maximum panel weight of 350 lbs. Calculated weight check should be done. For installations in Florida, please see the Florida Product Approval for usage and limitations.

SYSTEM HIGHLIGHTS

Extrusions

Extruded aluminum 6063-T5 with door panel corner keys for strength and security

Hardware

Stainless steel (316/304SS) components with aluminum hinges

Twinpoint Hardware

Stainless steel (304SS) and aluminum components

Lever Lock Sets

3 hooks + top & bottom shootbolts = 5 point locking system

Multi-point Door Locks

Faceplate, latch and hooks are 304SS

Sills

Standard, modified standard, ADA and channel options

Matching Fixed Units

Matching custom transom and sidelight units available

Thermally Broken

Prevent the conductive thermal energy loss from interior and exterior environments

Configuration

Straight, segmented or radius

Corner Units

90° postless corner units

Largest Panel Sizes

12' tall panel heights / 52" panel widths available - the largest in the industry

Long Lasting Finish


Standard finish coating is AAMA 2605, the highest quality finish available

Aesthetics




Custom muntins, simulated divided lites and mid-rails




SYSTEM COMPONENTS

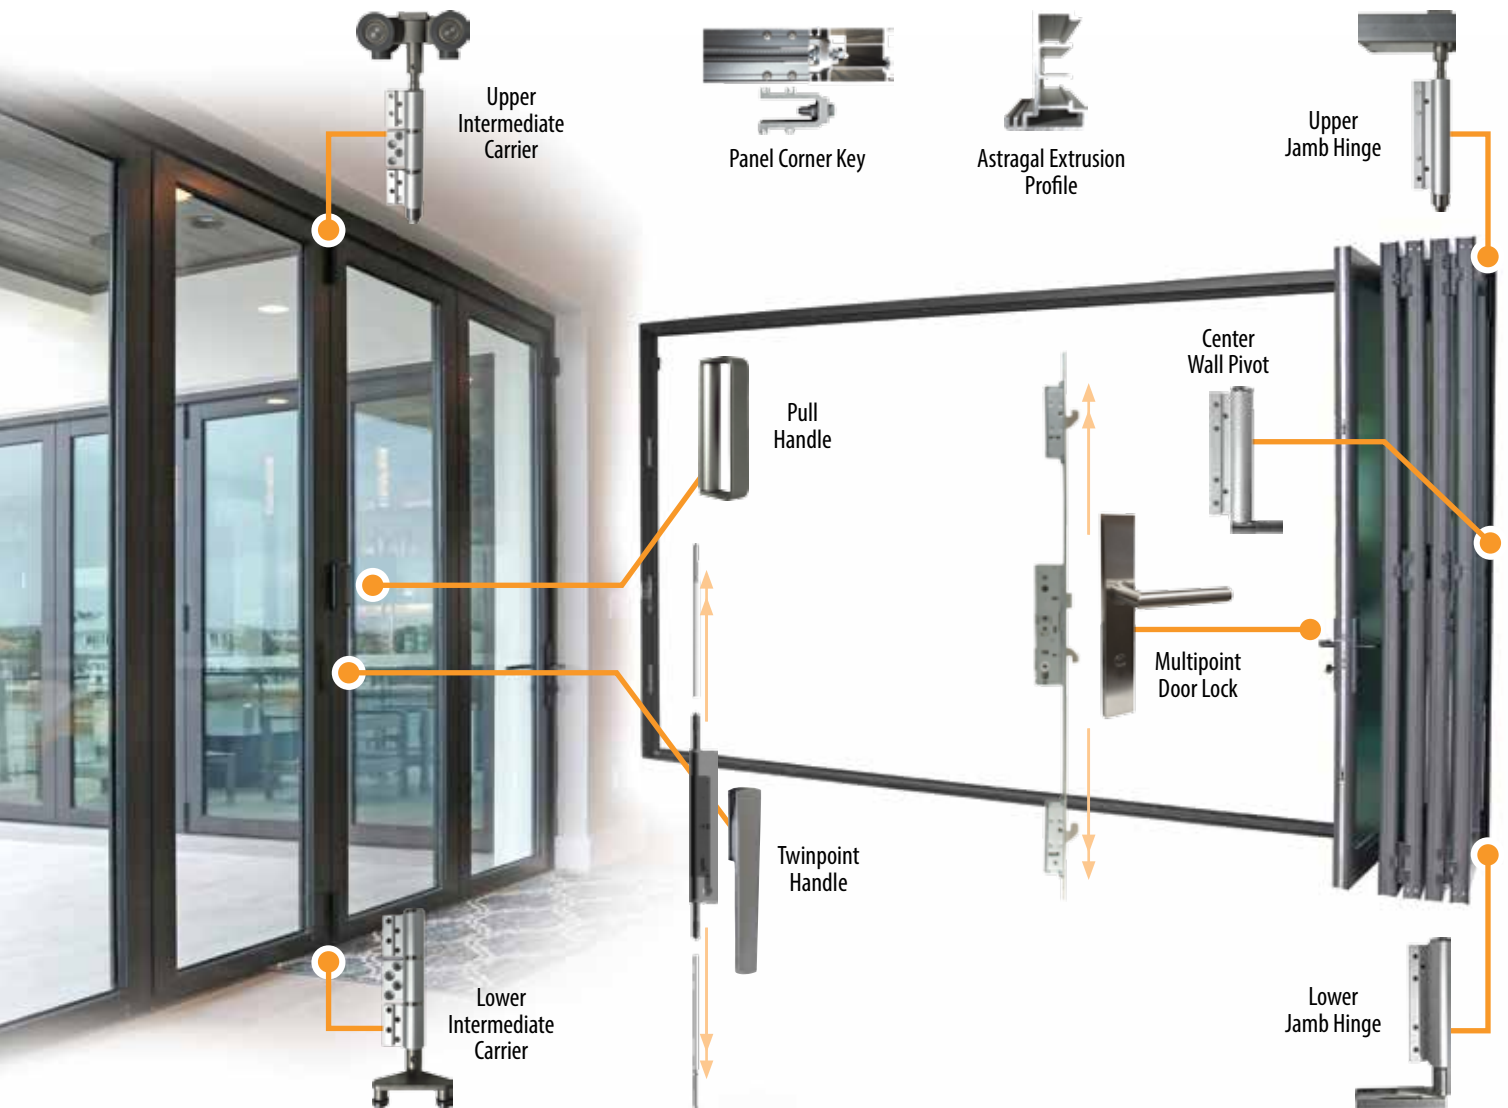

SILL OPTIONS

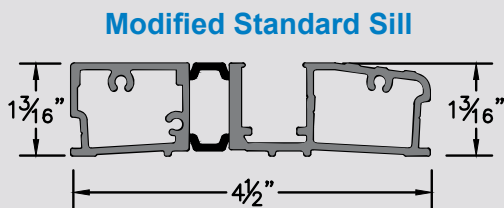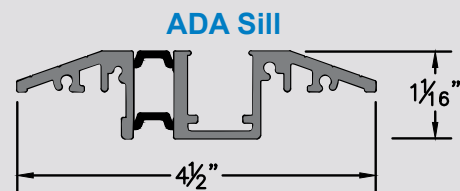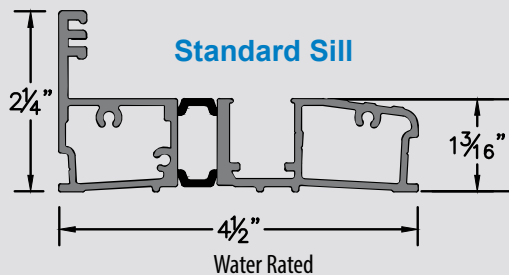


Channel Sill
Interior Application Only



PANEL FINISH OPTIONS

STANDARD FRAME & DOOR PANEL FINISHES



White



Clear Anodized



Bronze



Black

STANDARD FRAME & DOOR PANEL FINISHES

- Anodized, powder coat or Kynar® finishes available
- Custom powder coat or Kynar® finishes available
- Manufacturer color match options
- Custom wood grain finishes available

INTERIOR WOOD CLAD FINISH OPTION

- Douglas fir
- Mahogany / sapele
- White oak
- Additional wood species available



HARDWARE / HANDLE FINISH OPTIONS

MULTIPOINT LOCK HANDLE



Available Finishes

Polished Stainless Steel
Brushed Satin
Bronze
Black


TWINPOINT



Available Finishes

White
Brushed Satin
Bronze
Black
Custom Colors Available

HINGES / HARDWARE

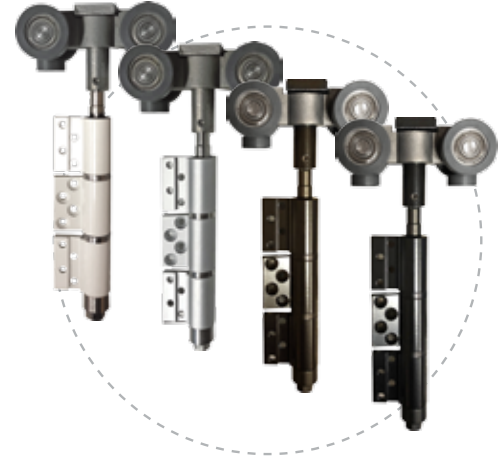

Available Finishes

White
Brushed Satin
Bronze
Black

NOTE: The colors shown in this brochure give only an approximation of color and finish. Actual colors and finishes may vary.



SUPERIOR BY DESIGN

FOLDING CONFIGURATIONS

CODE		OPENING CONFIGURATION	
2L		2R	
2L1R		1L2R	
3L		3R	
3L1R		1L3R	
4L		2L2R	
4L1R			
3L2R		<p>NOTE: The configurations on this page are just a few examples of the numerous possibilities for Euro Vista Fold™ Door layout options.</p>	
5L			
3L3R			
7L		<p>4L 3L </p> <p>Twinpoint Twinpoint Twinpoint Multipoint & Lever Lock Set</p> <p>Twinpoint assembly is used in securing each pair of folding door panels in the closed position.</p>	
4L3R			
5L2R			
5L5R			
5L7R			
5L9R			
5L11R			

PANEL CROSS SECTION

Outswing Extrusion Shown

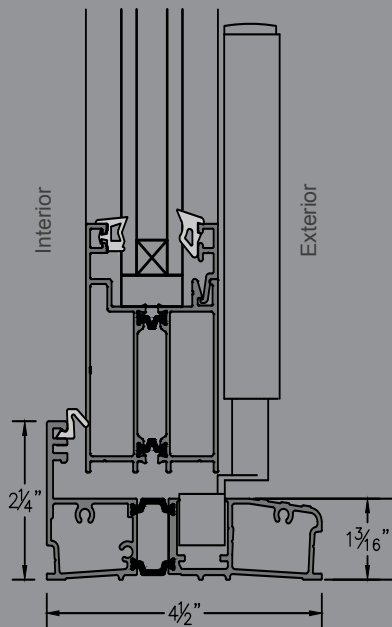
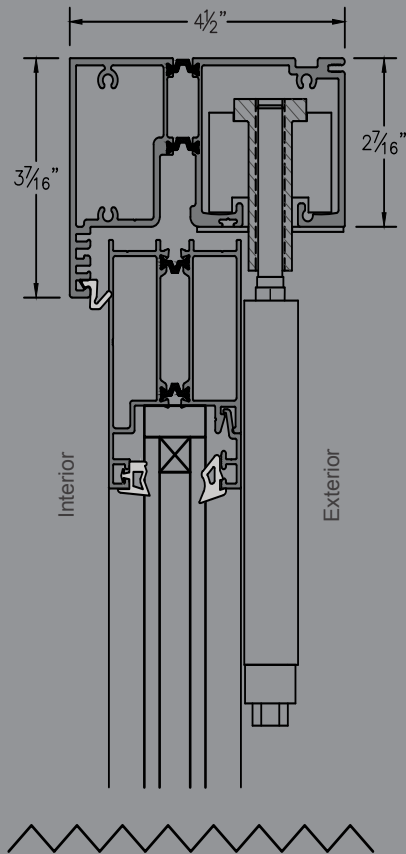


Standard Sill Shown



GLAZING DETAILS

Available glass options for the Euro Vista Fold™ Thermally Broken Folding Door System are detailed below.

Impact Insulated Glass

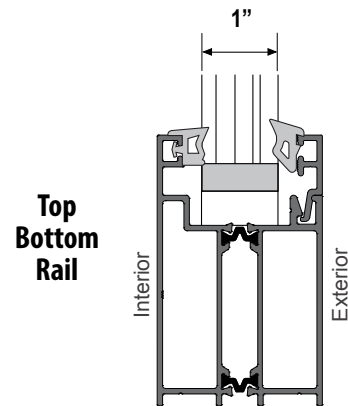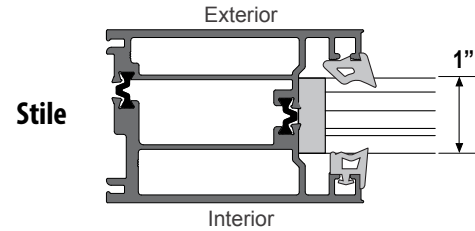

Insulated Glass

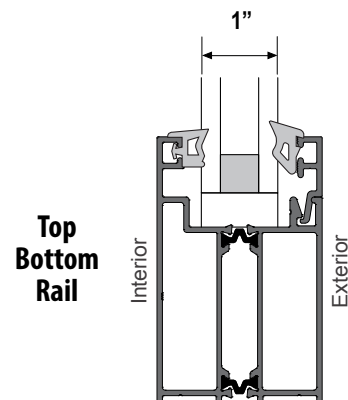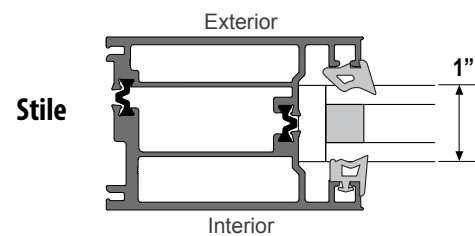

TEST PERFORMANCES

—□ California Title 24 Compliant

—□ Water Leakage Resistance: DP50

—□ ASTM 283-4 / ASTM 547-00 /
ASTM330-02 / AAMA 1304

—□ Wind Load Resistance: DP50


—□ Air Infiltration: A2

—□ Tested for Thermal Requirements


CONFIGURATION SAMPLES



RADIUS

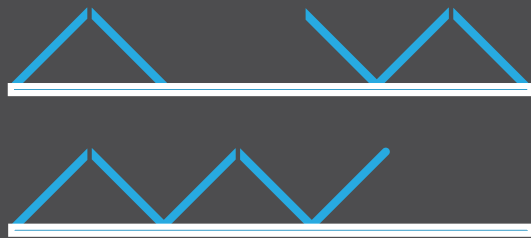

STRAIGHT

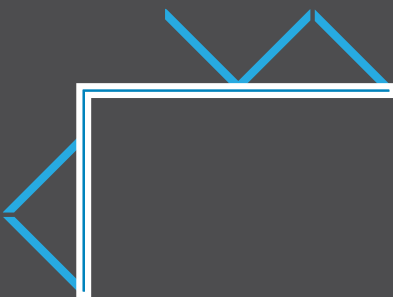

SEGMENTED





EURO-WALL 10 YEAR WARRANTY

Euro-Wall warrants the products to be free from manufacturing defects for a period of 10 years from the date of purchase.

888.989.EURO (3876)
www.euro-wall.com

MANUFACTURING

2200 Murphy Court
North Port, Florida 34289
888.989.3876 • 941.979.5316

euro-wall®

FOLDING | SLIDING | STACKING

SHOWROOM

1211 Stirling Road, Unit 102,
Dania Beach, Florida 33004
954.610.2572


Proud Member of the American Architectural Manufacturers Association.



euro-wall®

FOLDING | SLIDING | STACKING

FOLDING DOOR PANEL MAXIMUM WIDTH / HEIGHT CHART*

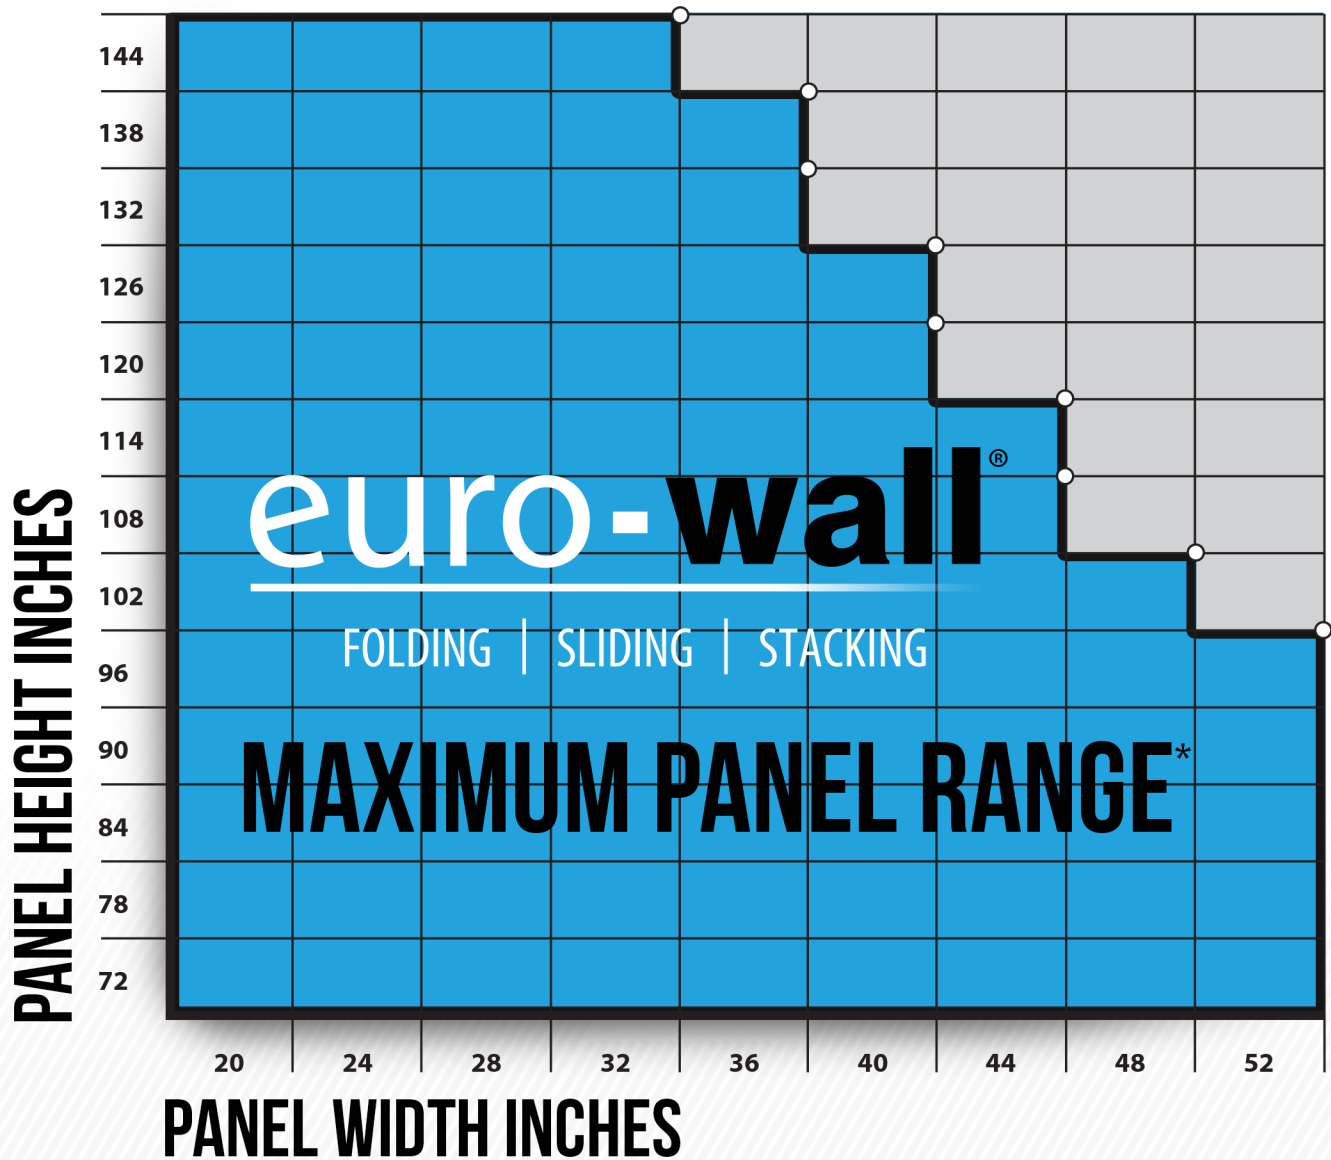

APPLIES TO BOTH INSWING AND OUTSWING CONFIGURATIONS, SEGMENTED AND RADIUS INSTALLATIONS.

SUPERIOR BY DESIGN

Whether a residential or commercial application, Euro-Wall's Florida Product Approved* folding door systems have taller and wider openings, higher design pressures, stronger panels and more glass and door options than our competitors. This versatility has made Euro-Wall a primary choice for architects, builders and homeowners when choosing folding, sliding and stacking door systems for large openings.

Nanawall®, LaCantina Doors®, Solar Innovations® and Origin Doors and Windows® are Registered Trademarks and are not affiliated with Euro-Wall Systems, LLC.





*Panel Comparison Chart is Based on a Florida Product Approval HVHZ Impact Rated Folding Door.

Euro-Wall Products are Designed and Manufactured by Euro-Wall Employees in Florida, U.S.A.

euro-wall®



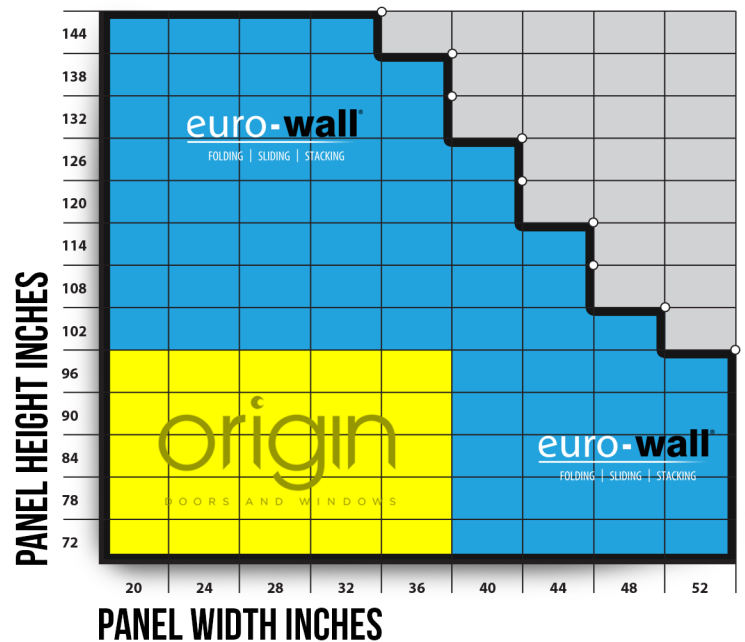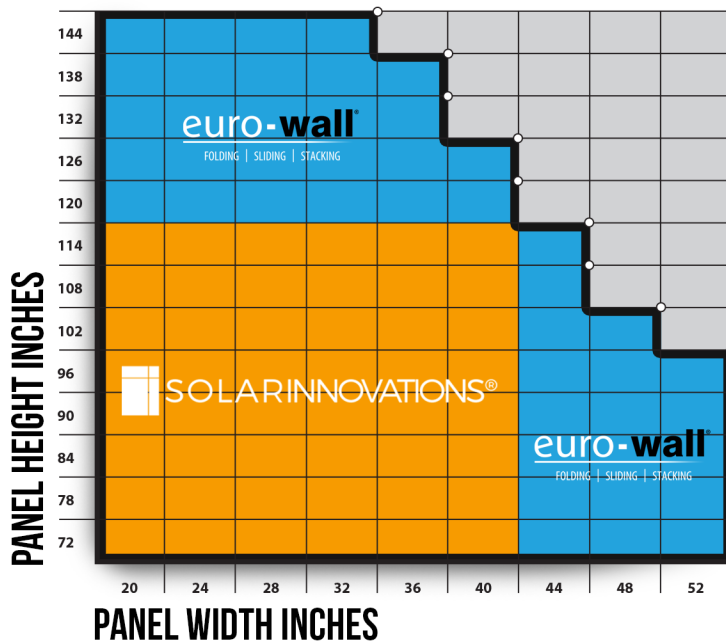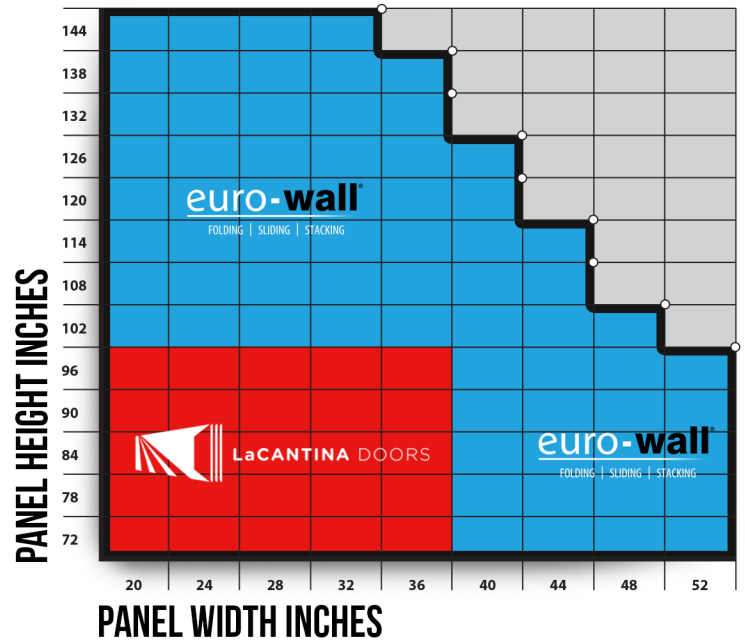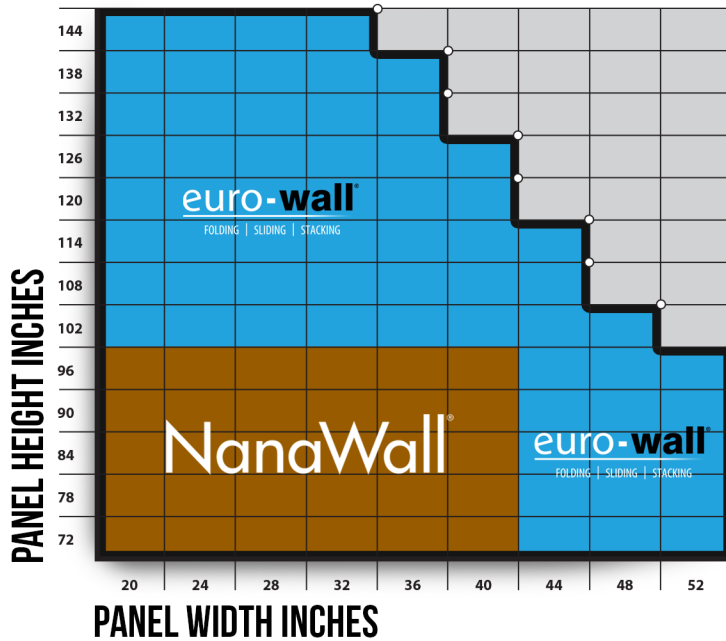

FOLDING | SLIDING | STACKING

FOLDING DOOR PANEL MAXIMUM WIDTH / HEIGHT CHART*



Nanawall®, LaCantina Doors®, Solar Innovations® and Origin Doors and Windows® are Registered Trademarks and are not affiliated with Euro-Wall Systems, LLC.
*Panel Comparison Chart is Based on a Florida Product Approval HVHZ Impact Rated Folding Door.

Euro-Wall Systems Vista Fold™ Product Comparison

	 FOLDING SLIDING STACKING	 Opening Glass Walls that Perform When Closed	 SOLAR INNOVATIONS	 LaCANTINA DOORS
12' Tall Folding Doors - HVHZ Impact Tested - Florida Product Approved	✓	✗	✗	✗
Up to 100+/- DP Impact Tested	✓	✗	✗	✗
ADA Sill HVHZ Impact Tested	✓	✓	✗	✗
Widest Door Opening HVHZ Impact Tested	✓	✗	✗	✗
AAMA 2605 Coatings (Standard)	✓	✗	✗	✗
12' Tall Radius Folding Impact Approved	✓	✗	✗	✗
Matching Structural Transom & Sidelight HVHZ Impact Approved	✓	✗	✗	✗
Manufactured in Florida	✓	✗	✗	✗
Standard 10 Year Warranty (Includes Coatings)	✓	✗	✗	✗
Factory Install Nationwide	✓	✗	✗	✗
Largest Thermally Broken Panel Tested (42' x 120")	✓	✗	✗	✗
12' Tall 90 Degree Florida Impact	✓	✗	✗	✗

