



EURO VISTA SLIDE™

IMPACT RATED LIFT & SLIDE SLIDING DOORS




Approved for use in Miami-Dade HVHZ Zones
Florida Building Code Approved
[Product Approval FL 17999](#)

www.euro-wall.com
888.989.EURO (3876)

euro-wall®



FOLDING



SLIDING



STACKING



PIVOT

SYSTEM THRESHOLDS

Maximum / Minimum Specifications

Max Panel Weight:	500 lbs each panel
Min Panel Width:	24"
Max Panel Width:	96"
Min Panel Height:	32"
Max Panel Height:	166"
Panel Thickness:	1.75"
Max # of Panels:	8

NOTE: When using maximum panel widths & heights, panels may exceed maximum panel weight of 500 lbs. Calculated weight check should be done. For installations in Florida, please see the Florida Product Approval for usage and limitations.

SYSTEM HIGHLIGHTS

Extrusions

Extruded aluminum 6063-T5 with door panel corner keys for strength and security

Hardware

Stainless steel, steel components with corrosion resistant material - salt spray tested 500 hours

Flush or Low Profile Sill

Flush track with finished floor height or 3/8" exposed track - no sill riser required for water rating

Hidden Pockets

Pocket configuration option allows panels to slide into the wall, completely disappearing from view

U Factor

Lowest U factor for any available impact rated lift and slide panel

Track Options

2 track - 5 track options for flexible panel configurations

Matching Fixed Units

To match profile and glass

Largest Impact Rated Panel Sizes

Thermal and non-thermal 13'+ tall panels - the tallest HVHZ impact tested and Florida Product Approved lift and slide panels available

Thermally Broken Option

Impact rated thermally broken panel option - the largest impact tested thermally broken panels available

Aesthetics

Wood cladding option available

Corner Units

90° postless corner units (all impact tested / Florida Product Approved)

Long Lasting Finish

Standard finish coating is AAMA 2605, the highest quality finish available


Under Pressure

Up to 15 lbs of water protection without sill riser

Unhindered View





Highest glass to frame ratio available

SYSTEM COMPONENTS

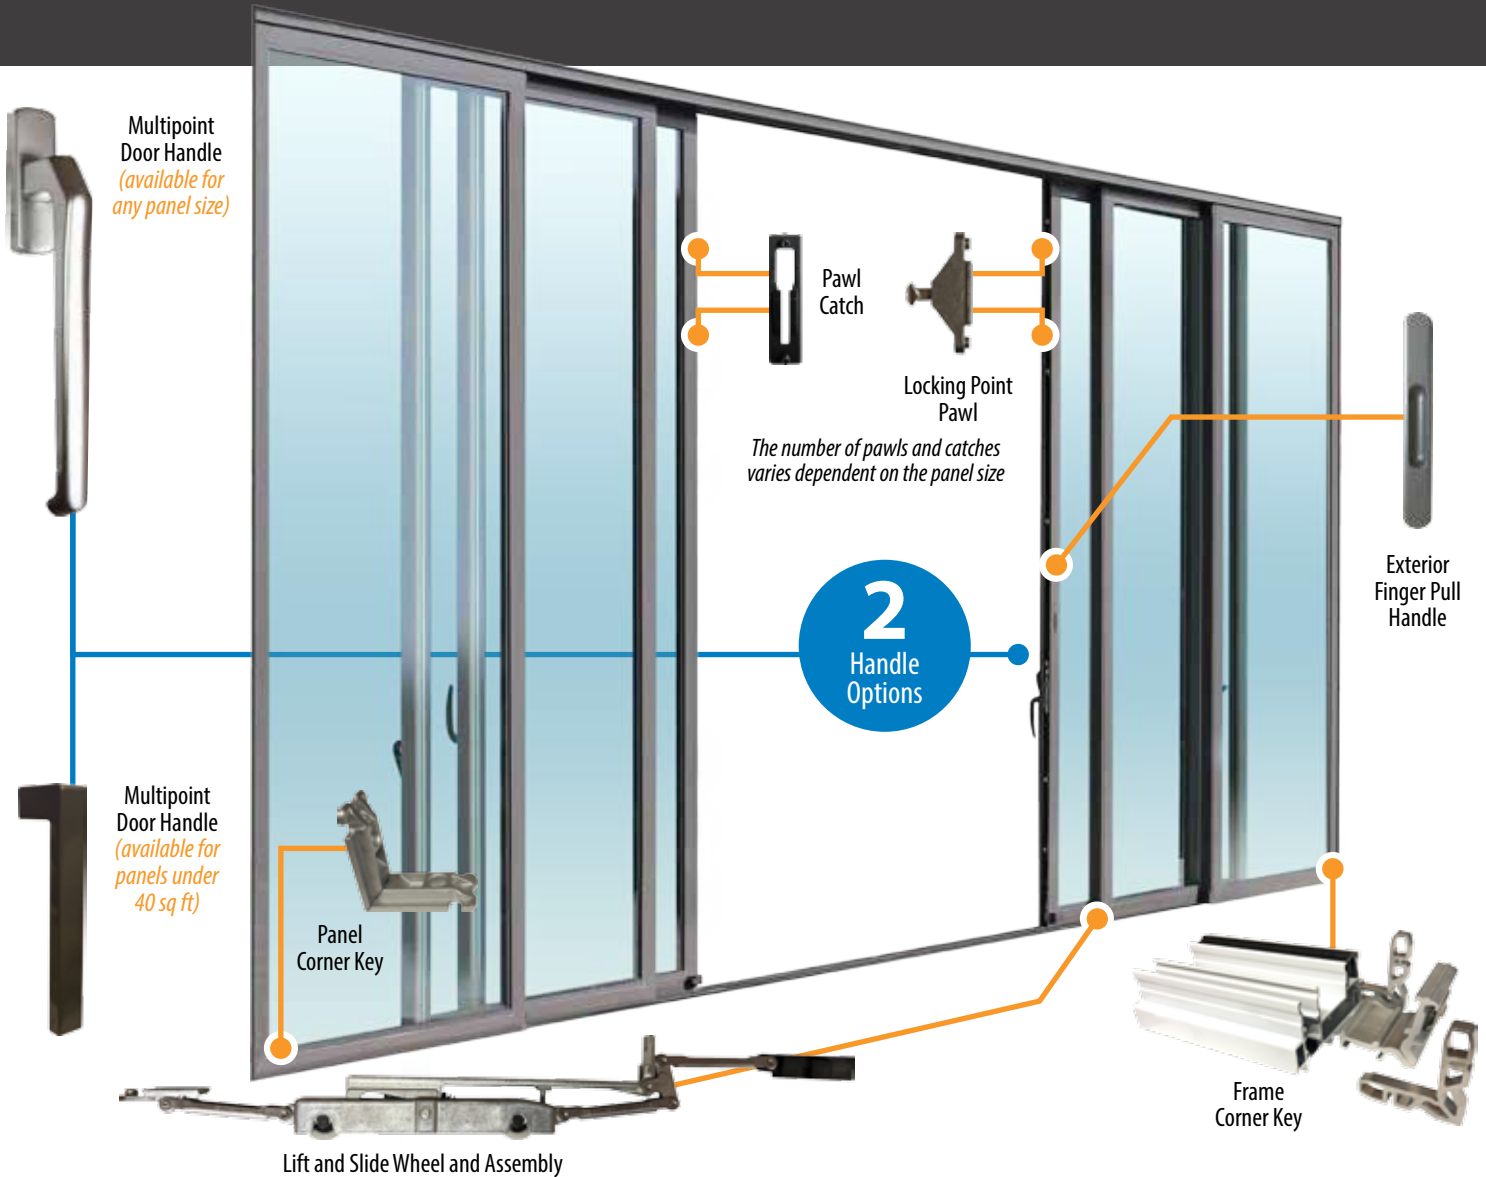


TRACK OPTIONS

The Euro Vista Slide comes in a 2 track, 3 track, 4 track or 5 track configuration.

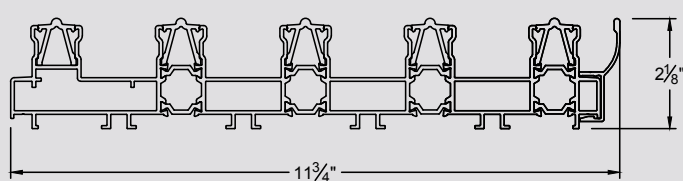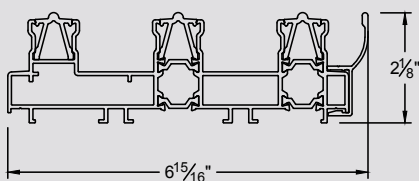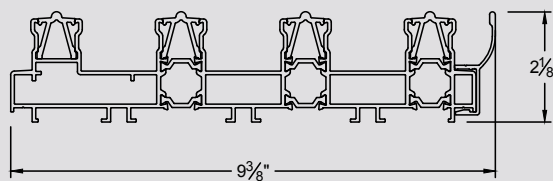

PANEL FINISH OPTIONS

STANDARD FRAME & DOOR PANEL FINISHES



White



Clear Anodized



Bronze



Black

STANDARD FRAME & DOOR PANEL FINISHES

- Anodized, powder coat or Kynar® finishes available
- Custom powder coat or Kynar® finishes available
- Manufacturer color match options
- Custom wood grain finishes available

INTERIOR WOOD CLAD FINISH OPTION

- Douglas fir
- Mahogany / sapele
- White oak
- Additional wood species available



HARDWARE / HANDLE FINISH OPTIONS

MULTIPOINT LOCK HANDLE



AVAILABLE
FOR PANELS
UNDER
40 SQ. FT

Available Finishes

Silver
White
Bronze
Black

Custom Colors Available

MULTIPOINT LOCK HANDLE



AVAILABLE
FOR ANY
PANEL SIZE

Available Finishes

Brushed Satin
Bronze
White

Custom Colors Available

SILL / TRACK



Available Finishes

Clear Anodized
White
Bronze
Black

Custom Colors Available

GLAZING OPTIONS


Available glass for the Euro Vista Slide are:

- Insulated Glass
- Impact Insulated Glass

SUPERIOR BY DESIGN

CONFIGURATION SAMPLES


O = FIXED PANEL X = ACTIVE PANEL

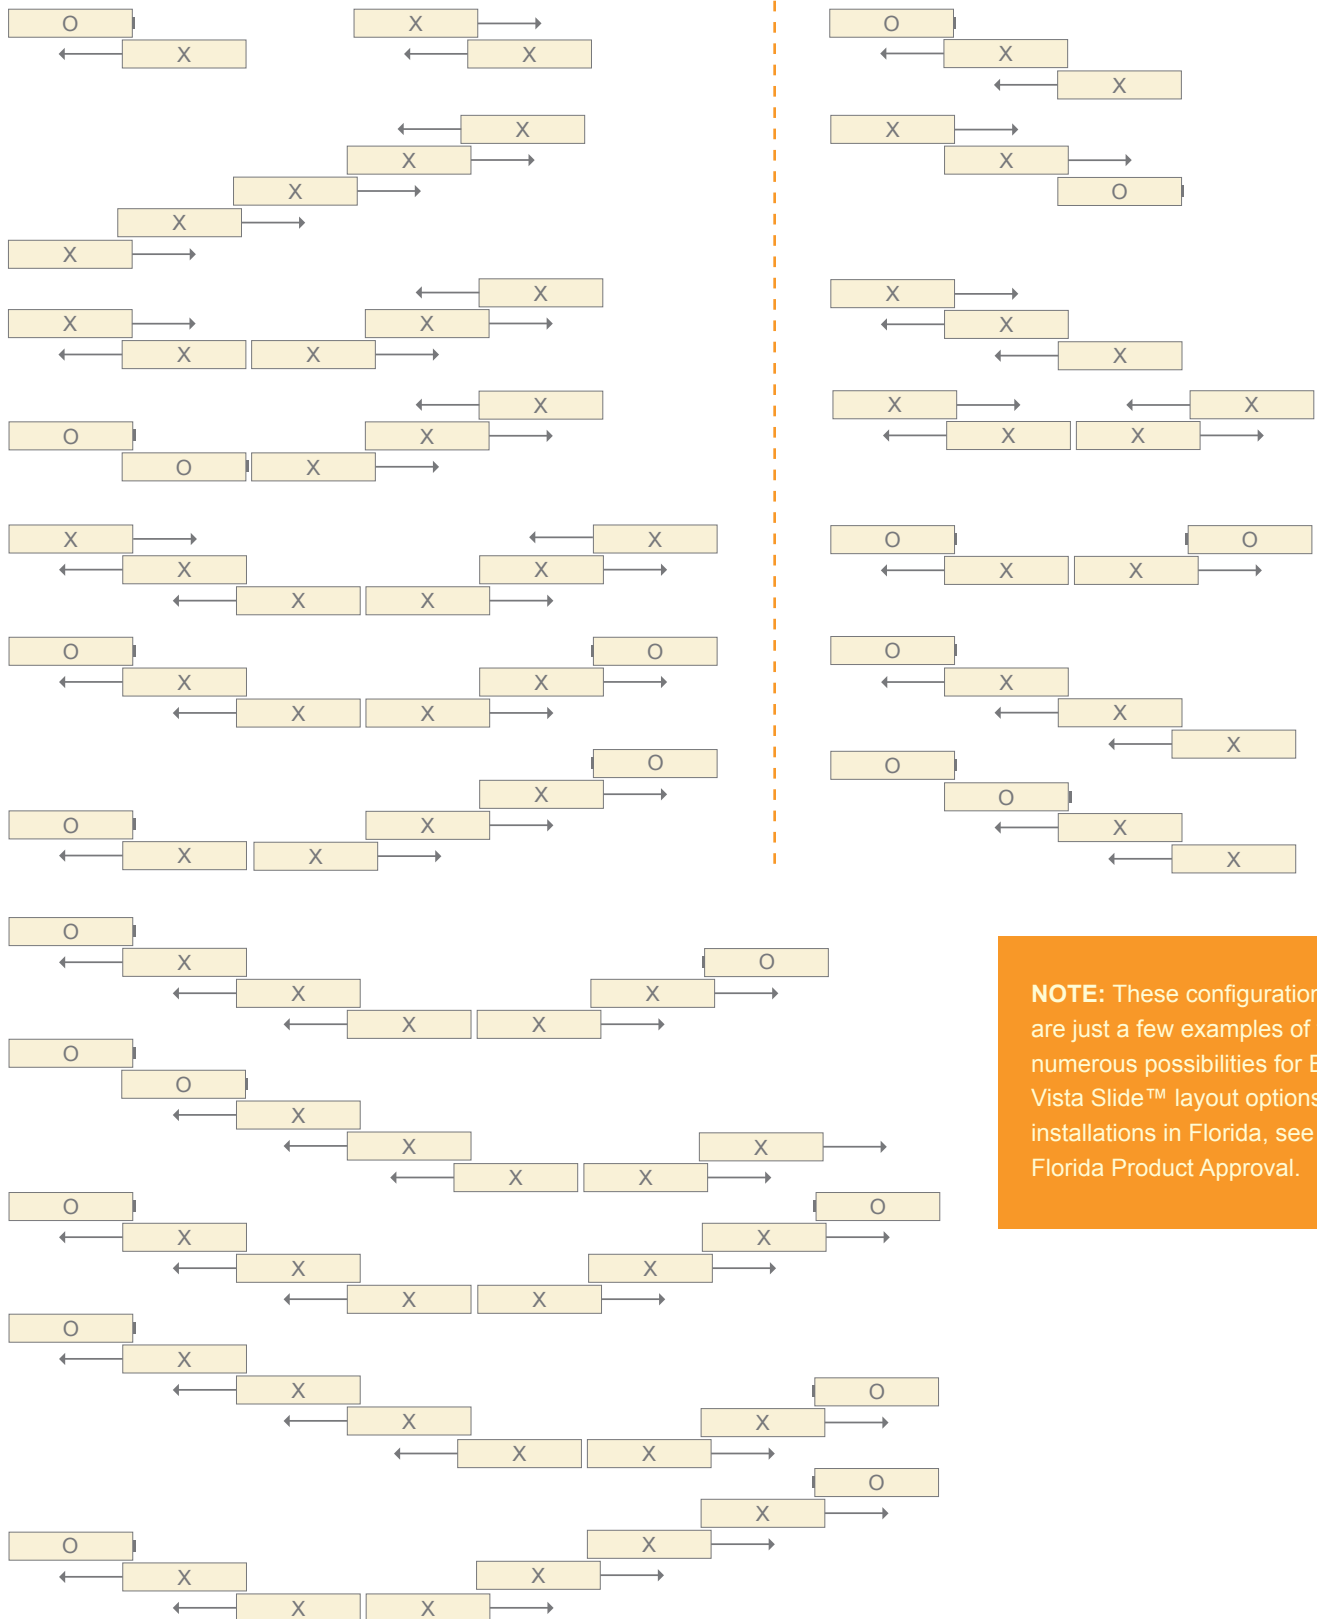

NOTE: These configurations are just a few examples of the numerous possibilities for Euro Vista Slide™ layout options. For installations in Florida, see the Florida Product Approval.


EURO VISTA SLIDE™ SILL PROFILE DETAILS

**Hidden Track System
Split View**

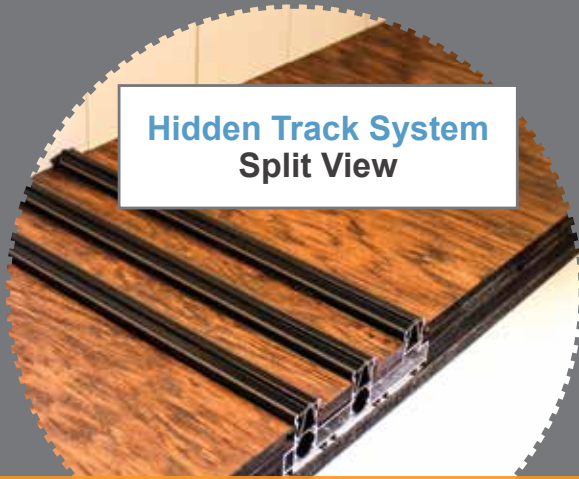

For weather challenged climates, the flush and low profile hidden track systems are manufactured to meet water rating specifications. Additionally, Euro-Wall EXCLUSIVELY manufactures a water rated hidden flush sill.

NON-THERMALLY BROKEN & THERMALLY BROKEN PANEL OPTIONS

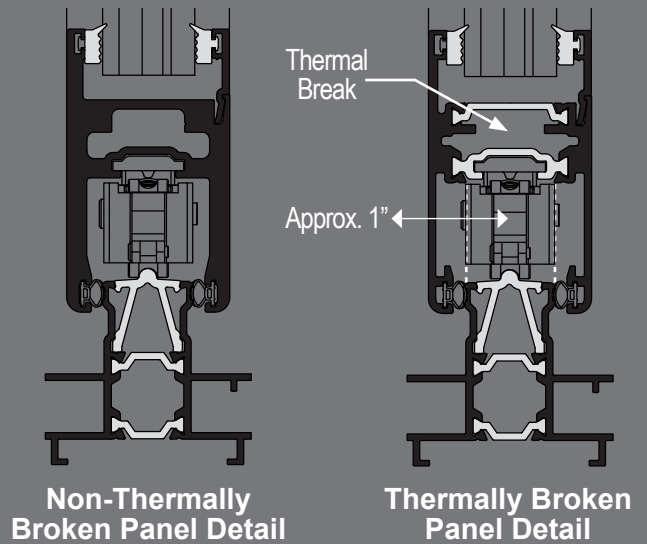


FLUSH SILL

**Hidden Track System
Cross Section**




Finish Floor

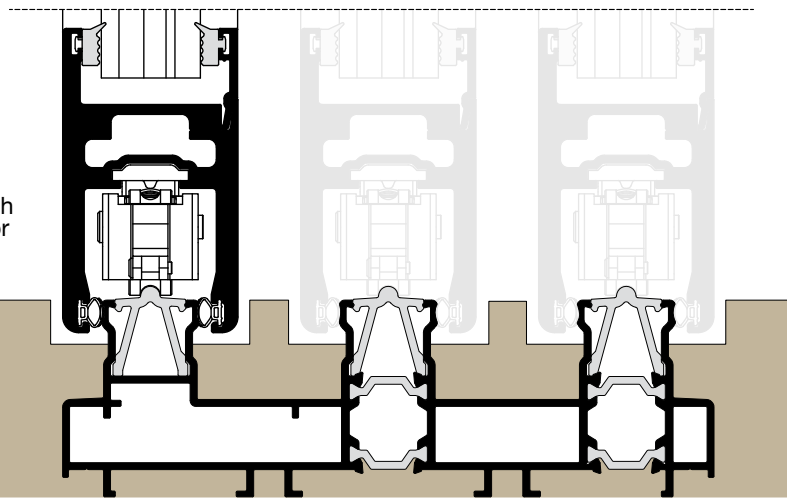


LOW PROFILE SILL

**Hidden Track System
Cross Section**

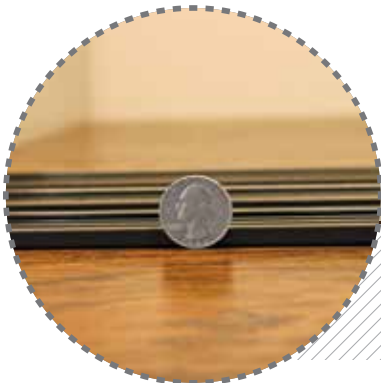

Finish Floor

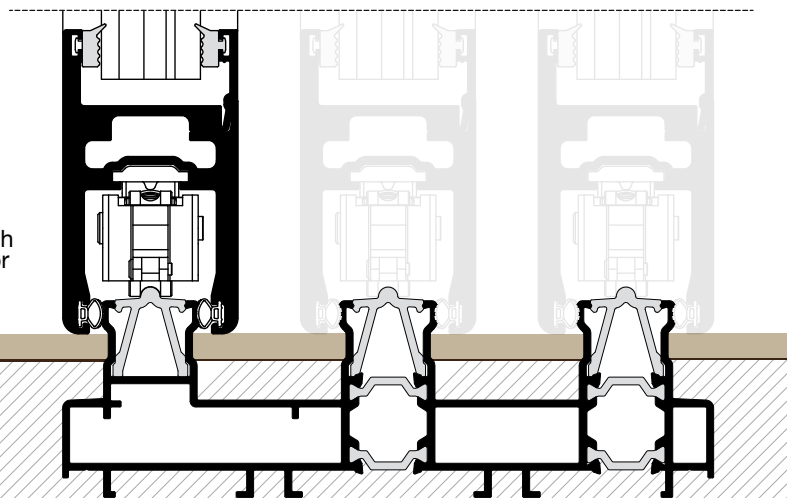

TEST PERFORMANCES

- Approved for use in Miami-Dade HVHZ Zone
- Florida Building Code Approved
Product Approval FL 17999
- California Title 24 Compliant
- AAMA 440 - PASS
- ASTM 330 - PASS
- NAFS - 08 - PASS
- WDMA/CSA101 - PASS
- Up to DP75
- Tested for use in Florida
- Impact 1886 & 1996
- TAS 201, 202, 203 (Miami Dade)
- NFRC Tested for Thermal Requirements

DESIGN PRESSURE CHART

	30	32	36	40	44	48	50	56	60	66	72
72	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	60.0	60.0
78	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	60.0	60.0	60.0
84	75.0	75.0	75.0	75.0	75.0	75.0	75.0	60.0	60.0	60.0	60.0
90	75.0	75.0	75.0	75.0	75.0	75.0	75.0	60.0	60.0	60.0	60.0
96	75.0	75.0	75.0	75.0	75.0	60.0	60.0	60.0	60.0	60.0	60.0
102	75.0	75.0	74.6	67.9	62.6	60.0	60.0	60.0	60.0	60.0	
108	69.9	65.8	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	
114	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0		
120	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0		
126	60.0	60.0	60.0	60.0	60.0	59.2	57.1	51.8			
132	60.0	59.5	60.0	57.7	52.9	48.9	47.1				
138	60.0	59.5	53.2	48.2	44.1	40.7	39.3				
144	53.3	50.1	44.8	40.5	37.1	34.2	33.0				
150	45.2	42.5	37.9	34.3	31.4	29.0					
156	38.6	36.3	32.4	29.3	26.8						
162	33.2	31.1	27.8	25.1	23.0						



EURO-WALL 10 YEAR WARRANTY

Euro-Wall warrants the products to be free from manufacturing defects for a period of 10 years from the date of purchase.

888.989.EURO (3876)
www.euro-wall.com

MANUFACTURING

2200 Murphy Court
North Port, Florida 34289
888.989.3876 • 941.979.5316

euro-wall®

FOLDING | SLIDING | STACKING

SHOWROOM

1211 Stirling Road, Unit 102,
Dania Beach, Florida 33004
954.610.2572

Proud Member of the American Architectural Manufacturers Association.



Euro-Wall Vista Slide™ Impact Rated Lift and Slide

	 FOLDING SLIDING STACKING			
Thermally Broken Aluminum Impact Rated Lift and Slide				
Lowest U Factor Impact Rated				
Genuine Wood Interior Clad with Thermal Break				
Up to 15 lbs of Water Protection W/O Riser				
AAMA 2605 Kynar Coating (Standard)				
Thinnest Aluminum Profiles				
Highest Glass to Frame Ratio				
Replaceable Snaptrac®				
Standard 10 Year Warranty (2605 AAMA Coatings)				
Factory Install Available				
Largest Thermally Broken Panel Impact Tested				

euro-wall®

FOLDING | SLIDING | STACKING | PIVOT

Euro-Vista Slide

- 2 Track
- 3 Track
- 4 Track
- 5 Track

