

Kleiss MCS15-1824 System

Kleiss Gastool®

Stainless Steel Saddle Fitting Specifications

PART NUMBERS / FITTING DETAILS

Part Number	Nominal CI Pipe Diameter	Pipe Range	T-Pipe Flanged Outlet	Length (L)
90001031	18"	19.48" - 20.28"	6" 150#	27.56"
90001032	20"	21.65" - 22.44"	6" 150#	27.56"
90001034	20"	21.26" - 22.04"	6" 150#	27.56"
90001039	24"	25.39" - 25.98"	6" 150#	27.56"
90001033	24"	25.99" - 26.77"	6" 150#	27.56"

** Additional sizes available **

Bolt Connections: According to ISO4017A2 / DIN933A2 / DIN6334A2 / DIN6334A2

Bolt Torque Specification: 89 lb-ft

T-Pipe Outlet: According to ANSI 16.5

Fitting Material: AISI / ASTM 304 / 1.4301

Sealing Ring: NGW-70 EN 682 type GBL

Added Rubber Material (Isolation):
Neoprene DIN 53504 / DIN 53507

Temperature Range: -40° F to 230° F




Locking Plug: AISI / ASTM 304 with
NBR sealing ring and thread ISO 2904

Blind Flange: Stainless steel

Bolts and Nuts: Stainless steel, 5/8" x 4", 5/8" hex

Tested Pressure: < 25" = 60 psi, > 25" = 45 psi

Maximum Allowable Operating Pressure: 20 psi

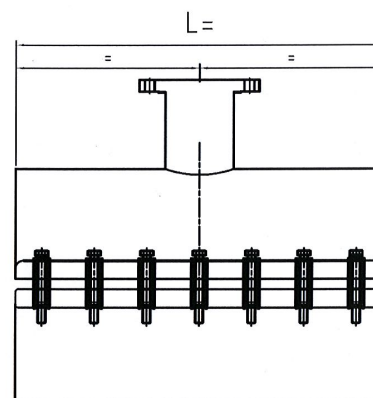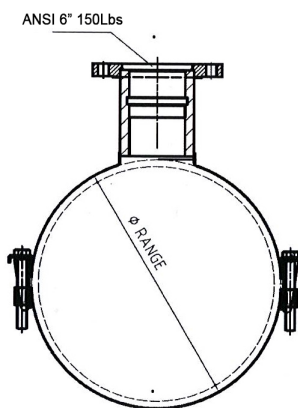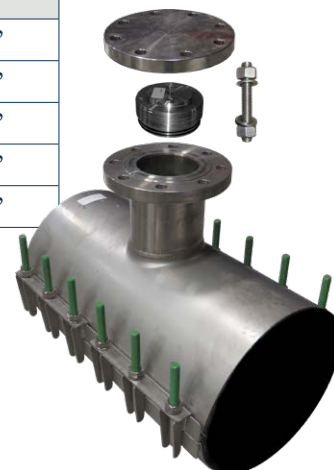

Distributed by: