
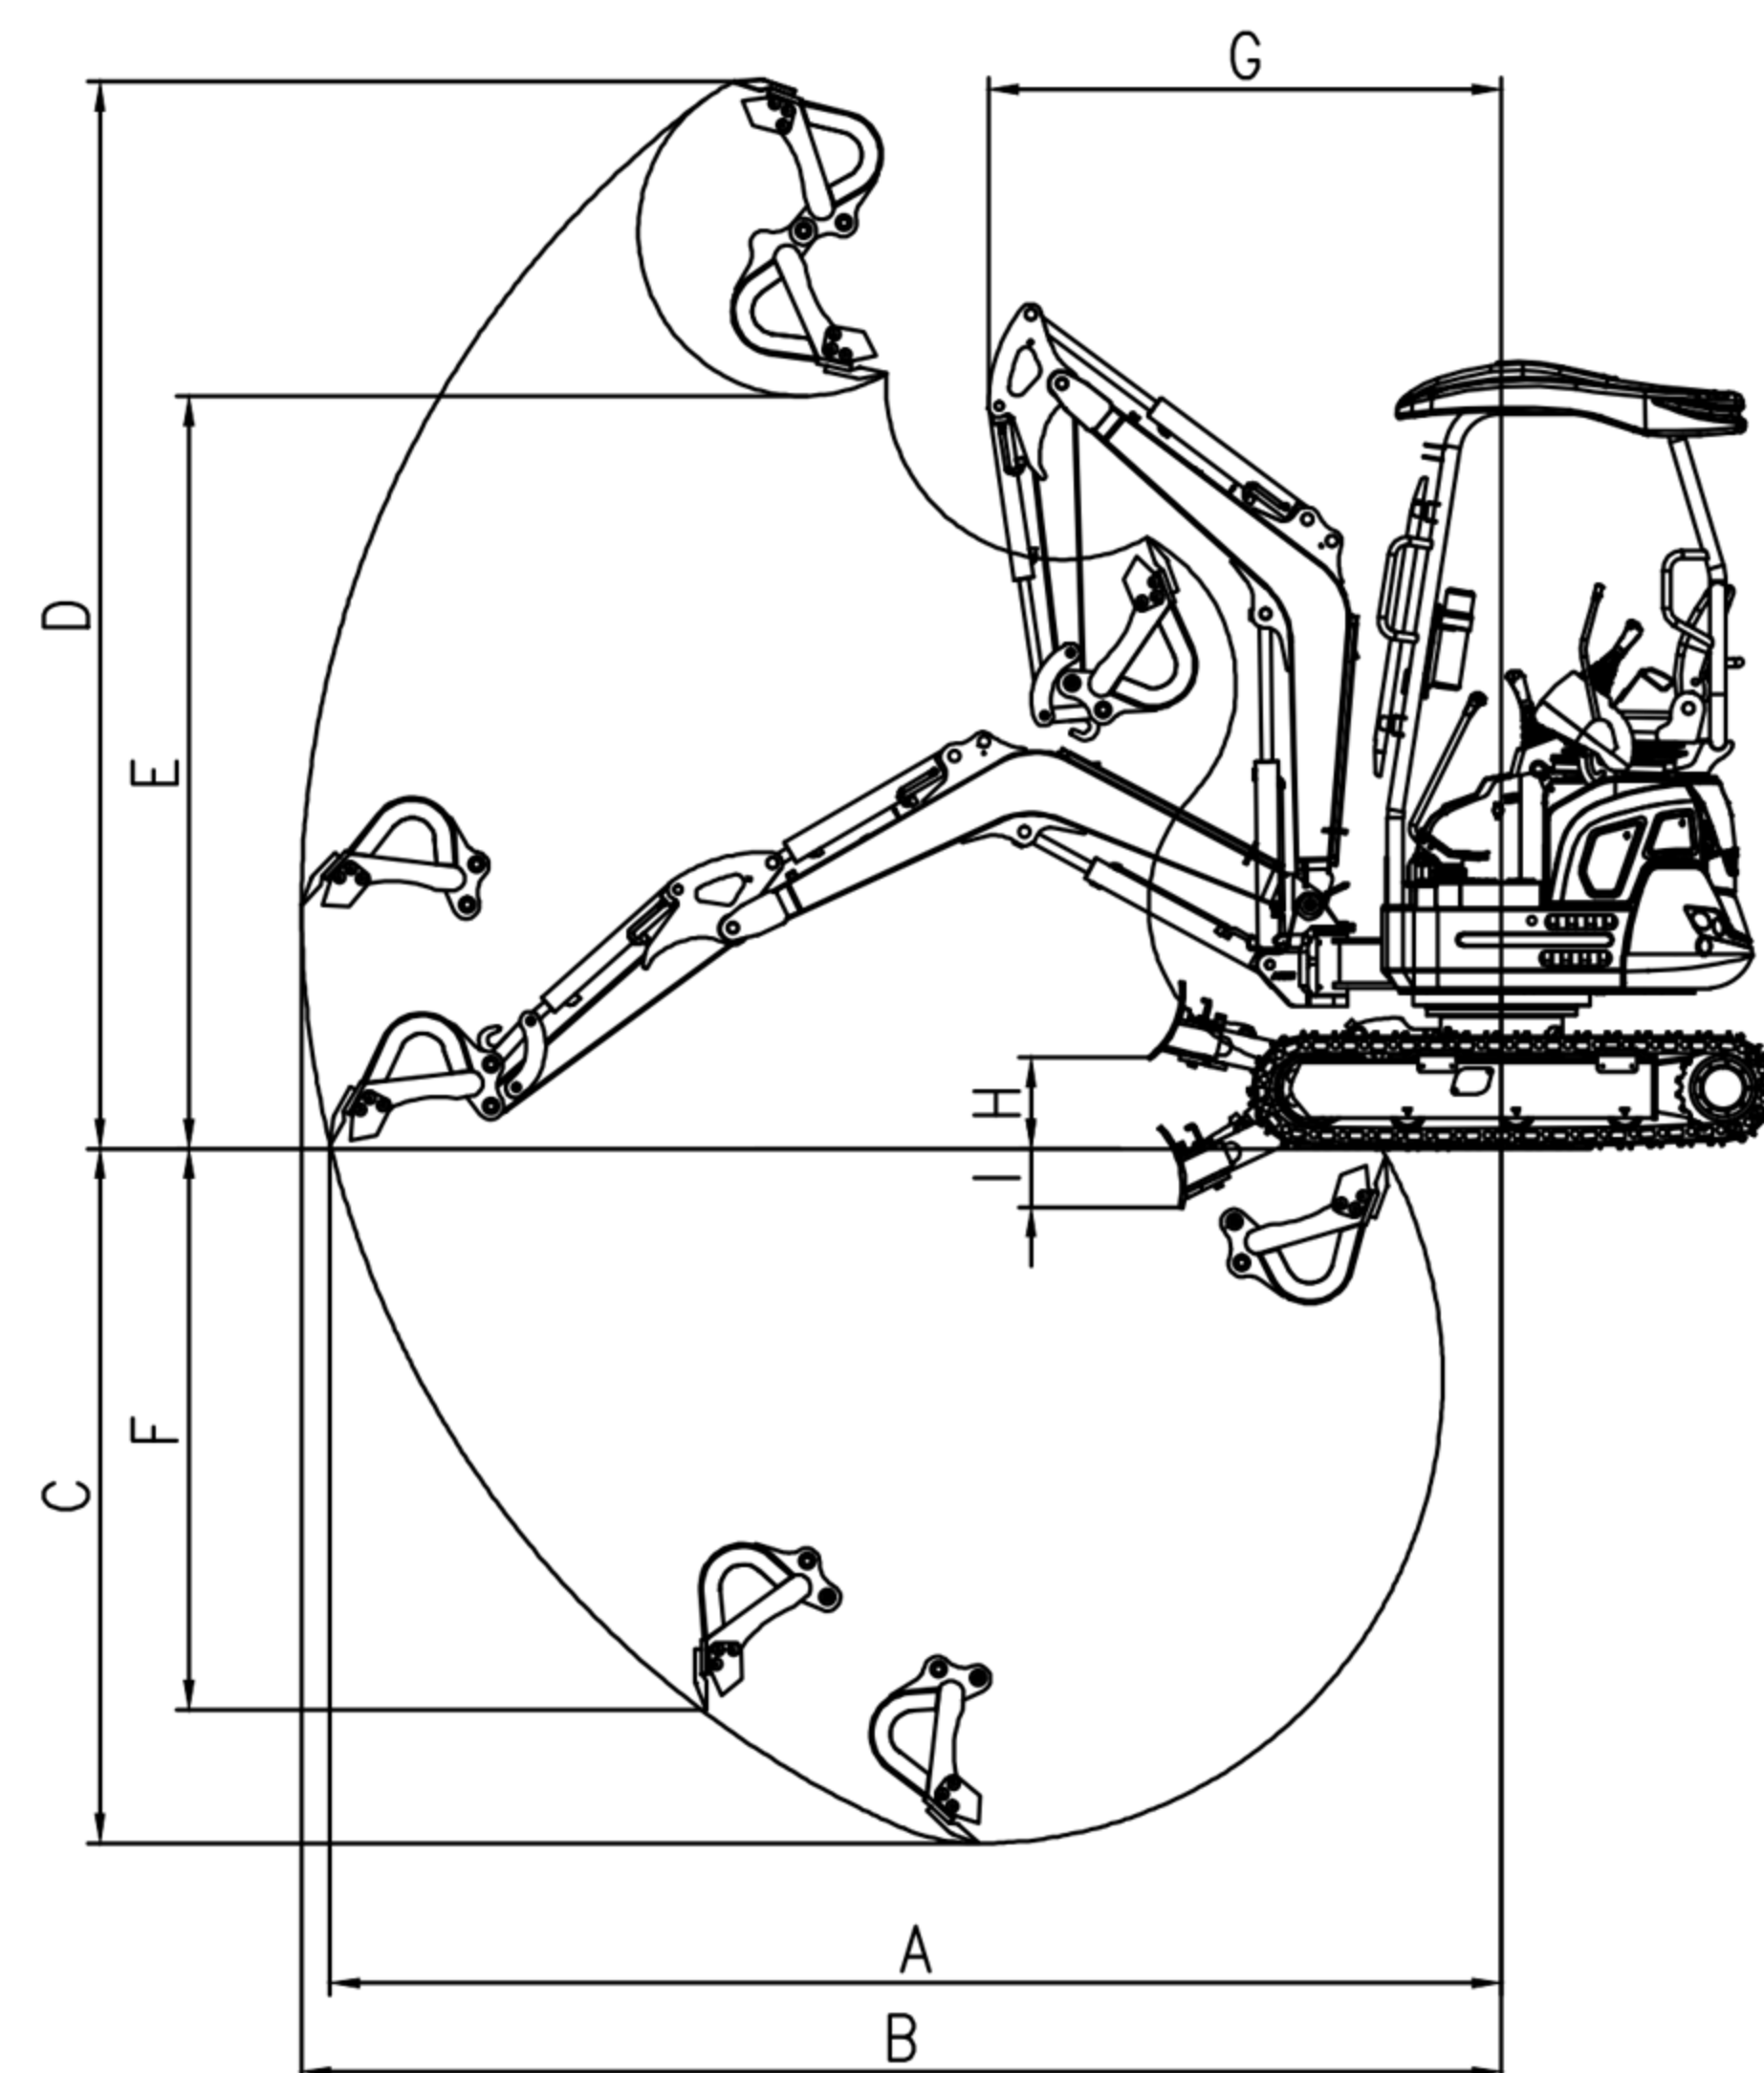
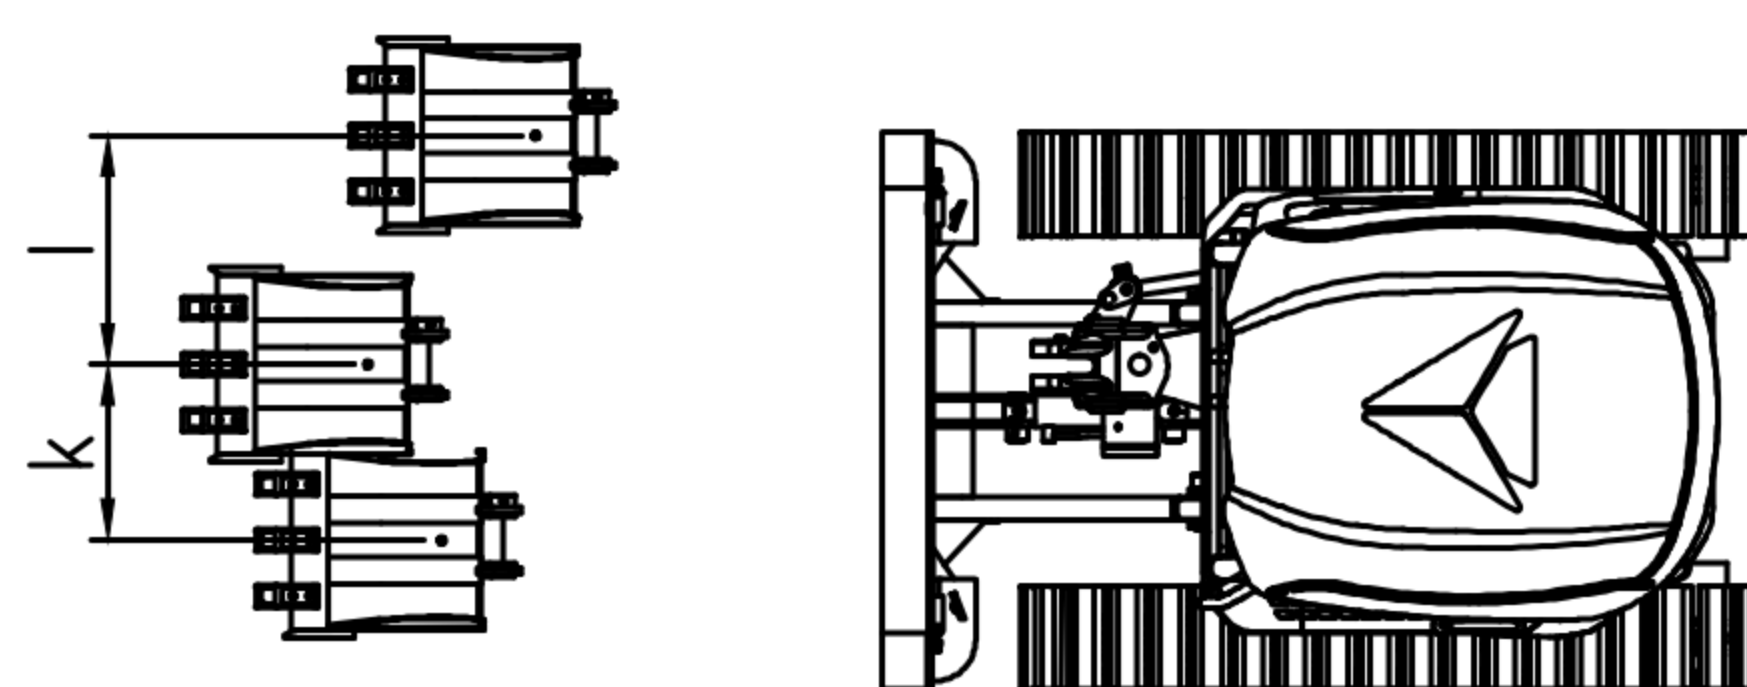


RHINOCEROS

XN18

CRAWLER EXCAVATOR

SPECIFICATION		
Operating weight		1790kg
Working device form		Backhoe
Standard bucket capacity		0.027 cbm
ENGINE	Model No.	KUBOTA D902
	Displacement	0.898 L
	Rated power	11.8 kw/2300
	Max. torque	51.3 N.m/1800
Speed and digging force	Max. travel speed	2.2 /1.7 km/h
	Swing speed	8.5 rpm
	Max. gradeability	30%
Track material		Rubber
Hydraulic and liquid capacity	Pump type	Piston pump
	Work pressure	20 MPa
	Flow rate	39.6L/min
	Hydraulic oil tank capacity	15.3 L
Fuel tank capacity		18L
OPERATING RANGE		
A	Max.digging radius on ground	3908mm
B	Max.digging radius	3700mm
C	Max. digging depth	2346mm
D	Max. digging height	3529mm
E	Max. dumping height	2481mm
F	Max. vertical digging depth	1761mm
G	Min. swing radius	1537mm
H	Max. blade lifting height	271mm
I	Max. blade lifting depth	186mm
MAIN DIMENSIONS		
a	Wheel base	1230mm
b	Track length	1590mm
c	Upper chassis ground clearance	473mm
d	Counterweight turning radius	790mm
e	Chassis width	990(1240)mm
f	Track width	230mm
g	Traci height	360mm
h	Transportation length	3655mm
i	Height of seat to ground	1760mm
j	Total height	2467mm
k	Boom swing - left	325mm
l	Boom swing - right	479mm
m	Basic length	1165mm

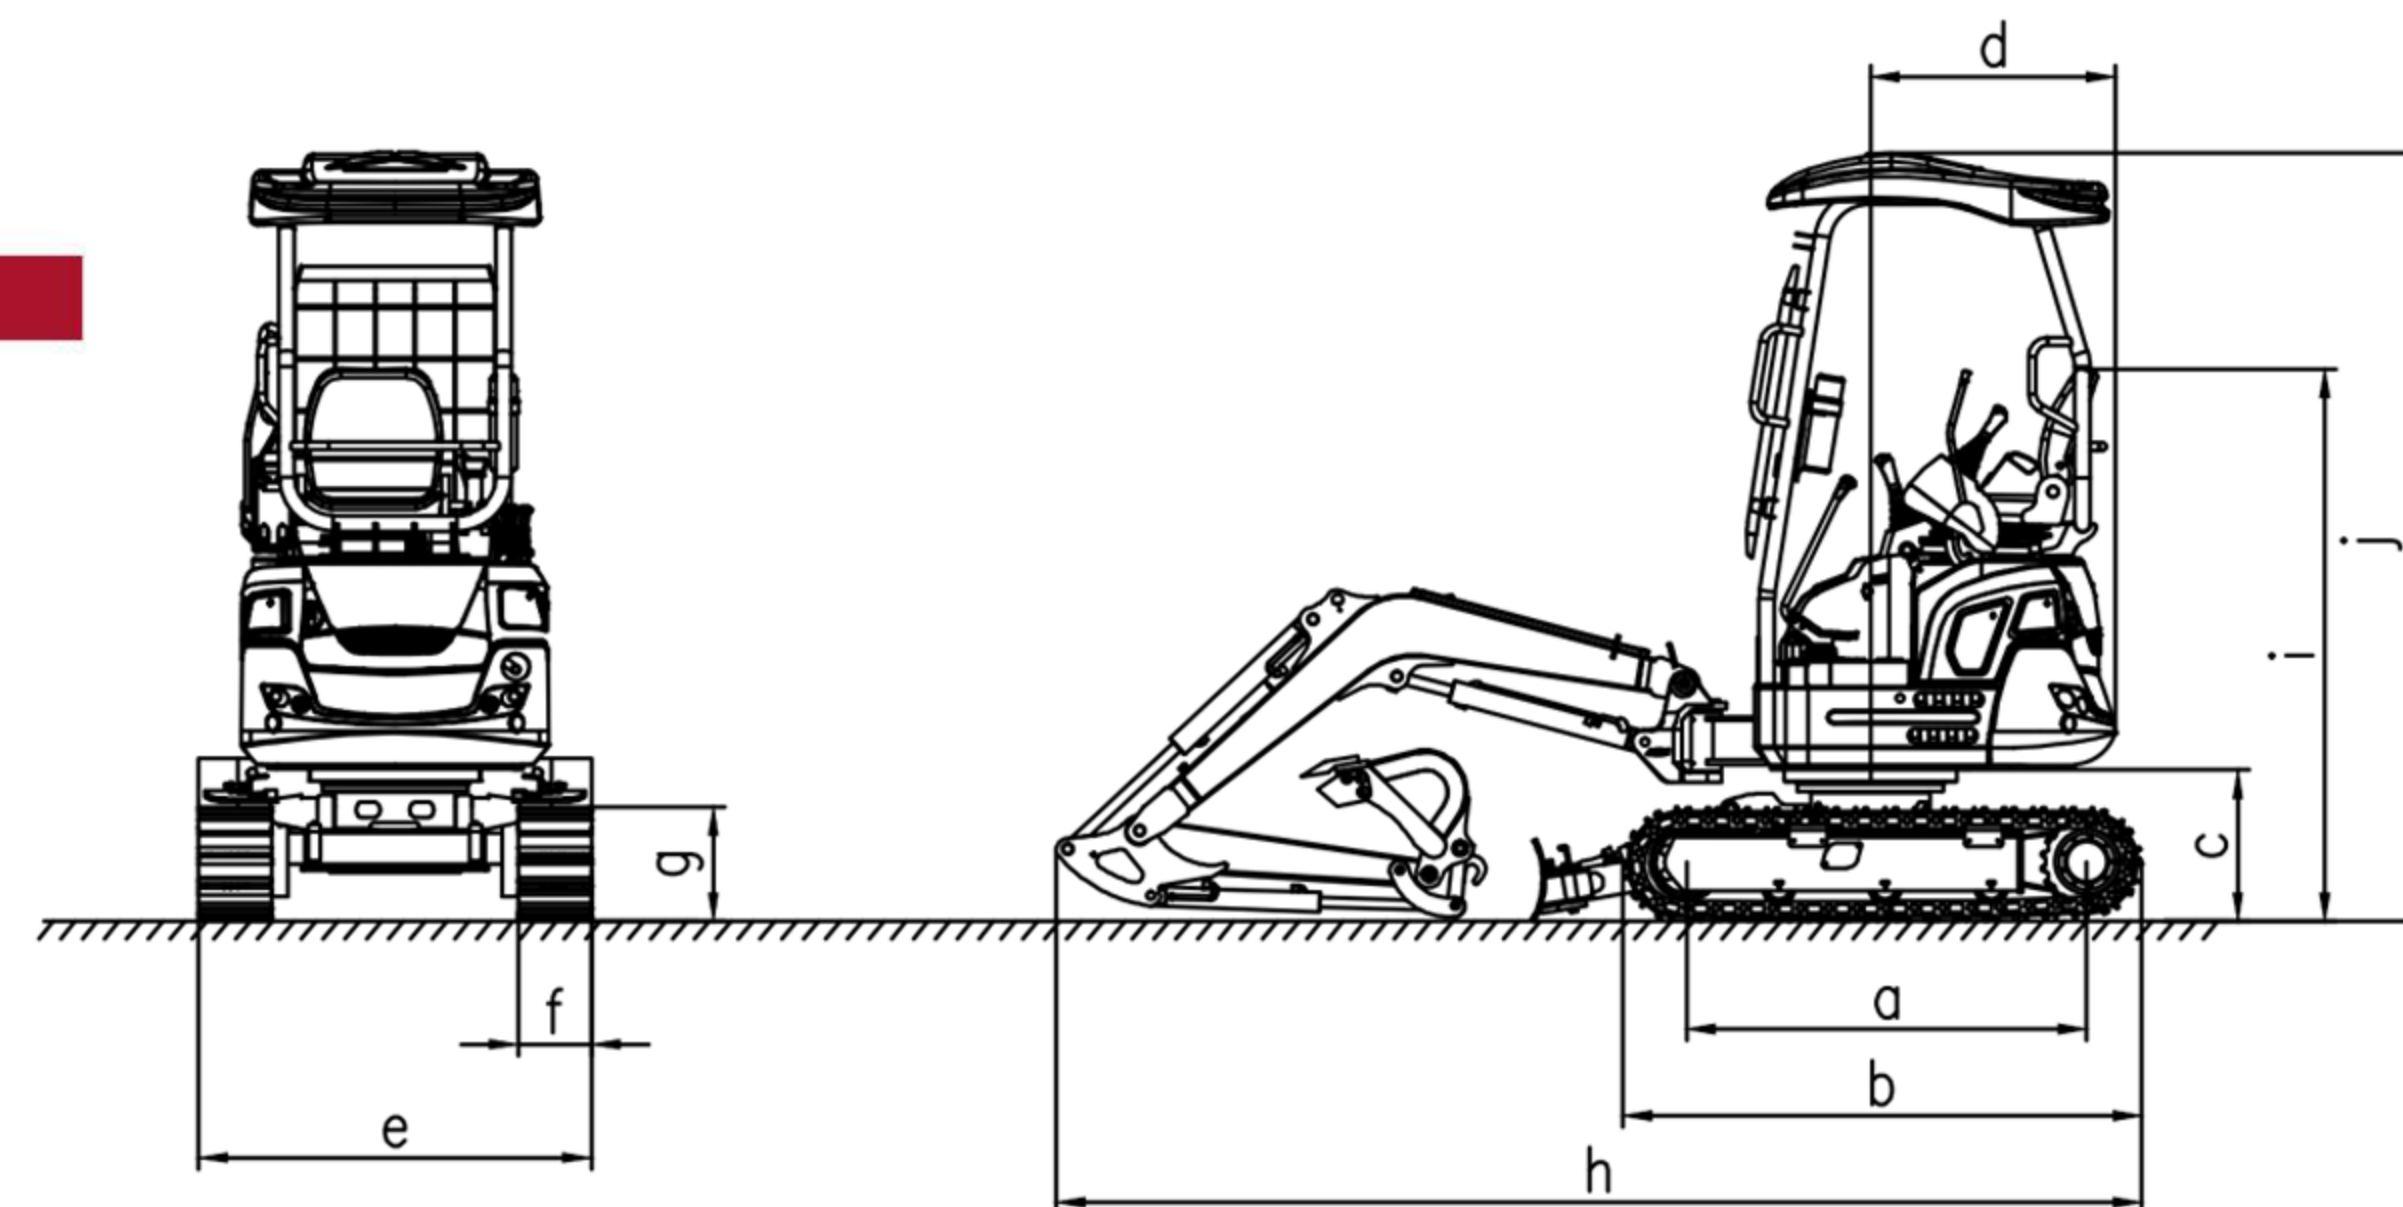

www.rhinoexcavator.com

SHANDONG KEN STONE HEAVY MACHINERY CO.,LTD



Address : Dingyuanzhai Industrial Park,Guan County,Liaocheng city, Shandong Province, China
Postal code : 252512
Website : www.rhinoexcavator.com
E-mail : office@sdxiniu.com

Factory visit



XN18

CRAWLER EXCAVATOR