


Carter 2.0 T Excavator

\$34,990 inc GST

Operating weight (ton)	2.0 T
Bucket capacity (cbm)	0.04
Engine model	YANMAR 3TNV70
Rated power (kw/r/min)	10.3/2200
Hydraulic pump model	NACHI
Max.flow (L/min)	49.5
Working pressure (Mpa)	21
Control valve model	Hydro Control
Swing motor model	EATON
Travel motor model	EATON or LKC
Fuel tank capacity (L)	22
Hydraulic oil tank capacity (L)	21
Travel speed (km/h)	2.1/4.2
Swing speed (r/min)	8.5
Max. climbing degree (%)	58
Arm digging force	8.6
Bucket digging force (KN)	13.5
Average grounding pressure (Kpa)	28
A-Overall length (mm)	3707
B-Overall width (mm)	1000
C-Overall height (to top of boom)(mm)	1170
D-Overall height (to top of cab)(mm)	2424
E-Counterweight ground clearance(mm)	484
F-Min. ground clearance (mm)	175
G-Tail swing radius (mm)	665
H-Track Ground length (mm)	1210
J-Track length (mm)	1588
K-Track gauge (mm)	760 (1090 after extension)
L-Track width (mm)	990 (1320 after extension)
M-Track shoe width (mm)	230
N-Turntable width (mm)	1000
O-Max. digging height (mm)	3327
P-Max. dumping height (mm)	2323
Q-Max. digging depth (mm)	2110
R-Max. vertical wall digging depth (mm)	1600
T-Max. digging reach (mm)	3947
U-Max. digging reach at ground level (mm)	3889
V-Min. swing radius (mm)	1625
X-Center of rotation to tail length (mm)	665
Y-Track shoe thickness (mm)	-
Z-Height of counterweight (mm)	794
A1-Ground length (in transportation)(mm)	2611
Arm length (mm)	950
Boom length (mm)	1830
Boom deflection angle left/right(°)	56/52
Max.pushing height/depth(mm)	240/198

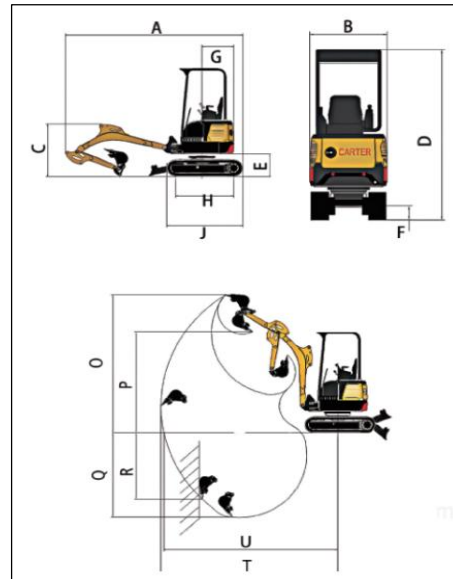

Package Inclusions:

- Hydraulic Quick Hitch
- Hydraulic Thumb
- 200 Trench Bucket
- 400 GP Dig Bucket
- 1000 Mud Bucket
- Ripper
- Rake

Melbourne
MACHINERY

www.melbmach.com.au

ph. 0408 749 619