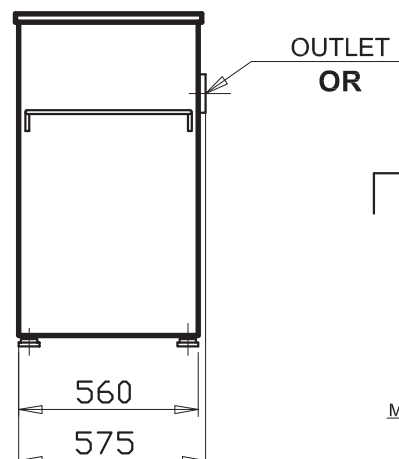
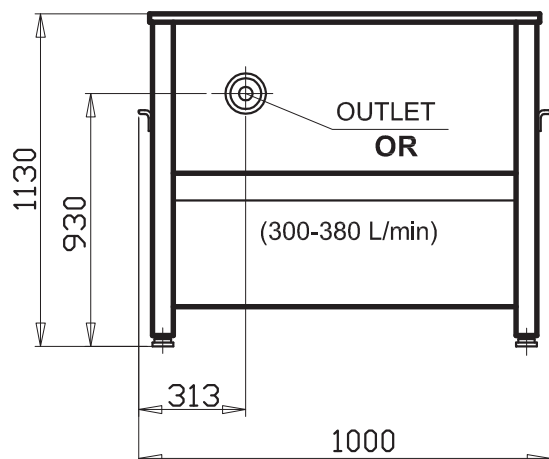
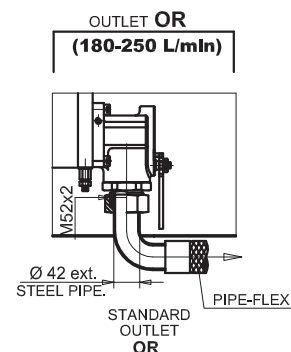
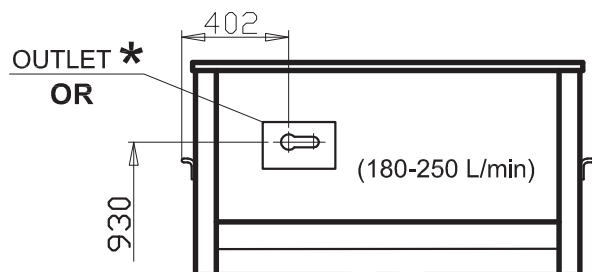


THREE-PHASE MOTOR: DA 13 / 40 CV (9.5 / 30 kW)

230 V-400 V-415 V ; (50/60 HZ)

PUMP: DA 180 / 380 L/1'

PRESSURE: DA 12 / 45 BAR

SPECIAL EXECUTION:

- 50HP MOTOR min.oil lev. 95L; use oil lev. 205L;MAX oil lev. 290L

NOTES:

- MORIS S.r.l. ALWAYS RECOMMENDS THE USE OF A STAR/DELTA STARTING FOR ENGINES WITH A POWER 16 Hp (12 Kw)
- REF TABLE N° 9017, TO CHOOSE PUMP AND POWER MOTOR
- WE ADVISABLE TO OUT (*) WITH PIPE-FLEX, WHILE IS INDISPENSABLE, IN LOCKER INSERT (LENGHT.: MIN. 2MT.)
- OUTLET WITH FLEX-PIPE 1"1/2 (M52x2) (steel pipe ø42mm)
- CABINET ARRANGEMENT: SEE CAP.16
- HEAT EXCHANGER ARRANGEMENT (OPTIONAL)

OIL QUANTITY


MINIMUM LEVEL	55 litres
USEFUL OIL	245 litres
TOTAL OIL	300 litres

POWER UNIT WEIGHT WITHOUT OIL	200 KG
-------------------------------	--------

UT	

DATA SHEET POWER UNIT CA

DATE	06/19
DWG Nr.	9211/CA

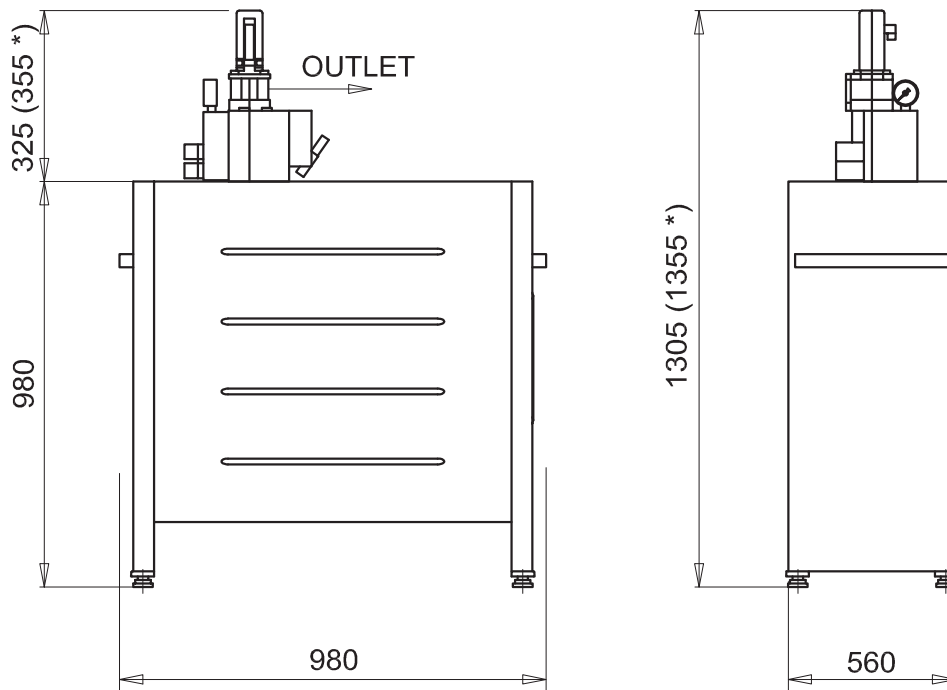

THREE-PHASE MOTOR: From 6 up to 40 CV (4.5 / 30 kW)
230 V-400 V-415 V ; (50/60 HZ)

PUMP: From 180 up to 250 L/min.

PRESSURE: From 12 up to 60 BAR

SPECIAL EXECUTION:

- PUMP From 35 up to 150 L/min.
- PUMP From 300 up to 380 L/min.


OIL QUANTITY	
MINIMUM LEVEL	55 litres
USEFUL OIL	245 litres
TOTAL OIL	300 litres

POWER UNIT WEIGHT WITHOUT OIL	138 KG
-------------------------------------	--------

NOTE:

- DISTRIBUTOR: LRV-175; LRV-350
- REF TABLE N° 9017, TO CHOOSE PUMP AND POWER MOTOR
- OUTLET WITH FLEX-PIPE 1" (M36x2) FOR PUMP From 35 L/min. up to 150 L/min.
- OUTLET WITH FLEX-PIPE 1"1/4 (M45x2) FOR PUMP From 35 L/min. up to 150 L/min.
- OUTLET WITH FLEX-PIPE 1"1/2 (M52x2) FOR PUMP From 180 L/min. up to 380 L/min.
- CABINET ARRANGEMENT: SEE CAP.16
- HEAT EXCHANGER ARRANGEMENT (OPTIONAL)

UT		DATA SHEET POWER UNIT CA-LRV	DATE	05/18
			DWG Nr.	9018/CA-LRV

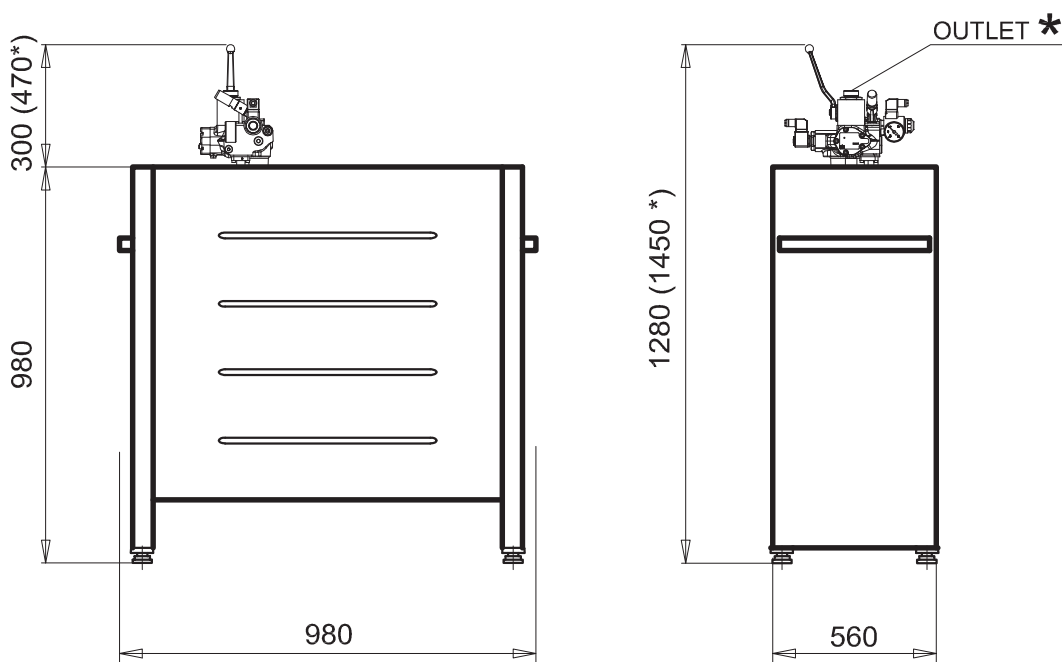

THREE-PHASE MOTOR: From 6 up to 40 CV (4.5 / 30 kW)
230 V-400 V-415 V ; (50/60 HZ)

PUMP: From 180 up to 250 L/min.

PRESSURE: From 12 up to 60 BAR

SPECIAL EXECUTION:

- PUMP From 35 up to 150 L/min.
- PUMP From 300 up to 380 L/min.

OIL QUANTITY	
MINIMUM LEVEL	55 litres
USEFUL OIL	245 litres
TOTAL OIL	300 litres

POWER UNIT WEIGHT WITHOUT OIL	138 KG
-------------------------------------	--------

NOTE:

- DISTRIBUTOR: I-VALVE 250/160; I-VALVE 250/250; I-VALVE 500/500
- REF TABLE N° 9017, TO CHOOSE PUMP AND POWER MOTOR
- OUTLET WITH FLEX-PIPE 1" (M36x2) FOR PUMP From 35 L/min. up to 150 L/min.
- OUTLET WITH FLEX-PIPE 1"1/4 (M45x2) FOR PUMP to 150 L/min.
- OUTLET WITH FLEX-PIPE 1"1/2 (M52x2) FOR PUMP From 180 L/min. up to 380 L/min.
- CABINET ARRANGEMENT: SEE CAP.16
- HEAT EXCHANGER ARRANGEMENT (OPTIONAL)

UT			DATA SHEET POWER UNIT CA-IV	DATE	06/19
				DWG Nr.	9018/CA-IV