



# How to BOOST<sup>®</sup>

step 1

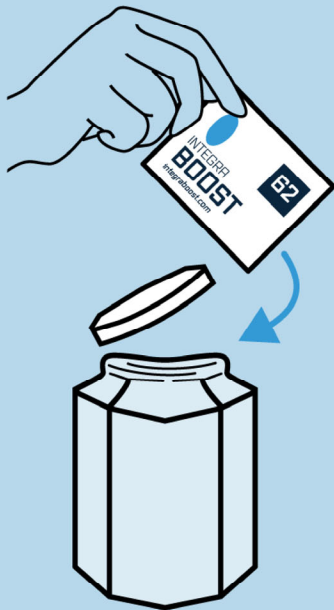

Remove Integra BOOST<sup>®</sup> packet from clear overwrap and place into a sealed container with contents to be preserved and protected.

step 2

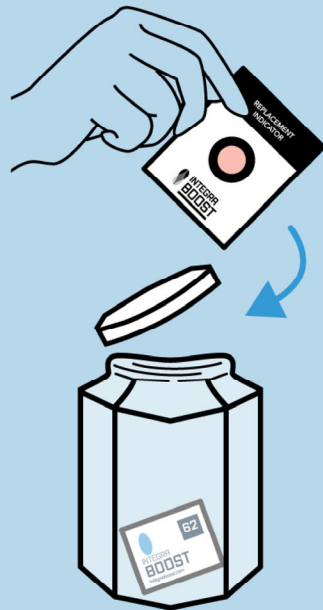


Integra BOOST<sup>®</sup> will regulate Relative Humidity (RH) inside the container to the specific RH% labeled on the packet.

step 3



Drop the Replacement Indicating Card inside the container and seal.

step 4

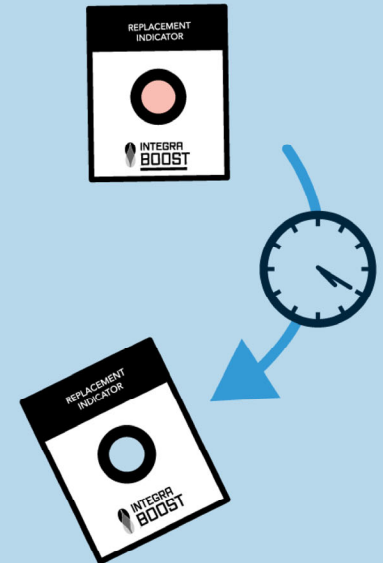

Replace packet when the dot turns blue.