



Shower Tower Spray Pad

Model # SWT 1125 375 - XX
(xx=width in inches)

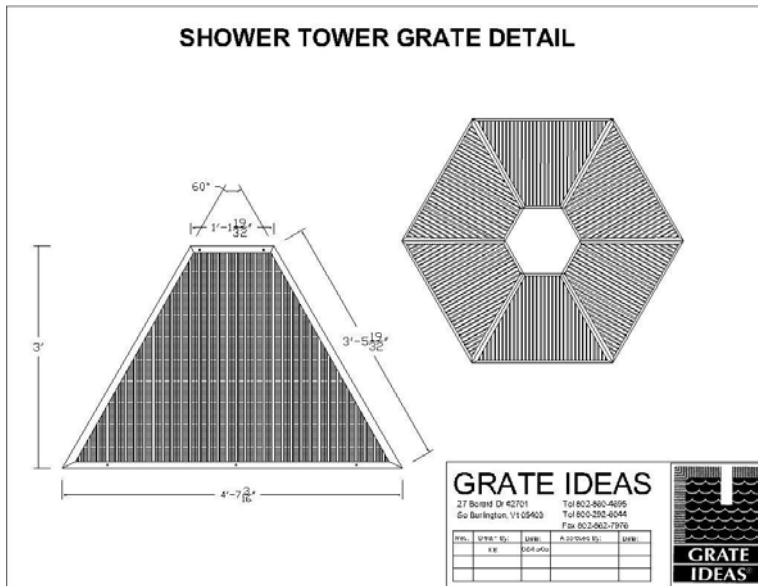

Circular Pit Cover

Model # CPC 1125 375 - XX

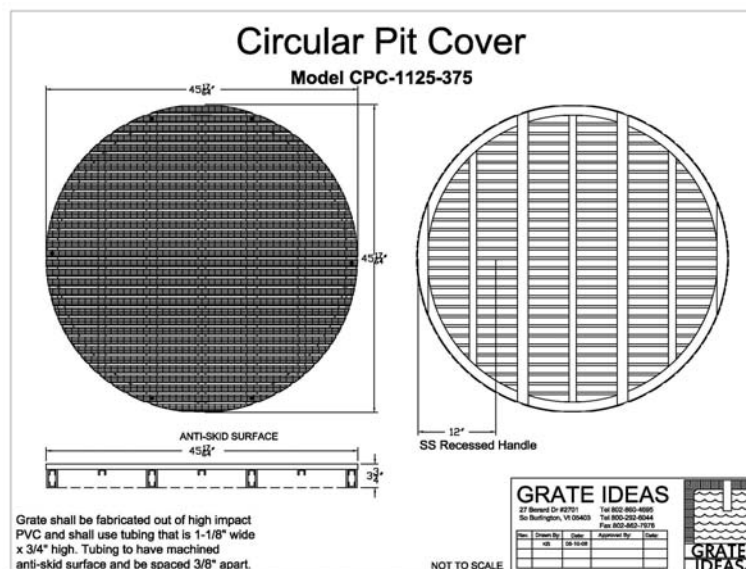

Grate shall be fabricated out of high impact PVC and shall use tubing that is 1-1/8" wide x 3/4" high. Tubing to have machined anti-skid surface and be spaced 3/8" apart.

GRATE IDEAS®

QUALITY POOL PRODUCTS & MORE



GRATE
IDEAS®

DETAILS, DETAILS, DETAILS...

Information and Specifications on "Grate ideas®" Gutter Grates

All grates are fabricated of PVC (polyvinylchloride) extrusions produced especially for the swimming pool environment. The formulation used yields a high-impact product.

The best colorfast pigments are used in association with ultra-violet resistant additives to allow the grates to be made available in color combinations which can be used both in indoor and outdoor installations.

TYPICAL PHYSICAL PROPERTIES:

	ASTM Test	At 72°F
Tensile Strength (psi)	D-638	6,100
Tensile Modulus (psi)	D-638	350,000
Flexural Strength (psi)	D-790	11,700
Flexural Modulus (psi)	D-790	415,000
Izod Impact (ft-lbs/in)	D-256	3.0
Coefficient of Linear Expansion: 3.45 in/in °F x 10 ⁻⁵	D-696	

The following colors are inventory material and readily available.

A01 WHITE A04 GRAY
A02 ALMOND A05 SAND
A03 LIGHT BLUE

Other colors are available, but may be subject to a surcharge or a minimum run.

A non-skid surface is a standard feature on GRATE IDEAS® products.

Grates may be fabricated in various color combinations.



QUALITY POOL PRODUCTS & MORE



Grate Ideas

27 Berard Drive Suite 2701
So. Burlington, VT 05403
Ph: 800-292-6044
Fx: 802-862-7976
info@grate-ideas.com

Care and Maintenance of PVC Grate Assemblies

Grate Ideas® PVC grate assemblies are designed and manufactured to be virtually maintenance free. The formulation of the PVC used in our products allows the user to maintain these assemblies as they would with any other pool equipment.

There are no specific cleaners or methods needed to clean these assemblies. If required, use only approved aquatic cleaning products that will not react with pool chemicals. Abrasive cleaners or use of abrasive cleaning medium is not recommended as it may deteriorate the non-slip surface over time.

Grates should always rest upon the trench evenly, and should not rock or wobble while in the trench. If fasteners are used ensure that the fasteners remain secure.



QUALITY POOL PRODUCTS & MORE

Warranty

Grate Ideas, Inc. warrants that all P.V.C pool grates will be free from defects for a period of ten years from the date of manufacture. Grate Ideas will repair or replace at its discretion any material found to be defective during the warranty period subject to the following conditions:

- 1) The material in question must be pre-approved for return to our factory. Call 800-292-6044 for RMA#
- 2) Material shall be packaged to prevent damage during shipping.
- 3) Material is to be returned prepaid.

Exclusions & Limitations

- 1} This warranty does not apply to replacement necessitated by misuse and negligence.
- 2} The manufacturer shall not be liable for incidental or consequential damages such as, (but not limited to) expenses for telephone, travel, legal, or damage to personal property, loss of time or inconvenience.

No other warranties other than as set forth herein is represented by the manufacturer nor is any person authorized to make any representation of any expressed or implied warranty on its behalf