

The REHAU System 4500 swing door design offers builders and architects an attractive solution for both residential and commercial markets. This versatile design provides inward and outward opening styles as well as French door configurations. Available in white, beige and clay, this system can also be laminated with solid color or wood-grain foils. Matching windows in tilt-turn, hopper, awning and fixed styles are also available.



Unique PVC corner blocks connect steel reinforcement keep swinging door corner in-square for long-term trouble-free operation

Multiple locking points and dual compression seals create a tight seal against sound, air and water infiltration

Frame accessory grooves accept a variety of accessories such as brickmolds, extension jambs and mulling components

Large reinforcement chambers accommodate the range of reinforcing shapes required for large openings in heavy commercial applications

Up to 1 3/8 in (35 mm) glazing capability increases both energy efficiency and acoustical properties

3 1/4 in (83 mm) and 2 3/8 in (60 mm) frame depths provide flexibility and allow for hassle-free replacement installation

Performance Summary


Structural: up to LC-PG40

Impact: up to DP65

Acoustical: up to STC 40

Thermal: down to 0.23*

* based on simulation

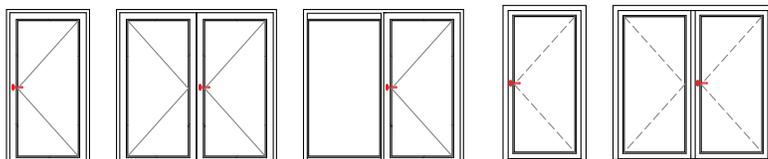

REHAU Window & Door Solutions
www.na.rehau.com

Contents based on REHAU System 4500 door design as manufactured by an independent fabricator.

© 2021 REHAU 4500802 04.21