

Industrial Door Solutions



www.antual.de

Rapid Canvas


Guillotine Doors

Designed in accordance with international standards and manufactured using the raw materials with the highest price/performance ratio, canvas doors are long-lasting products with short delivery times, easy installation and despite heavy traffic.

Designed to provide fast passage in your buildings with high vehicle traffic, low or high passage openings, folding canvas doors are ideal for windy outdoor areas, rooms with negative pressure or building sections with temperature differences.

Folding canvas doors, which have low investment and operating costs, offer customized solutions according to your structures and access traffic management needs with different color options, operation and automation alternatives and a wide range of accessories.



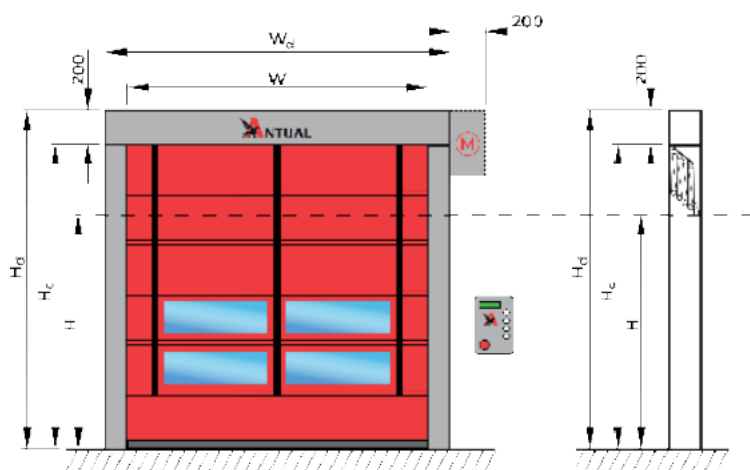

Door Dimension

	Min.	Max.
W	2.000 mm	12.000 mm
H	2.000 mm	10.000 mm

W_d (W+300)mm


H_d (Hc+200)mm

H_c (H+700)mm / H<5000 mm
(H+900)mm / H>5000 mm

Technical Specifications

Usage Area	Indoor/Outdoor	Operating Temperature	-15°C / +45°C
Speed	0,5 - 1,0 m/s	Safety	Photocell+Emergency Stop Button
Engine Power	0,75 - 4 KW (3P 380V/50Hz)	Wind Resistance	Class-3 (W<4000), Class-2 (W<6000)
Protection Class	IP 55 Motor / IP 55 Board	Water Penetration Resistance	Class-1 (W<8000), Class-0 (W<12000)
Metal Components	1311 Quality Galvanized Steel	Air Permeability	EN 12424 / Test: EN 12444
Curtain	0,8 mm PVC coated Polyester	Water Penetration Resistance	Class-2 EN 12425 / Test: EN 12489
Origin of Curtain	German	Air Permeability	Class-3 EN 12426 / Test: EN 12427
Resistance of Curtain	4000 N/50 mm	Safety Regulations	EN 13241, EN 12604, 12453
Weight of Curtain	900 gr/m ²	Mechanical Safety	EN 13241, EN 12604, 12453

Operating Options

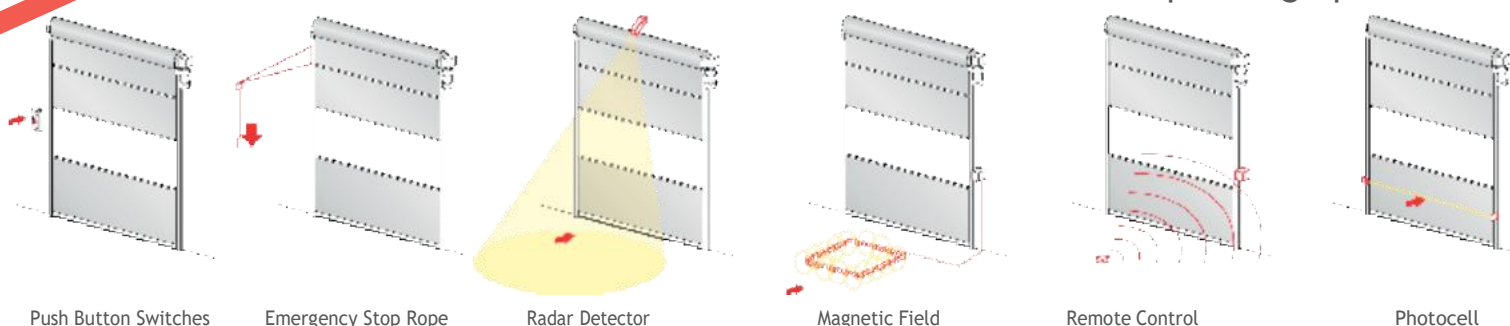

Color Options

	RAL 9010 White		RAL 1003 Yellow		RAL 3002 Red		RAL 6001 Green		RAL 7037 Dark Gray
	RAL 9002 Ivory		RAL 2008 Orange		RAL 5010 Blue		RAL 7035 Light Gray		RAL 9005 Black


Rapid Rolling Doors

They are durable, long-lasting and highly insulating products designed to be used at goods and material transfer points in markets, factories, warehouses and all other commercial/industrial buildings.

Designed to provide fast passage in buildings with high material traffic and low or medium-sized passage openings, spiral canvas doors are ideal for use indoors.

Spiral fast canvas doors, which can be strengthened with polyurethane-filled aluminum lamellas to be placed in the canvas structure according to your needs and can be provided with insulation capability, are solutions that can provide the highest passage height in areas with low ceiling height.



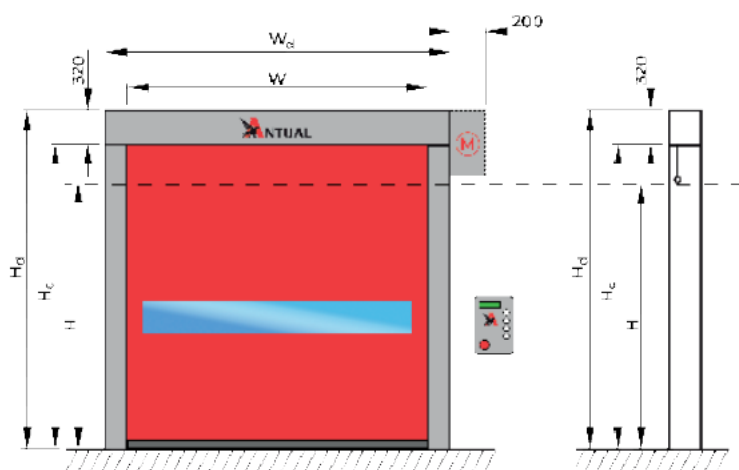


Door Dimension

	Min.	Max.
W	1.500 mm	5.000 mm
H	2.000 mm	7.500 mm
W _d	(W+210)mm	
H _d	(H _c +320)mm	
H _c	(H+250)mm	

Technical Specifications

USage Area	Indoor	Speed	0,8 - 1,0 m/s
Engine Power	0,75 - 1,5 KW (3P 380V/50Hz)	Operating Temperature	-15°C / +45°C
Protection Class	IP 55 Motor / IP 55 Board	Safety	Photocell+Emergency Sop Button
Metal Components	1311 Quality Galvanized Steel	Wind Resistance	Class-0/1 EN 12424 / Test: EN 12444
Curtain	0,8 mm PVC coated Polyester	Water Penetration Resistance	Class-1 EN 12425 / Test: EN 12489
Origin of Curtain	German	Air Permeability	Class-1 EN 12426 / Test: EN 12427
Resistance of Certain	4000 N/50 mm	Safety Regulations	EN 13241, EN 12604, 12453
Weight of Certain	900 gr/m ²	Mechanical Safety	EN 13241, EN 12604, 12453

Operating Options

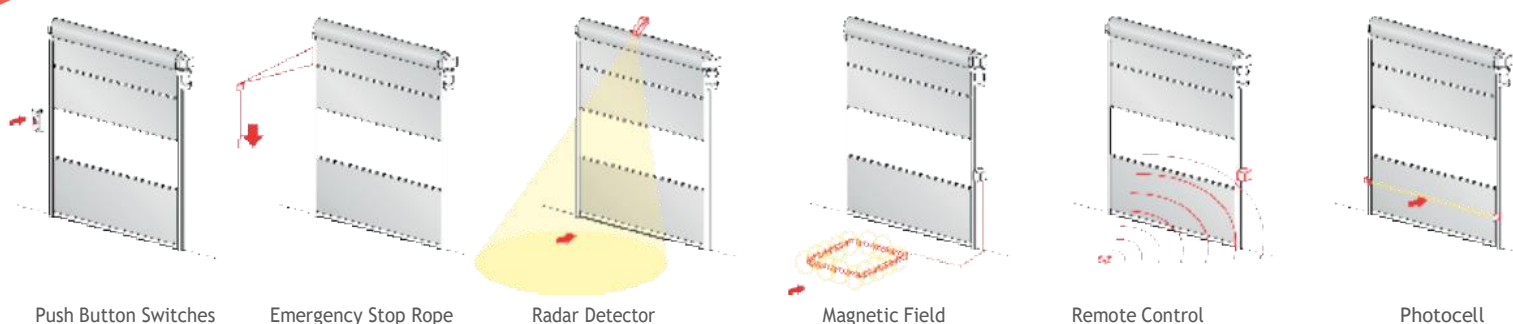

Color Options

	RAL 9010 White		RAL 1003 Yellow		RAL 3002 Red		RAL 6001 Green		RAL 7037 Dark Gray
	RAL 9002 Ivory		RAL 2008 Orange		RAL 5010 Blue		RAL 7035 Light Gray		RAL 9005 Black


Hangar Doors

Hangar doors designed to provide passage in your structures with large openings are designed to provide high level wind resistance. Wind resistance can reach up to 200 km/h.

They are durable, long-lasting and highly insulating products designed for use in aircraft hangars and shipyards.

With a specially designed poles, the hangar doors, which can be arranged side by side to reach any desired width, can reach up to 25 meter in height.



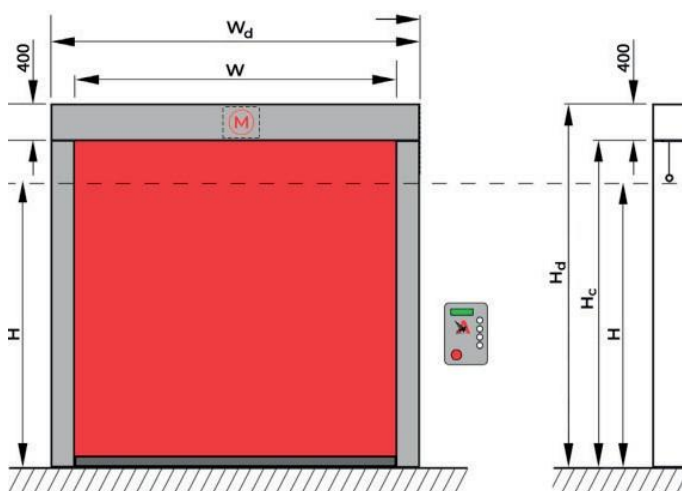

Door Dimension

	Min.	Max.
W	6000 mm	20000 mm
H	6000 mm	20000 mm

W_d (W+500)mm


H_d (Hc+400)mm

H_c (H+1250)mm

Technical Specifications

Usage Area	Indoor	Speed	10 - 12 m / dk
Engine Power	1,5-5,5 KW (3P 380V/50Hz)	Operating Temperature	-35°C / +75°C
Protection Class	IP 65 Motor / IP 65 Board	Safety	Photocell+Emergency Stop Button
Metal Components	1311 Quality Galvanized Steel	Wind Resistance	140KM/h
Curtain	0,8 mm PVC coated Polyester	Water Penetration Resistance	140KM/h
Origin of Curtain	German	Air Permeability	Class-1 EN 12426 / Test: EN 12427
Resistance of Certain	4000 N/50 mm	Safety Regulations	EN 13241, EN 12604, 12453
Weight of Certain	900 gr/m ²	Mechanical Safety	EN 13241, EN 12604, 12453

Operating Options

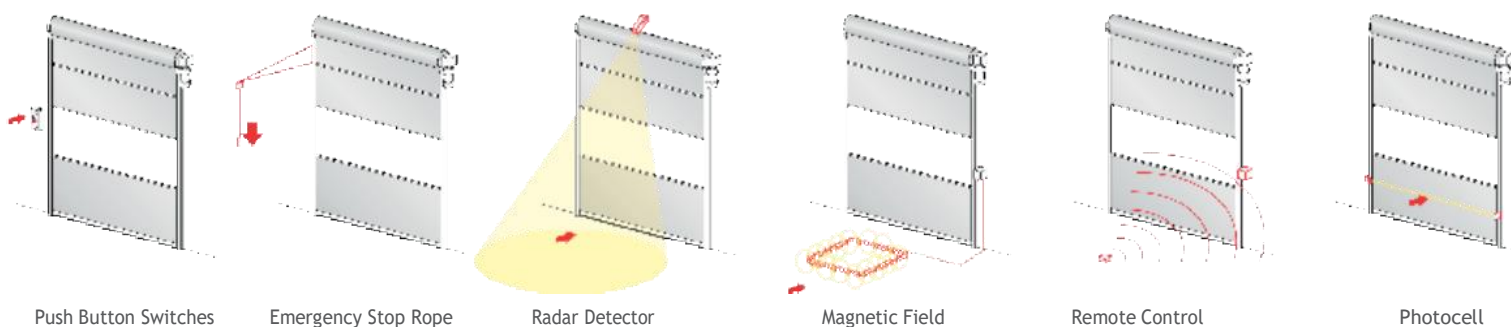

Color Options

	RAL 9010 White		RAL 1003 Yellow		RAL 3002 Red		RAL 6001 Green		RAL 7037 Dark Gray
	RAL 9002 Ivory		RAL 2008 Orange		RAL 5010 Blue		RAL 7035 Light Gray		RAL 9005 Black

PSI ProTech Service Innovations GmbH

Vogelsanger Weg 91 , 40470

Düsseldorf DEUTSCHLAND

E-mail: kontak@psiservice.de

www.annual.de

