

Front Bumper Centre Grille for 997.2

Thank you for purchasing bumper Centre grille for 997.2

Please use this document as a guide only. No liability shall be accepted whatsoever for damaged caused during or after fitment. Please seek the help of a qualify automotive technician if in doubt.

Kit Content

- Grille
- Self tapping screws

Fitting the Grilles

1. Refer to side grille kit for bumper removal (or get in contact for this)
2. With the bumper removed
 - a) Place the grille over the backside of the bumper frame then fasten using the screws provided.

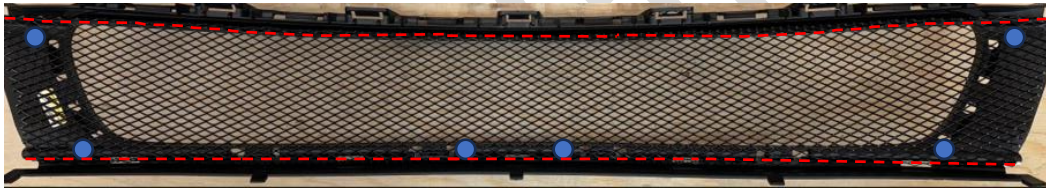


Image shown with bumper frame removed from bumper for illustration purposes

- b) The blue dots in the above image indicate suggested screw location, take care when fitting the screws ensuring they do not pierce any cabling/plumbing on the reverse face of the frame. Also ensure that the screw heads do not protrude beyond the edge of the grille frame (marked by the red dotted line in the image) this is critical as the screw heads will foul the cowl/duct when the bumper is refitted to the car.
- c) If necessary finesse the grille fitment by gently bending the return edges so that they sit as tightly as possible to the frame edges

Before Fitment Finesse



After Fitment Finesse



Porka Grills