


Utilize Wood Shims to increase/decrease resistance of door.

Use provided 3/4" x 1-1/2" Flat Bar to simulate a Failed Breach

Ram plate and shim plate are both made from ultra hardened steel armor

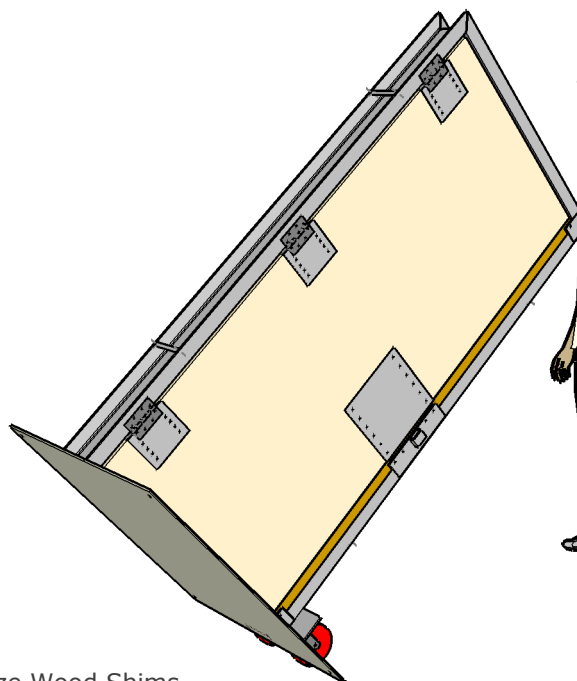



Using handles, tilt frame back onto casters for transport

Door Swing is reversible by mounting hinge plates to opposite sides of door.



Removable Caster Plate

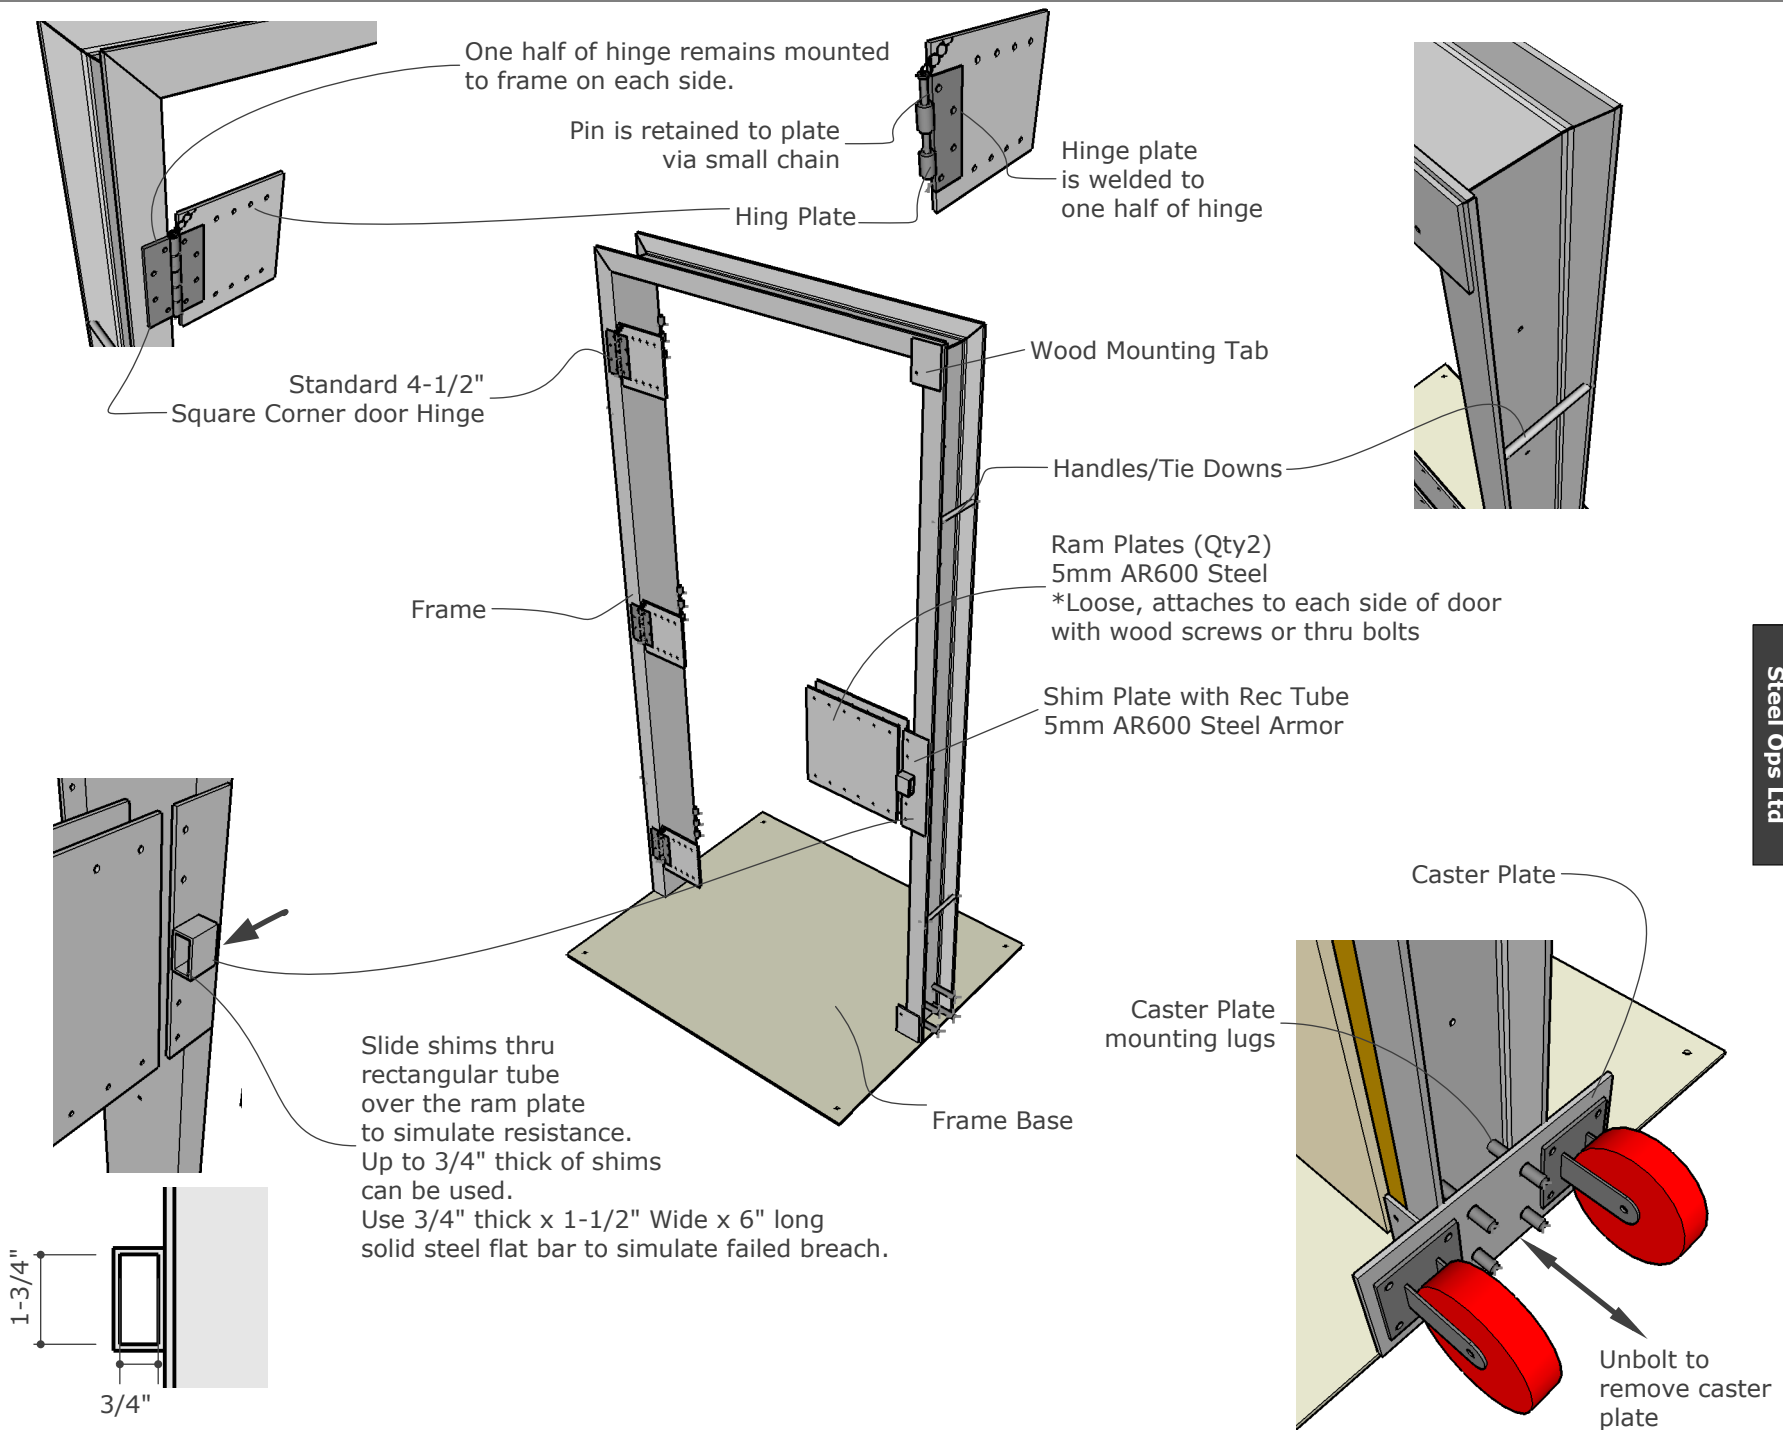

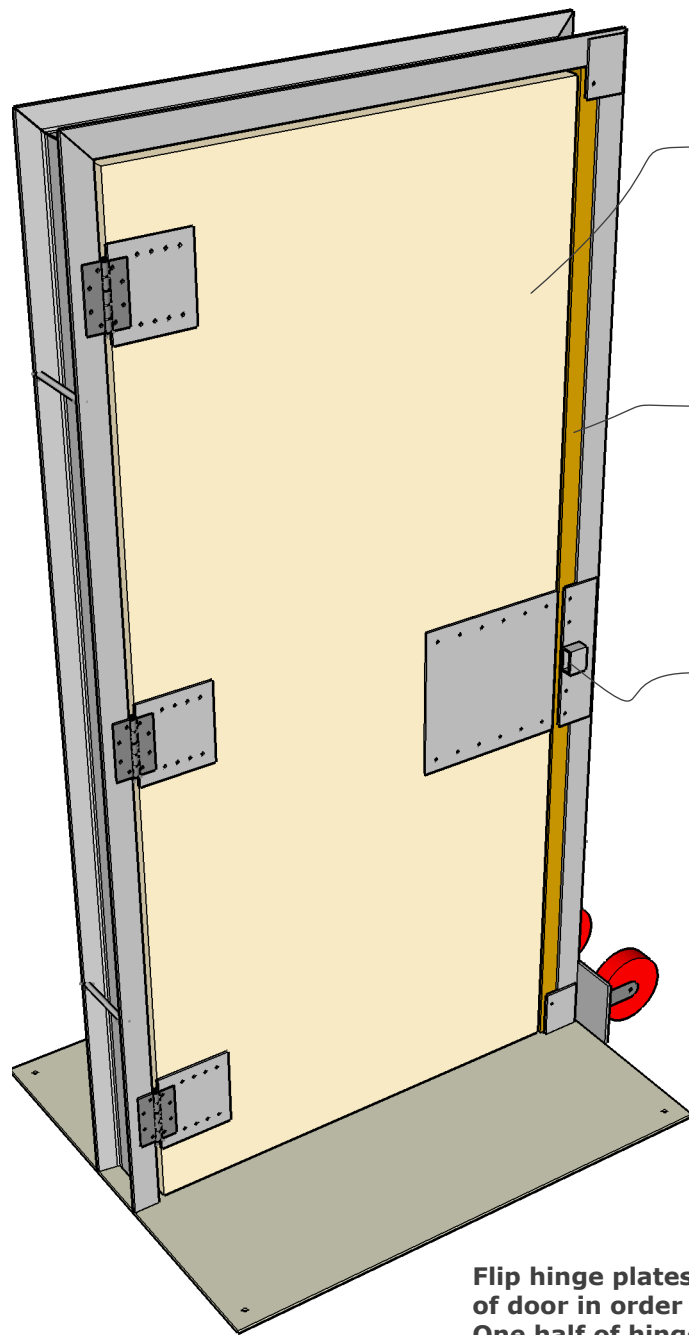

Standard Door Blank

Standard
2x6 Lumber

Slide standard
wood shims
thru rec tube
to increase/decrease
resistance of breach

Attach Plates
to Door with
1" Wood Deck Screws

**Flip hinge plates to opposite side
of door in order to reverse the swing.
One half of hinge will remain attached
to the frame while hinge plate and pin
are reversed. Pin remains attached to
hinge plate via small chain.**

