




Slide the flipper arm between the two keeper tabs on the backer plate.

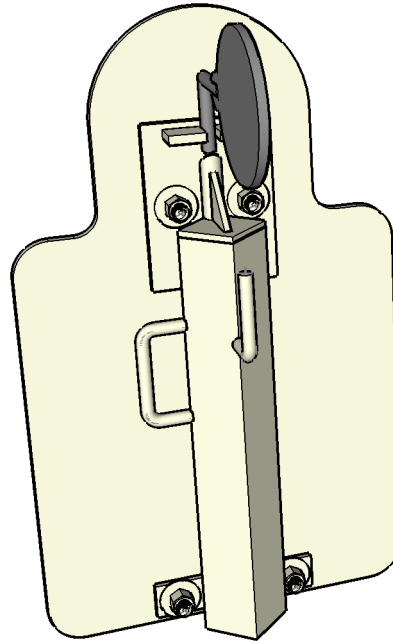

Lower the flipper arm into the flipper tube so that arm is below the keeper tabs.

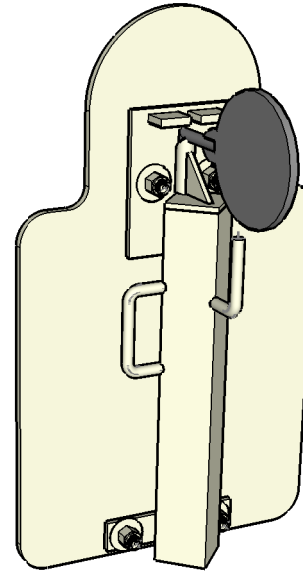

Rotate the flipper 90° to the right or left ensuring the keeper tabs are above the flipper arm

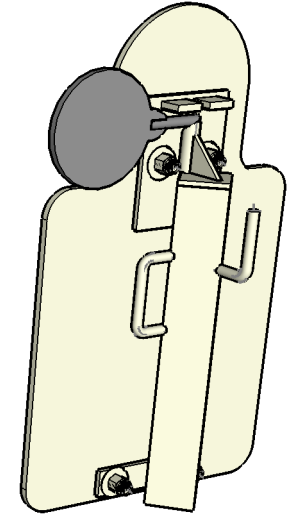

Installation is identical on T3RX-T3, T3RX-IPSC, and DT6 Dueling Tree