

## GENERAL DESCRIPTION

Inspired by modern architectural trends and minimalist design, the Portaro® Integrated solution, with its concealed aluminium frame and floor-to-ceiling doors, creates continuous and elegant plans. Product suitable for interiors with lightweight partitions (such as plasterboard / pladur type), available with a frame without top rail for floor-to-ceiling doors, or with a frame with top rail.

## DOOR

Perimetral structure in wooden or wood-based slats, edge banded vertical  
Honeycomb core with 2,2 kg /cm<sup>2</sup>, features as per standard EN 13986  
Facing in MDF with 8mm, features as per standard EN 13986  
54 mm thick with rebated vertical edges for floor-to-ceiling doors or vertical and top of the door

## FRAME

In aluminium with anodised finish and dimensions of 50 x 45 mm  
Concealed frame with or without top rail for floor-to-ceiling doors  
Compressed seal colour-matched (grey)  
Optional: frame extension in plywood or MDF, 20 mm thick, with architraves of 60 or 80 mm

## FINISHES

Naturdor® - real wood veneer or stained  
Dekordor® 3D - embossed finish, vertical and horizontal design  
Dekordor® HD - hard wearing laminate  
Lacdor - lacquered finish with approximate RAL colour


## IRONMONGERY

Magnetic bathlock  
Concealed hinges with 3D adjustment

## OPTIONS

Magnetic euro lock  
Automatic drop seal  
Concealed door closer (frames with top rail)  
Wall panels with a thickness of 10 mm, with matching door finish

## CONFIGURATIONS

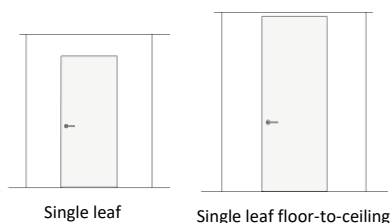


## ENVIRONMENTAL BENEFITS

Recycled content, all series  
FSC Certified wood, upon request




Note: Depending on product features or configurations, dimensions will vary. As we are constantly improving our product range, we reserve the right to make changes without prior notice. The guarantee certificate is an integral part of the technical data sheet, available at [www.vicaima.com](http://www.vicaima.com).

## VERTICAL CUT

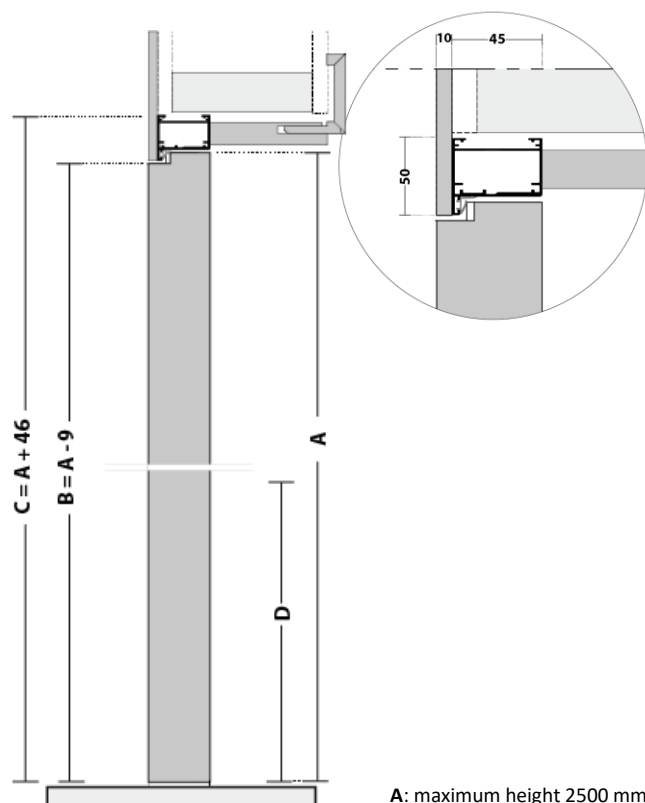


A: maximum height 2500 mm

## HORIZONTAL CUT

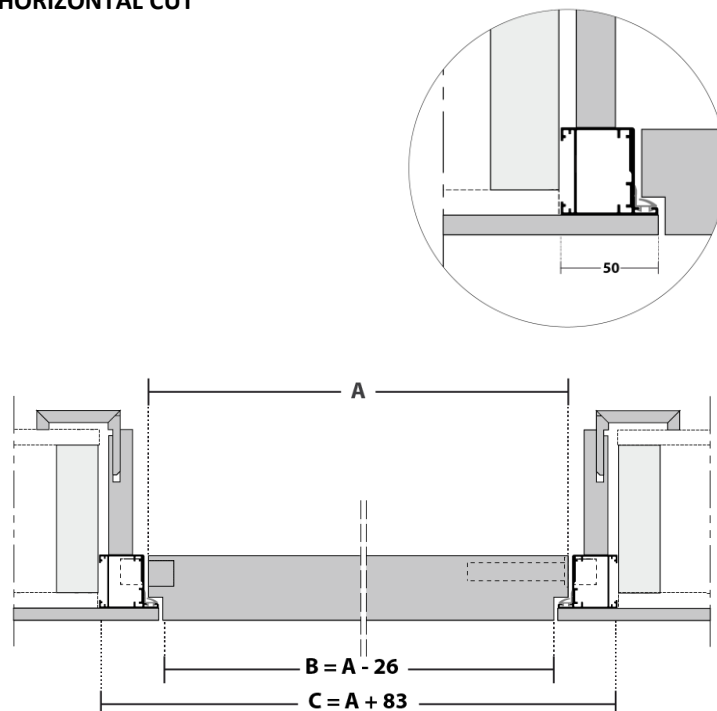

## VERTICAL CUT – DOOR FLOOR-TO-CEILING

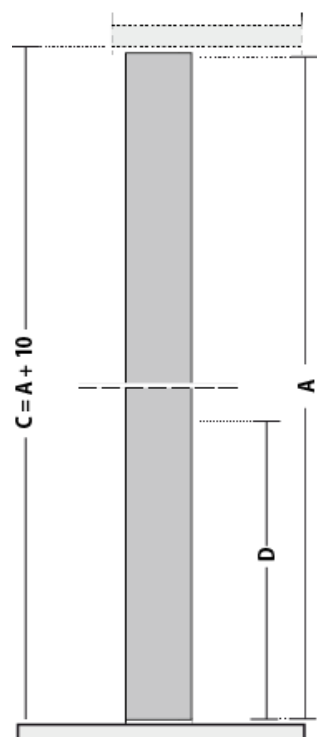


A: maximum height 2700 mm

## KEY


- A - Door width/height
- B - Effective clear
- C - Total frame width/height
- D - Handle height 1050 mm

The Portaro® Integrated is a product that requires wall levelling, therefore, we recommend installing the frame during the construction of the interior partitions.

## IRONMONGERY




Magnetic bathlock



Concealed hinges  
with 3D adjustment

## OPTIONS



Magnetic euro lock



Automatic drop seal



Concealed door  
closer

Note: Depending on product features or configurations, dimensions will vary. As we are constantly improving our product range, we reserve the right to make changes without prior notice. The guarantee certificate is an integral part of the technical data sheet, available at [www.vicaima.com](http://www.vicaima.com).