



# ***ELECTRIC FORCED AIR HEATERS***



**Optional  
Wall/Ceiling  
Mount Kit**




**Optional  
Cable Kit**

- **Powerful - Turbo Flow Cabinet Design Maximizes Air Flow and Heat Distribution**
- **Durable - High Quality Construction Throughout**
- **Portable - 10" Pneumatic Tires Makes for Ease of Movement Across Rough Terrain**
- **Quiet - Rubber Feet and Wheels Minimizes Vibration**
- **Safe - No Open Flame**



# ELECTRIC FORCED AIR HEATERS

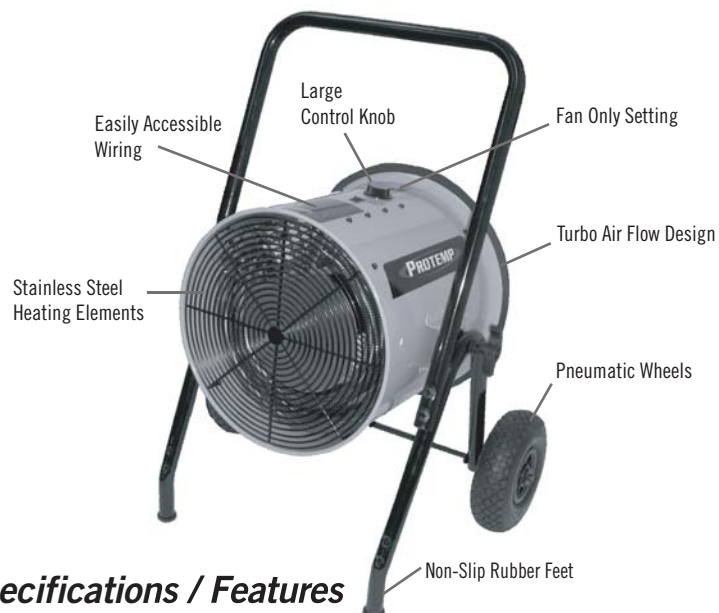

## Electric Forced Air Heaters - Product Specifications / Features

| Model  | PT-10241-SH | PT-15241-SH | PT-15208-SH | PT-15243-SH | PT-15483-SH  | PT-30483-SH |
|--|-------------|-------------|-------------|-------------|--------------|-------------|
| UPC# 6-57888...  | 072416      | 075219      | 072836      | 072430      | 074830       | 073437      |
| Heat Output (BTU's / Hr)                                 | 34,144      | 51,216      | 51,216      | 51,216      | 51,216       | 102,432     |
| Heat Type  | Fan Forced  |             |             |             |              |             |
| Hot Air Flow (CFM)                                       | 790         | 790         | 790         | 790         | 790          | 1,200       |
| Measured Air Temp Rise at Outlet (°F)                    | 64          | 100         | 100         | 100         | 100          | 142         |
| Time to 20° Heat Incr. (1,000 sq ft/1,500 sq ft) in min. | 70 / 105    | 48 / 72     | 48 / 72     | 48 / 72     | 48 / 72      | 24 / 36     |
| Time to 40° Heat Incr. (1,000 sq ft/1,500 sq ft) in min. | 140 / 210   | 95 / 143    | 95 / 143    | 95 / 143    | 95 / 143     | 48 / 72     |
| Phase  | 1           | 1           | 3           | 3           | 3            | 3           |
| Volts / Amps   | 240 / 42    | 240 / 63    | 208 / 42    | 240 / 36    | 480 / 18     | 480 / 36    |
| Kilowatts  | 10          | 15          | 15          | 15          | 15           | 30          |
| Optional Cable Kit                                       | PT-2564-EFA | PT-2543-EFA | PT-2564-EFA | PT-2564-EFA | PT-25124-EFA | PT-2564-EFA |
| Optional Wall / Ceiling Mount Kit                        | PT-WCMK-EFA | PT-WCMK-EFA | PT-WCMK-EFA | PT-WCMK-EFA | PT-WCMK-EFA  | PT-WCMK-EFA |
| Weight (Gross lbs / Net lbs)                             | 71          | 76          | 76          | 76          | 76           | 88          |
| Safety Shut-Off System                                   | Yes         | Yes         | Yes         | Yes         | Yes          | Yes         |
| Unit Dimensions: Length (port/suspend)                   | 21" / 36"   | 21" / 36"   | 21" / 36"   | 21" / 36"   | 21" / 36"    | 23" / 38"   |
| Unit Dimensions: Width (port/suspend)                    | 27" / 23"   | 27" / 23"   | 27" / 23"   | 27" / 23"   | 27" / 23"    | 27" / 23"   |
| Unit Dimensions: Height (port/suspend)                   | 39" / 23"   | 39" / 23"   | 39" / 23"   | 39" / 23"   | 39" / 23"    | 39" / 23"   |
| Container Qty (40'N/40' HQ)                              | 180         | 180         | 180         | 180         | 180          | 175         |
| Motor Approval   | UL          | UL          | UL          | UL          | UL           | UL          |
| Unit Approval  | CSA         | CSA         | CSA         | CSA         | CSA          | CSA         |
| <b>Added Value Features</b>                              |             |             |             |             |              |             |
| Warranty (1 Year)  | X           | X           | X           | X           | X            | X           |
| Turbo Air Flow Design                                    | X           | X           | X           | X           | X            | X           |
| Pneumatic Wheels   | X           | X           | X           | X           | X            | X           |
| Totally Enclosed Motor                                   | X           | X           | X           | X           | X            | X           |
| No Slip Rubber Feet                                      | X           | X           | X           | X           | X            | X           |
| Large Control Knob                                       | X           | X           | X           | X           | X            | X           |
| Thermostat   | X           | X           | X           | X           | X            | X           |
| Stainless Steel Heating Elements                         | X           | X           | X           | X           | X            | X           |
| Fan Only Setting   | X           | X           | X           | X           | X            | X           |
| Wire Fan Guard Meets OSHA Safety Req.                    | X           | X           | X           | X           | X            | X           |
| Infinitely Adjustable Thermostat Range                   | X           | X           | X           | X           | X            | X           |
| Easily Accessible Wiring                                 | X           | X           | X           | X           | X            | X           |

\*Specifications subject to change without notice. Use in accordance with any and all state or local codes, regulations, and/or ordinances. Please see heater "User's Operations and Installation Manual" included with each heater for a complete list of important safety information. **These specifications are estimates only.**

### SUGGESTED USES

Workshops  
Garages  
Farms  
Construction Sites  
Any Outdoor Temporary Need

### IMPORTANT NOTES

Not for use in residential living areas or inadequately ventilated areas  
Must be connected to an approved electrical source for operation as per the Owner's Manual  
All wiring **MUST** be done in accordance with local codes and the National Electrical Code by a licensed electrician

©2007  
PINNACLE PRODUCTS INTERNATIONAL, INC.  
668 STONY HILL ROAD, #302  
YARDLEY, PA 19067  
[www.pinnacleint.com](http://www.pinnacleint.com)  
Phone: 1-800-641-6996