



Director™ Indirect-Fired Heaters



Clean, indirect-fired heat.

Introducing the Director series of indirect-fired heaters from L.B. White. Ideal for construction heating applications requiring vented heat, the L.B. White Director heaters feature a high efficiency heat exchanger that keeps heated and combustion air separate for the ultimate in clean, dry heat.

Clean, Quiet Performance

Featuring a high capacity fuel tank, electronic flame control and automatic built-in gasoil burner, the ductable Director series delivers high performance for a wide range of tent heating needs.

Key features include:


- 100,000 & 300,000 Btu/h models
- Automatic ignition
- High capacity fuel tank
- Powerful heat throw
- Electronic flame control
- Water resistant control box
- Ductable up to 20 feet
- Runs on kerosene or #1 diesel fuel
- Accessory thermostat and ducting available

Versatile Portability

With easy-to-roll, heavy-duty wheels and a built-in handle, moving the Director from site to site is a breeze. And the Director's optional thermostat and 20 foot duct provide even greater placement flexibility.

Built to Last

Combining a stainless steel combustion chamber with a double steel plated case and durable baked enamel finish, the Director heaters are designed to deliver years of reliable performance in the toughest construction environments.

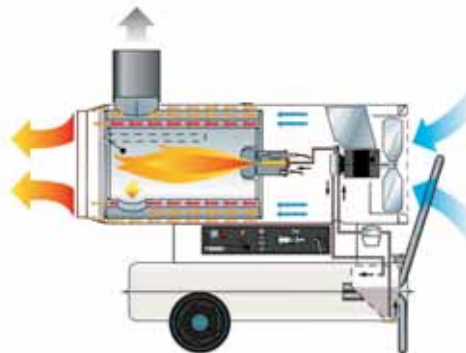

L.B. White... Experience You Can Count On

Recognized as a leader in construction heating for over 50 years, L.B. White offers a full line of direct-fired convection, portable forced air, kerosene, circulating and ductable construction heaters and torches in addition to the Director series heaters.

For more information about L.B. White direct and indirect-fired tent heaters, please contact your local L.B. White representative or contact us directly at 800-345-7200.

Director 100
Director 300



Director™ Specifications

Director 100 Director 300

Btu/h Rating:		
Input (Btu/h)	100,000	300,000
Output (Btu/h)	80,000	230,000
Heated Air Output (CFM):	883	1,942
Fuel Consumption (max.):		
Kerosene or #1 Diesel Fuel (gal./hr.)	0.77	2.16
Tank Capacity (gal.):	17.2	27.7
Ignition Type:	Direct Spark	Direct Spark
Automatic Fuel Shut-off:	S	S
Electrical Supply (Volts / Hz / Phase):	110 / 60 / 1	110 / 60 / 1
Case Material:	Baked Enamel	Baked Enamel
Dimensions (in.):		
Length	46.1	62.4
Width	19.3	26.8
Height	40.6	46.9
Net Weight (lbs.):	145.5	271.2
Shipping Weight (lbs.):	174.2	313.1
Handle:	S	S
Wheels:	S	S
Thermostat (Weatherproof NEMA 4Xw/20ft. cord):	O	O
Flexible Air Duct (14 / 16in. dia. x 20ft. length):	O	O
Heavy Duty Duct Adapter:	O	O
Preheated Fuel Filter:	O	O
Stainless Steel Exhaust Pipe Extension (5.9in. x 3.3ft.):	O	O
Rain Cap:	O	O

S = Standard O = Optional



Quality heaters you can count on.

Your L.B. White Dealer:

W6636 L.B. White Rd., Onalaska, WI 54650

(800) 345-7200

(608) 783-5691

(608) 783-6115, fax

www.lbwhite.com

© 2005 L.B. White Co.
All rights reserved.
All specifications are subject
to change without notice.

F#4996.1205