VULCAN

Item # ___

C.S.I. Section 11420

VC44E SERIES

DOUBLE DECK ELECTRIC CONVECTION OVENS









SPECIFICATIONS:

Double section electric convection oven, Vulcan-Hart Model No. (VC44ED) (VC44EC). Stainless steel front, sides, top and legs. Inde-pendently operated stainless steel doors with double pane windows. Non-sag insulation applied to the top, rear, sides, bottom and doors. Porcelain enamel on steel oven interiors measure $29\text{"w}\times22\text{"/}_8\text{"d}\times20\text{"h}$. Two interior oven lights per section. Five nickel plated oven racks per section measure $28\text{"/}_4\text{"}\times20\text{"/}_2\text{"}$. Eleven position nickel plated rack guides with positive rack stops per section. Each section heated by electric solid sheath elements rated at 12 KW. Furnished with a two speed $^{1/}_2$ H.P. oven blower-motor per section. Oven cool switch for rapid cool down. 208 or 240 volt, 60 Hz, 1 or 3 phase.

Exterior dimensions: 40"w x 42¹/₄"d x 70"h on 8" legs. Depth measurement includes door handles.

NSF listed. U L listed. U L listed to Canadian safety standards.

- □ VC44ED Solid state temperature controls adjust from 150° to 500°F. 60 minute timer with audible alarm.
- □ VC44EC Computer controls with digital time and temperature readouts. 99-hour timer with audible alarm. Roast and Hold cycle. Six preset menu selections. Shelf I.D. programming.

STANDARD FEATURES

- Stainless steel front, sides, top and legs.
- Independently operated stainless steel doors with double pane windows.
- 25 total KW.
- ¹/₂ H.P. two speed oven blower-motor.
- Moisture vent damper control.
- Oven cool switch for rapid cool down.
- Porcelain enamel on steel oven interiors.
- Five nickel plated oven racks with eleven rack positions per section.
- One year limited parts and labor warranty.

OPTIONS

- ☐ Five hour timer in place of 60 minute timer (Model VC44ED).
- ☐ Casters.
- ☐ 480V/60 Hz/1 or 3 phase.
- ☐ Second year extended limited parts and labor warranty.

ACCESSORIES


- ☐ Stainless steel rear motor enclosure.
- ☐ Extra oven rack(s).
- ☐ Rack hanger(s).
- ☐ Stainless steel drip pan.





VC44E SERIES DOUBLE DECK ELECTRIC CONVECTION OVENS

OPTIONAL VOLTAGES:

- ☐ 480 volt, 60 Hz, 3 phase.
- ☐ 220/380 volt, 50 Hz, 1 phase, 3 wire.
- ☐ 220/380 volt, 50 Hz, 3 phase, 4 wire.
- ☐ 240/415 volt, 50 Hz, 3 phase, 4 wire.





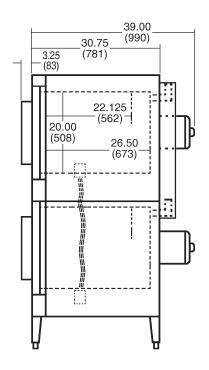

		NOMINAL AMPS PER LINE WIRE													
	TOTAL	3 PHASE LOAD KW PER PHASE			3 PHASE										
MODEL	CONN.				208 VOLT			240 VOLT			480 VOLT			1 PHASE	
NO.	KW	X-Y	Y-Z	X-Z	Х	Υ	Z	Х	Υ	Z	Х	Υ	Z	208V	240V
VC44E	25	8	8	9	70	66	70	66	58	66	28	30	30	120	104

NOTE: In line with its policy to continually improve its products, Vulcan-Hart Company reserves the right to change materials and specifications without notice.

