

Mechanical Characteristics

Number of cells (pcs)	60
Size of cell (mm)	156*156
Type of cell	Poly
Thickness of glass (mm)	3.2
Type of frame	Anodized aluminum alloy
Junction box	IP67
Size of module (mm)	1650*990*35
Weight (kg)	18.6
Cables/connectors	PV1-F,4mm ² , MC4 compatible

Maximum Ratings

Operating Temperature(°C)	-40~85
Operating Humidity(%)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s

Packing Configuration

Pieces per pallet	30
Size of packing (mm)	1690*1120*1140
Weight of packing (kg)	603
Pieces per container	840
Size of container	40' HC

Electrical Characteristics



STC	EG-260P60-C	EG-265P60-C	EG-270P60-C	EG-275P60-C	EG-280P60-C
Pmax (W)	260	265	270	275	280
Vmp (V)	30.88	31.14	31.40	31.66	31.90
Imp (A)	8.42	8.51	8.60	8.69	8.78
Voc (V)	37.75	38.08	38.41	38.74	39.01
Isc (A)	8.98	9.05	9.12	9.19	9.27
Module efficiency (%)	15.9	16.2	16.5	16.8	17.1
Maximum system voltage (V)	1000				
Fuse Rating Current (A)	15				
Power tolerance (%)	0~+3				
Temperature coefficient	Pmax (%/°C)	- (0.43±0.05)			
	Isc (%/°C)	0.04±0.015			
	Voc (%/°C)	- (0.325±0.1)			

STC: Irradiance 1000W/m², module temperature 25°C, AM=1.5

NOCT	EG-260P60-C	EG-265P60-C	EG-270P60-C	EG-275P60-C	EG-280P60-C
Pmax (W)	191.02	194.69	198.37	202.04	205.72
Vmp (V)	28.17	28.41	28.64	28.88	29.10
Imp (A)	6.78	6.85	6.93	7.00	7.08
Voc (V)	34.93	35.23	35.54	35.85	36.10
Isc (A)	7.28	7.33	7.39	7.45	7.51
Power tolerance (%)	±3%				

NOCT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

I-V Curves

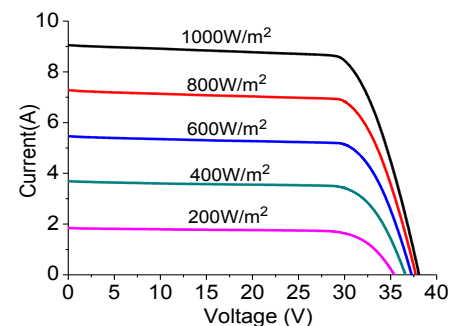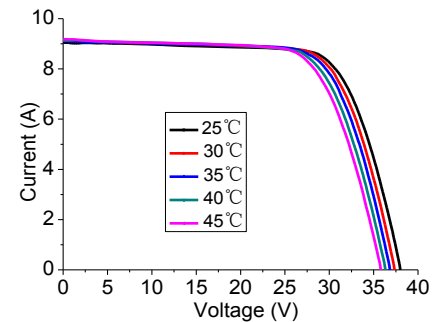

Specifications in this catalog sheet are subject to technical changes and product innovations. EGING PV reserves the right of final interpretation.