

The Artisan Collection

COLOR SWATCHES

detailed item info on back

White

Greige

Light Denim

Pumice

Charcoal

Black



Charcoal & Mix

For centuries ceramics have been a beacon of creativity in terms of patterns for other industries. Ideas flow back and forth from sartorial textiles, drapery, wallpaper and ceramics.

*In our **Artisan Collection** we have selected a complimentary mix of our favorites from all of these and translated them in simple, graphic embossed textures.*


By utilizing our deepest translucent glaze, the end result is a mixed format collection that is unobtrusive yet captivating. The randomized mix carton includes 10 textures and a separate carton for flat tile to allow a unique look and feel for every installation.

INSTALLATION & MAINTENANCE

- ◆ Ceramic wall tile is suitable for all interior wall or ceiling applications including wet areas. Not suitable for demanding environments such as steam showers
- ◆ All products should be inspected prior to installation for any defects or unacceptable color/shade variation. Claims will not be accepted after installation
- ◆ Proper substrates, preparation and installation materials are required for a successful installation. For reference please see the TCNA 09300 Tile Handbook
- ◆ Non sanded grouts are recommended for high gloss wall tiles
- ◆ Ensure all grout haze is buffed off before 48 hours have elapsed after installation
- ◆ Glazed tile should not be treated with a sealer for any reason
- ◆ To clean glazed ceramic wall tile, use a damp sponge with warm water. For heavy cleaning, use a non abrasive cleaner with a damp sponge
- ◆ Further warranty, best practices, care and maintenance details can be found on our website

TECHNICAL SPECIFICATIONS


Technical Characteristics	ASTM Test Result	ASTM/ANSI Test Method
Water Absorption %	≥10%	A 187.1
Dimensionality (flatness, warpage, straightness, etc.)	premium grade conformance	A 187.1 ISO 10545-2
Thermal Shock & Crazing Resistance	Pass	A 187.1 ISO 10545-9/11
Resistance to Stains, chemicals acids, etc.	Pass	C650 & C1378 ISO 10545-13/14

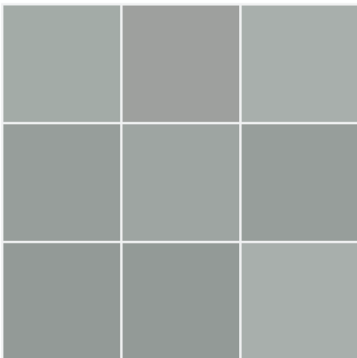


V2

Moderate Variation

WHITE

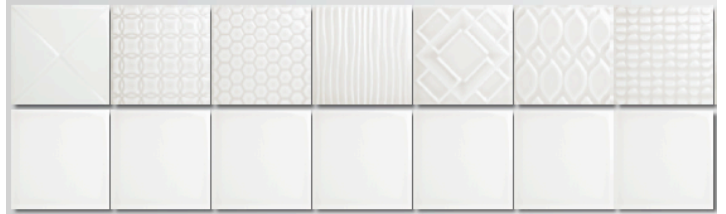

GREIGE

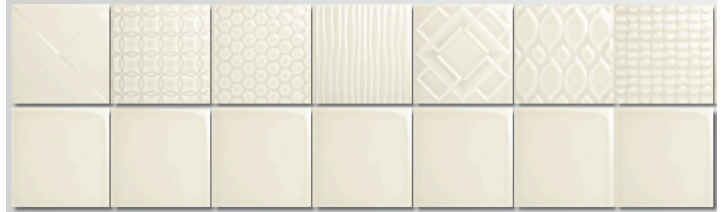


LIGHT DENIM




PUMICE



CHARCOAL

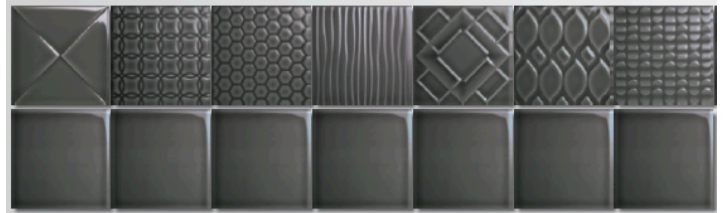

BLACK

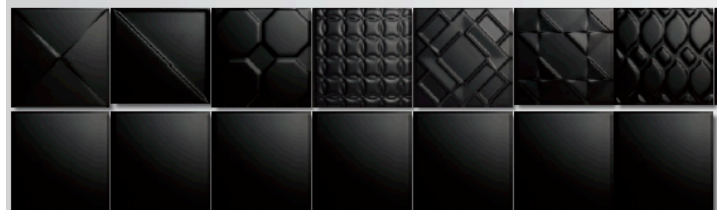

THOMAS AVENUE
CERAMICS