



Dahua Temperature Monitoring Access Control

Facial Recognition/Temperature Monitoring/Integration

WDR Camera

2.5D Curved Screen

Liveness Detection

Anti-glare Interference

Mask Recognition

Large Capacity

Fast Recognition Speed

Accurate Temperature Measurement

Abnormal Temperature Alarm



Contactless

Non-contact detection and measurement
0.3m - 0.8m



High Accuracy

Temperature monitoring accurate to **±0.3°C**



Fast Response

Facial recognition **0.2s**
Temperature monitoring **0.2s**



Easy Installation



Rapid installation and flexible deployment



Excellent Compatibility


Integration with third party products

Key Features

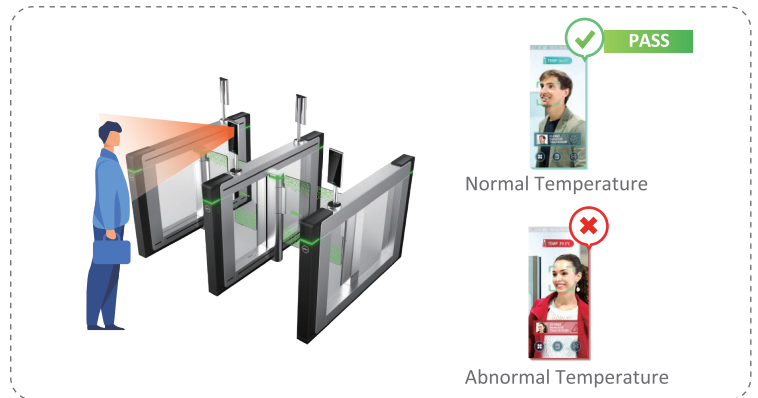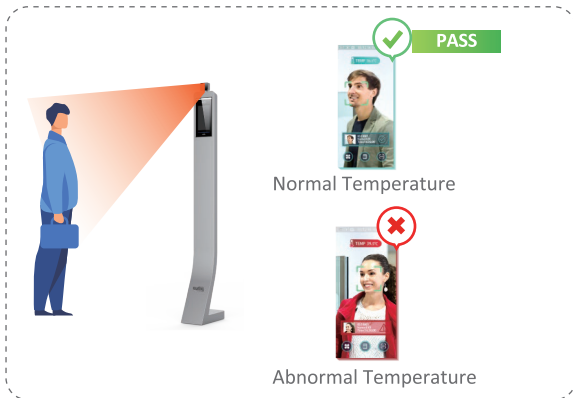


- Facial recognition is fully integrated with body temperature monitoring. This means no additional staff are required.
- The solution is contactless, reducing the risk of cross infection.
- Extensive storage of facial images and temperature information enabling easy historical access.
- Fast facial recognition and temperature monitoring reducing access congestion.
- Integration with third party products such as turnstiles and VMS.

Example Applications



Installation Scenarios

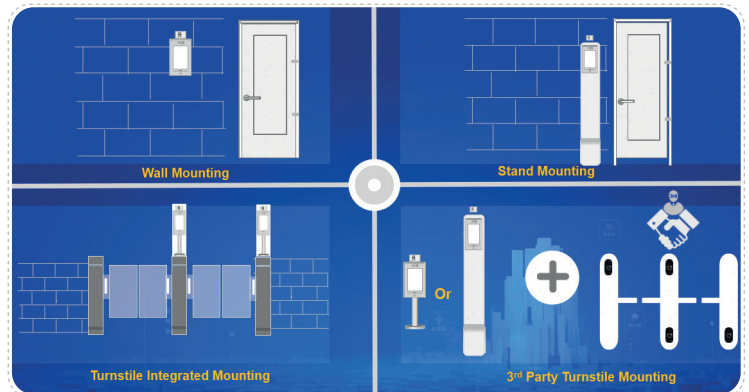

Solutions

Wall Mounted: DHI-ASI7213X-T1

Standing Mount: DHI-ASI7213X-T1 + DHI-ASF172X-T1 (Bracket)

Terminal + DSS-Express

- Temperature Accuracy: $\pm 0.3^{\circ}\text{C}$
- Temperature Monitoring
- Distance: 0.3m~0.8m
- Sound Prompt: Abnormal temperature alarm



DHI-ASI7223X-A-T1 + DHI-ASGB8XXX

Terminal + Turnstile Stand + DSS-Express

- Temperature Accuracy: $\pm 0.3^{\circ}\text{C}$
- Temperature Monitoring
- Distance: 0.3m~0.8m
- Sound Prompt: Abnormal temperature alarm



* Design and specifications are subject to change without notice.

Ver. 2, May 2020

DAHUA UK & IRELAND

Quantum House, 60 Norden Road, Maidenhead, Berkshire SL6 4AY
 Tel: +44 (0) 1628 613 500
 sales.UK@dahuatech.com
 support.UK@dahuatech.com



SCAN HERE ▶
to watch our Temperature Monitoring Access Control video.

