


Safety Precautions

The SwingAway® has been designed to be safe when used as intended; the swinging bat is the most dangerous aspect of using the SwingAway®. To ensure safe operation with maximum benefit, please read the following recommendations and review them with anyone who will be working on or around the machine.

- **A batting helmet with NOC-SAE approval must be worn** at all times when working on or around this and any other mechanized baseball equipment.
- **Inspect all parts prior to each use. Do not use if there is any sign of wear or damage.** Balls and cords are subject to wear with use. The SwingAway® is designed to be weatherproof; however, continual unprotected outside storage will accelerate deterioration of components. Contact your Rep or Rebound Sports Technology for information on maintenance and replacement parts
- **Children using the SwingAway®, or in the area of use, under the age of 12 must be supervised at all times.**
- Users must be aware of coaches and spectators in the surrounding area. We recommend for outside use that 16' X 16' area be roped off around the area before use.
- The SwingAway® net is a very effective rebounder. **DO NOT use for "pepper" drills!** In other words, do not hit a loose ball into the net. Use only a baseball or softball which has been properly attached to the SwingAway® and is in good condition.
- Hit the ball towards the net only. **Do not intentionally hit cords, net or frame.** Closely supervise beginners who may have trouble hitting the ball. Hitting the cord will accelerate cord wear. Hitting the cord will direct the bat back towards the batter creating an unsafe condition.
- Do not stand on or jump on the SwingAway®. Do not jump on the SwingAway® to dunk a basketball.
- Do not use the SwingAway® under the influence of any drugs or alcohol.
- The SwingAway® can weigh approximately 32-55 pounds, depending on the model and accessories. **The Swingaway Pro Traveler can weigh up to 55lbs.** Caution should be used in lifting and moving it request help if necessary.
- **Attach and adjust all cords and tighten knobs before use.** Hand-tighten knobs only - over-tightening may cause damage to the tubing.
- Always use the SwingAway® on level ground. Avoid wet or slippery areas.
- When using the SwingAway® on hard or smooth surfaces (indoors or out), we recommend it be placed on a piece of rubber-backed indoor/outdoor carpet. A sandbag may be used on the rear base frame loop to stabilize it when used by a "heavy hitter". A specially designed sand/gravel bag is available. Please refer to the parts form for ordering information.
- When transporting the SwingAway®, ensure it is securely fastened on or inside your vehicle.
- Exercise caution when using the pitchback net. Throw the ball lightly into the net until a feel is gained for how it rebounds.

IMPORTANT: THIS IS SERIOUS EQUIPMENT

WEAR A HELMET AND FOLLOW THE SAFETY PRECAUTIONS LISTED ON THE BACK PAGE

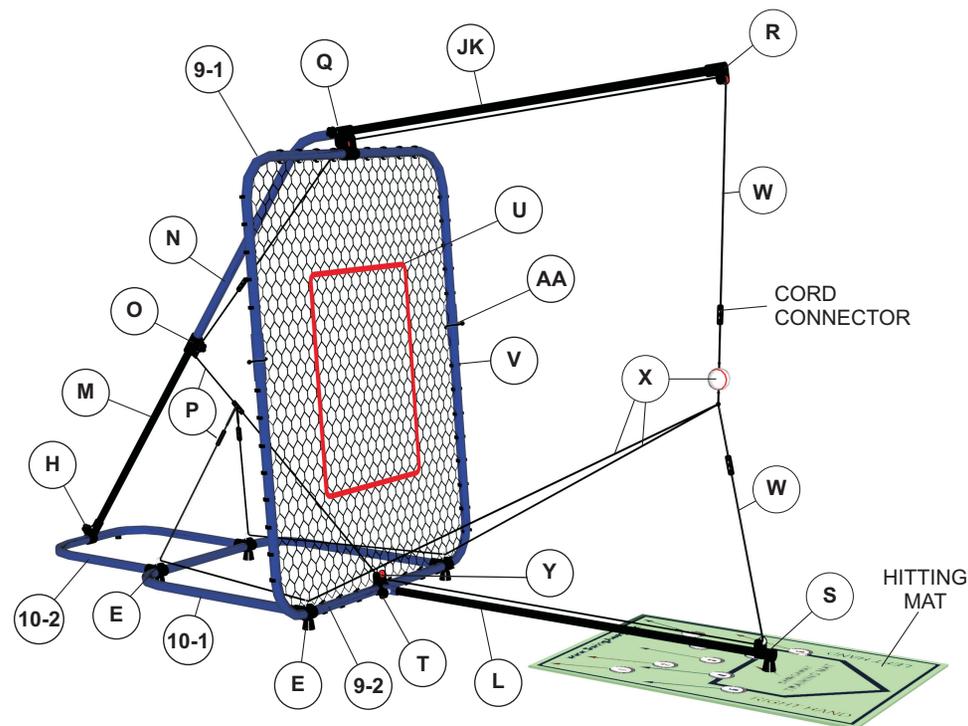

9-1	TOP FRAME HOOP	T	KNOBS (4)
9-2	BOTTOM FRAME HOOP	U	NET AND RED ROPE
E	FOOT SPLIT FITTING	V	NET CLIPS (56)
H	BASE HOOP FITTING	W	BUNGIES (3)
10-1	LARGE BASE HOOP	X	BALL WITH TETHERS
10-2	SMALL BASE HOOP	Y	MIDDLE FRAME PULLEY
JK	TOP BOOM (53")	Z	TRAVEL BAG (not shown)
L	BOTTOM BOOM (53")	AA	BUNGEE BALLS (2)
M	INNER TELESCOPE		
N	OUTER TELESCOPE		
O	TELESCOPE FITTING		
P	HEIGHT ADJUST ROPE		
Q	BOOM SUPPORT FITTING		
R	TOP BOOM PULLEY		
S	BOTTOM BOOM PULLEY		

Note: The PRO TRAVELER comes standard with 1/4" institutional-grade bungees.

Dear SwingAway Customer,

Thank you for your new purchase of a SwingAway Batting System. Today will launch a New Chapter in your baseball or softball career. Your hard work and dedication combined with your New SwingAway will make you a better Hitter! Below are several IMPORTANT Steps to make sure you have a Long Term and POSITIVE Experience with your SWINGAWAY Hitting System.

WARRANTY SwingAway Sports Products stands 100% behind all of our products. Please check the contents of the box to make sure ALL the parts and components are intact. Remember some of the components listed may be Pre-Assembled. If a part is missing or was damaged during shipping call SwingAway IMMEDIATELY at 800-999-1968 or email us at service@swingaway.com. Our Customer Service Professionals will take complete care of any issue. (ALL MODELS HAVE A 90 DAY LIMITED WARRANTY)

DO NOT CALL OR TAKE BACK THE MACHINE TO THE RETAILER. They do not carry our Parts and Components. Please register your purchase on-line at <http://www.swingaway.com/warranty.htm>

It is extremely important to assemble your SwingAway Properly. Please follow all assembly instructions exactly as described in this manual. For further detailed instructions, please visit our Social Media Sites below for the most up to date videos. Please pay close attention to [How to assemble and Attach the Ball-Kits, Tether and Bungees.](#)



SwingAway's Facebook Page - Open the following link and remember to "Like Us" <http://www.facebook.com/SwingAwaySports>
- This page will allow you to follow us while posting comments, pictures, videos and stay current with all news related to SwingAway.



SwingAway's YouTube Channel - Open the following link Subscribe to this channel: <http://www.youtube.com/user/HittingPro>
- This channel is constantly updated with assembly instructions, testimonials, instructional videos and other news about SwingAway.



SwingAway's Twitter Page - Open the following link and remember to "Follow Us" <http://www.twitter.com/SwingAwaySports>
- This page will allow you to follow us, read tweets, pictures, videos and stay current with all news related to SwingAway.

Remember if you have any questions or issues with your New SwingAway, Contact us directly. Your retailer can not help or give you the Technical Support or Replacement Parts

Once the SwingAway is set up properly, then you are ready to SWINGAWAY and achieve your True Hitting Potential and "GET REAL GOOD, REAL FAST"!!!

John J. Flading

President and CEO
SWINGAWAY SPORTS PRODUCTS, INC

HITTING MAT

FOR RIGHT HANDED HITTERS

ALIGN THE MACHINE TO SIMULATE INSIDE AND OUTSIDE PITCHES



OUTSIDE PITCH

MIDDLE PITCH

INSIDE PITCH

FOR LEFT HANDED HITTERS

ALIGN THE MACHINE TO SIMULATE INSIDE AND OUTSIDE PITCHES



OUTSIDE PITCH

MIDDLE PITCH

INSIDE PITCH



2 BASEBALL KITS

\$49.99

FREE SHIPPING


(SA-BBK)
PROFESSIONAL TUNE UP KIT

This kit includes an Authentic (Rawlings or similar) institutional baseball, ball rope and 3 institutional bungee cords, which are stronger and more durable.


STEP 11

ADJUST THE BALL HEIGHT AND GET YOUR HITTING MAT OUT

VERY IMPORTANT:
BEFORE YOU HIT THE MACHINE
MAKE SURE ALL YOUR
CONNECTIONS ARE TIGHT AND THE CORDS
AND BUNGEEES ARE TAUT
AND READ THE SAFETY LIST
ON THE BACK PAGE!

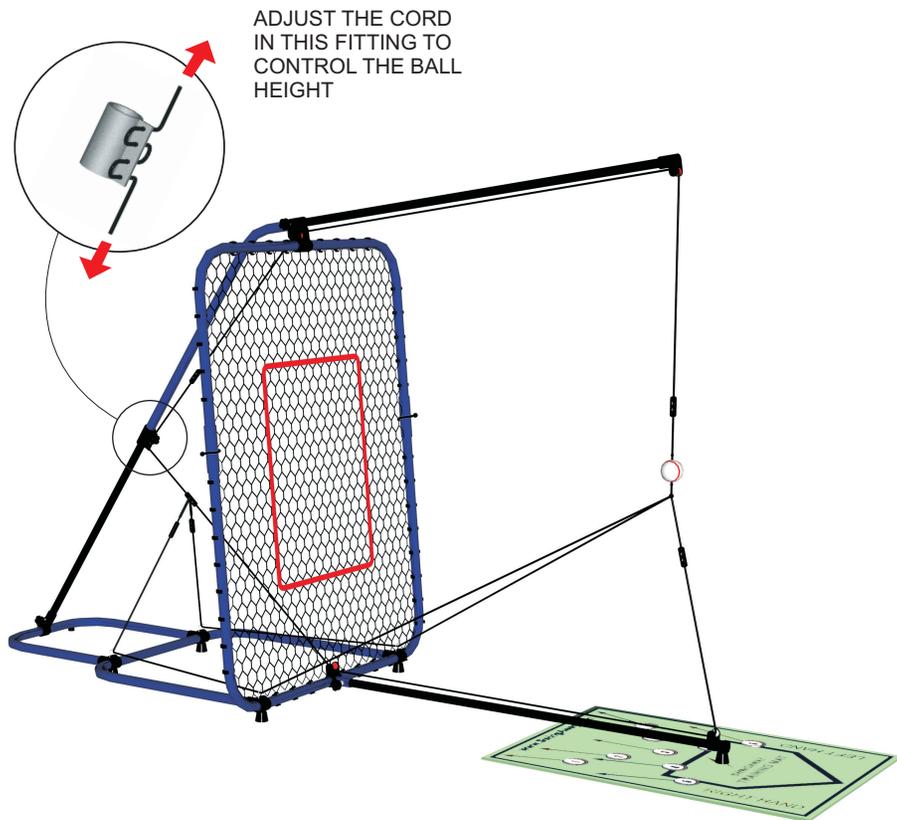

IN THE BOX

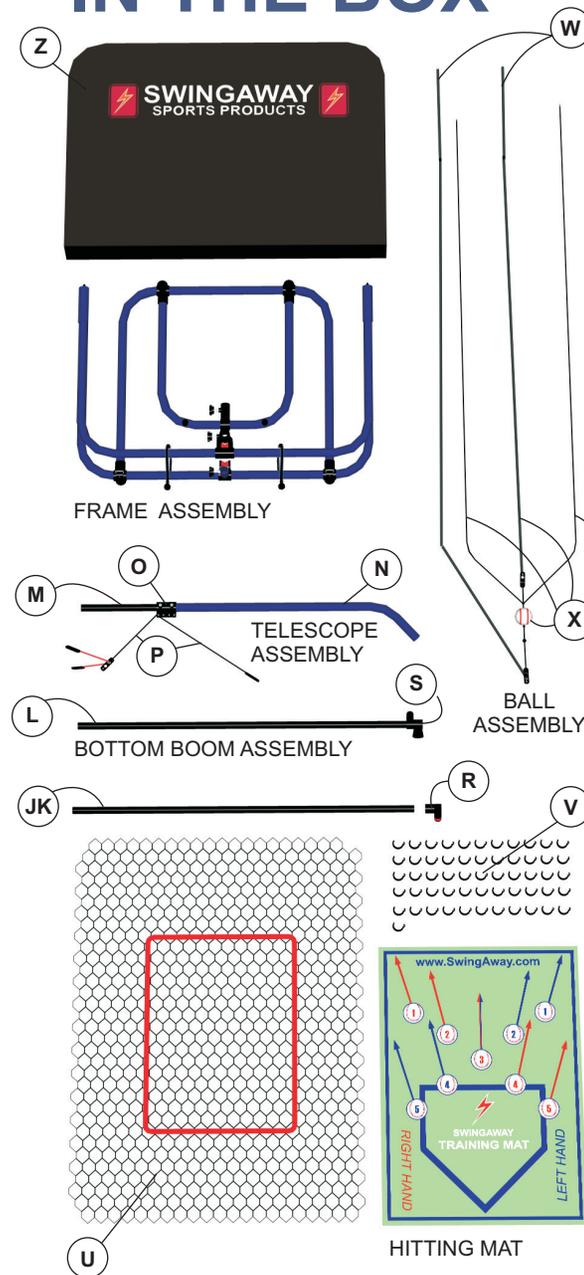

- FRAME ASSEMBLY**
- 9-1 TOP FRAME HOOP
 - 9-2 BOTTOM FRAME HOOP
 - 10-1 LARGE BASE HOOP
 - 10-2 SMALL BASE HOOP
 - E FOOT SPLIT FITTINGS (4)
 - H BASE HOOP FITTING
 - Q BOOM SUPPORT FITTING
 - T KNOBS (4)
 - Y MIDDLE FRAME PULLEY
 - AA BUNGEE BALLS (2)

- TELESCOPE ASSEMBLY**
- M INNER TELESCOPE
 - N OUTER TELESCOPE
 - O TELESCOPE FITTING
 - P HEIGHT ADJUST ROPE WITH CORD CONNECTORS (4)

- BALL ASSEMBLY**
- W BUNGEEES (3) (ONE EXTRA IS INCLUDED)
 - X BALL WITH TETHERS WITH CORD CONNECTORS (2)


- BOTTOM BOOM ASSEMBLY**
- L BOTTOM BOOM (53")
 - S BOTTOM BOOM PULLEY

- SEPARATE PARTS**
- JK TOP BOOM (53")
 - R TOP BOOM PULLEY
 - U NET AND RED ROPE
 - V NET CLIPS (56)
 - Z TRAVEL BAG

Not shown:
Allen wrench, manual

CORD CONNECTORS


CORD CONNECTORS ARE USED TO CONNECT CORDS AND BUNGEEES

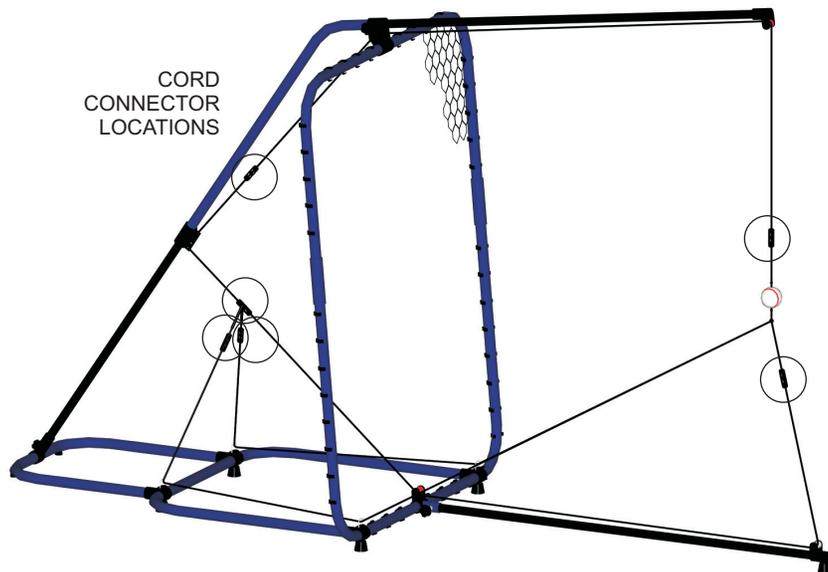

1 KNOT THE END OF THE CORD OR BUNGEE (LEAVE ABOUT AN INCH)



2 PUSH IT THROUGH THE LARGE HOLE IN THE CONNECTOR




3 LOCK IT IN BY PULLING THE CORD UP INTO THE SMALL HOLE



STEP 10

THREAD THE TETHERS (BOTH SIDES)

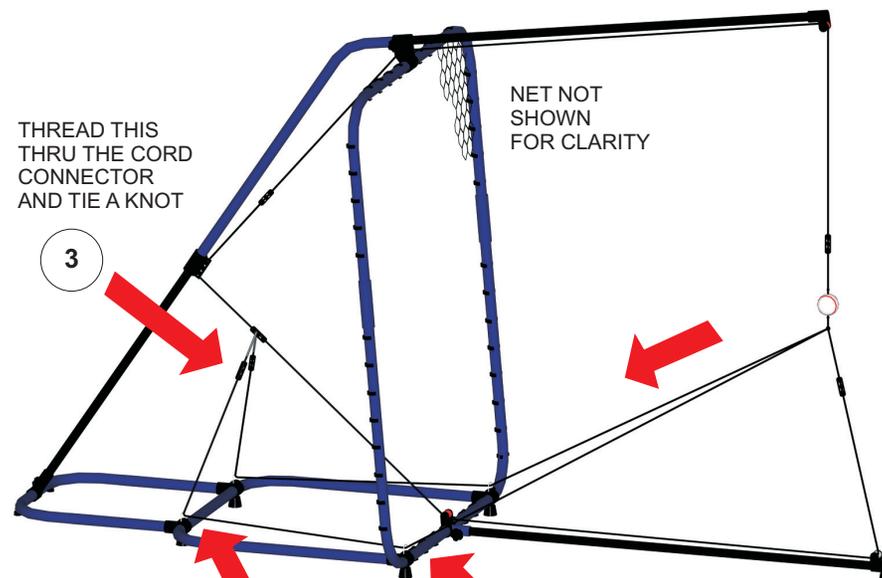

3

2

1


D-RING ON BASE

THREAD YOUR CORDS THRU THE METAL D-RINGS ON EACH SIDE




SEARCH "SWINGAWAY ASSEMBLY" FOR THE LATEST VIDEO INSTRUCTIONS

STEP 9 GET BALL ASSEMBLY AND THREAD THE BUNGEEES (BUNGEEES SHOULD BE TAUT)

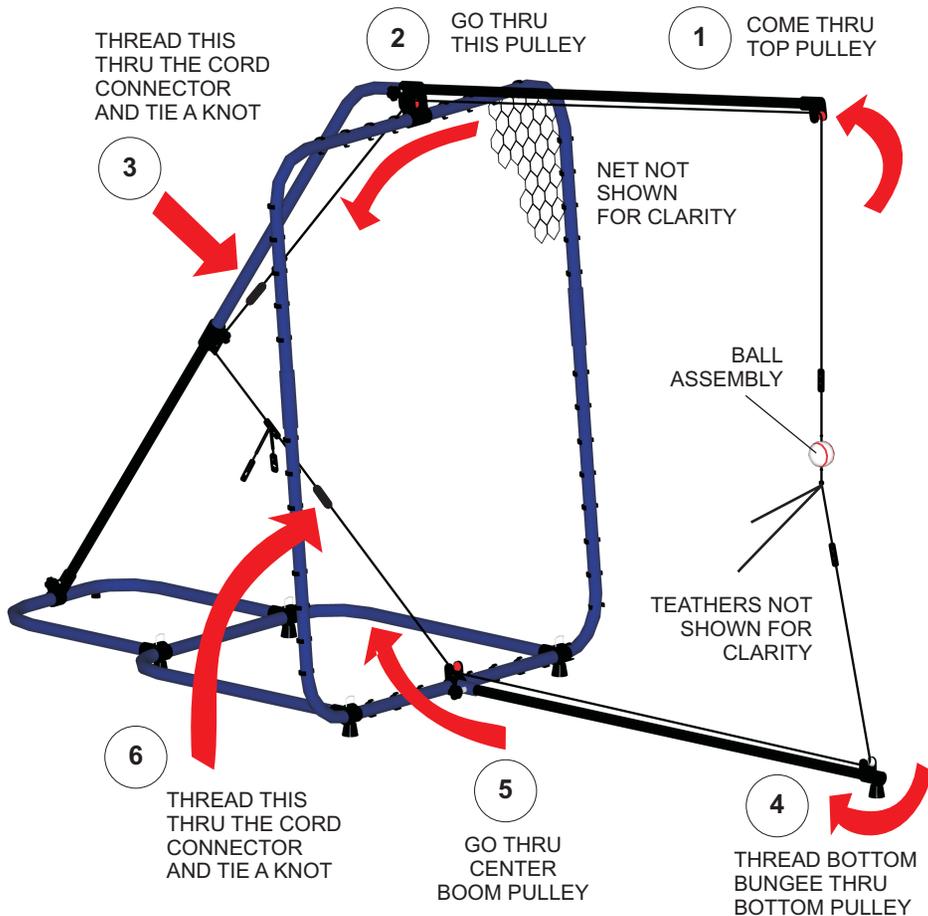


SEARCH "SWINGAWAY ASSEMBLY" FOR THE LATEST VIDEO INSTRUCTIONS

STEP 1 SEPARATE TUBING COMPONENTS ON THE FLOOR

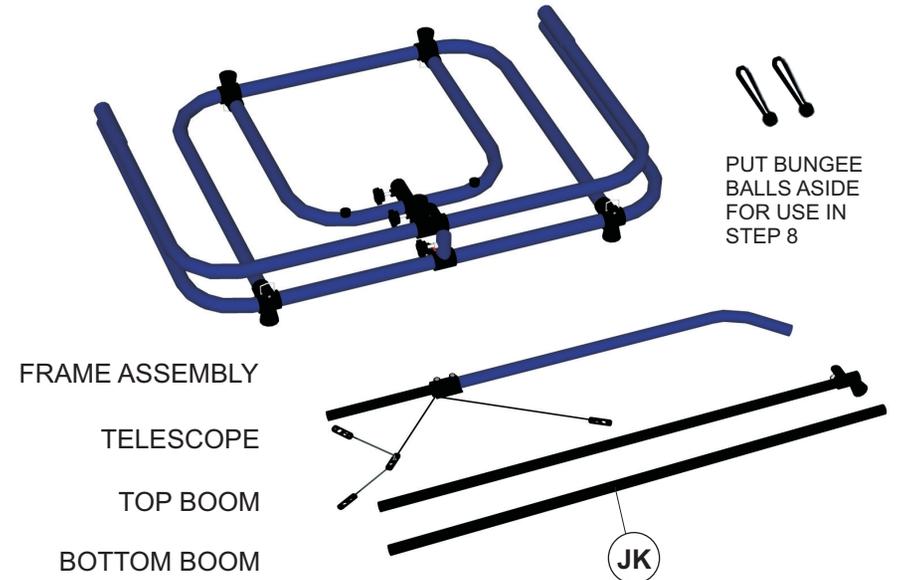


STEP 2 UN-FOLD THE SMALL BASE FRAME

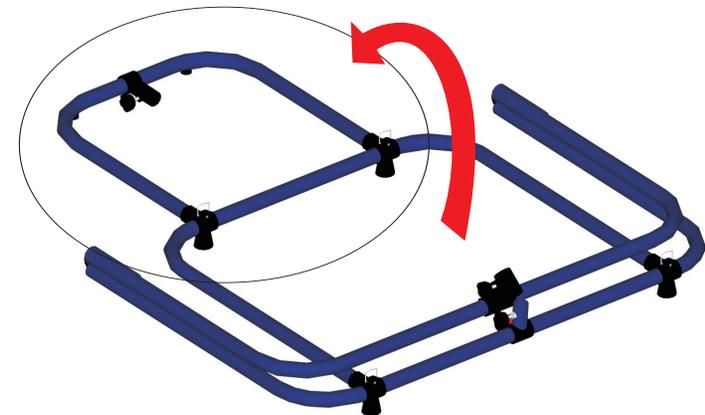

STEP 3


INSERT THE TELESCOPE
THE SMALL END, (BLACK END)
GOES INTO THE
BASE HOOP FITTING

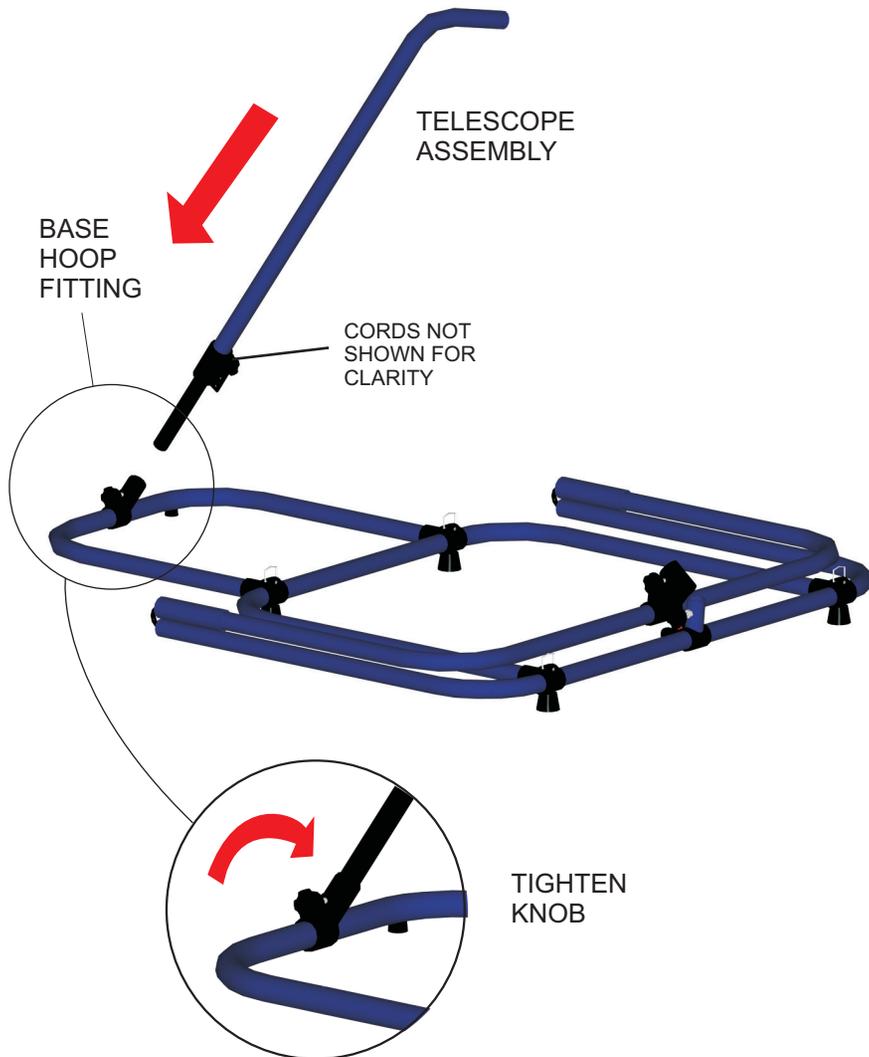

STEP 8

ATTACH THE NET WITH THE
NET CLIPS AND BUNGEE BALLS

- CLIP ON 4 **CORNERS** FIRST
- CLIP **EVERY OTHER** WEB ON TOP AND BOTTOM
- CLIP **EVERY** WEB DOWN THE SIDES (LEAVING ROOM FOR SLEEVES)

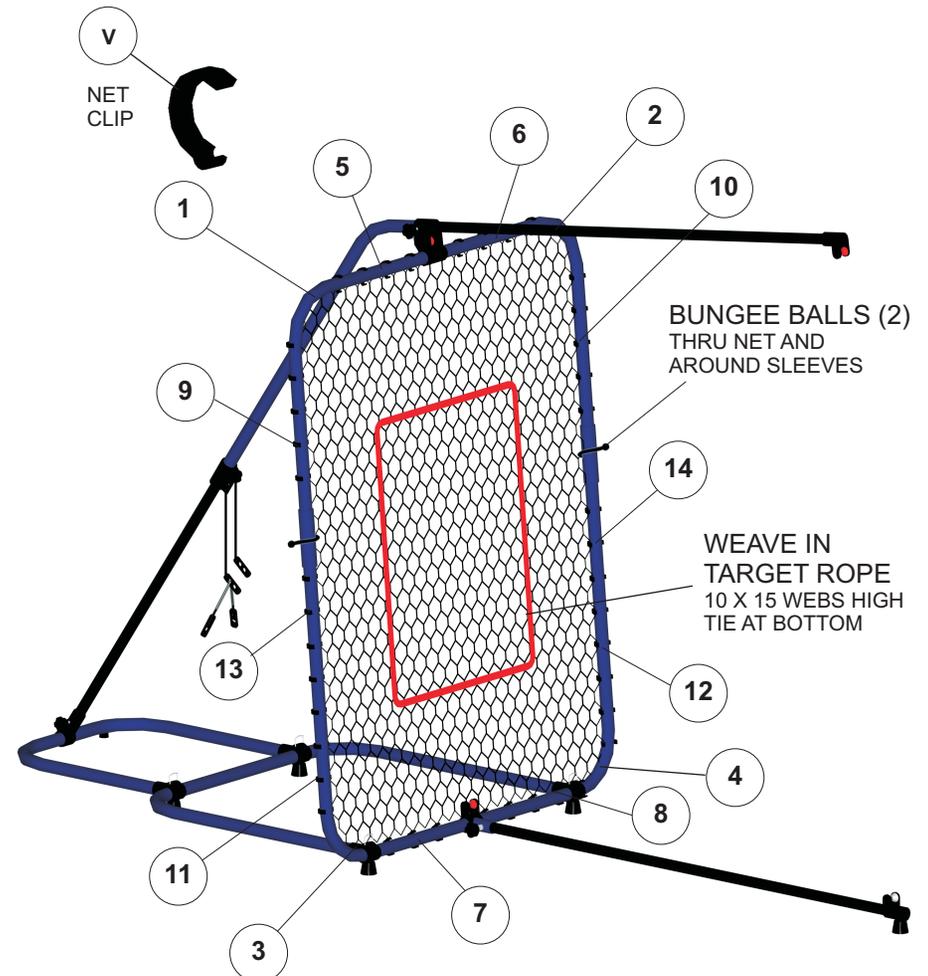


STEP 7

IMPORTANT! LEVEL YOUR MACHINE TIGHTEN TELESCOPE KNOB

WHILE ON A FLAT SURFACE, ADJUST THE FRAME BY
PULLING OR PUSHING THE TELESCOPING TUBES

MAKE SURE ALL THE FEET ARE TOUCHING THE GROUND


TIGHTEN THE KNOB ON THE MIDDLE TELESCOPE FITTING

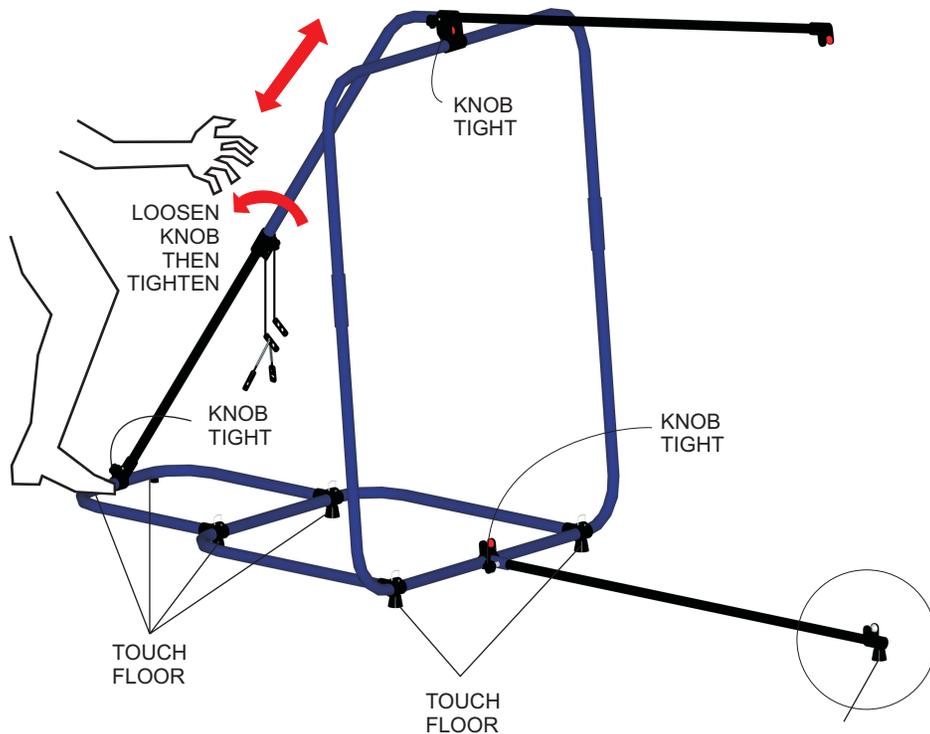

IMPORTANT:
BOTTOM BOOM FOOT
NEEDS TO BE ON THE FLOOR


STEP 4

INSERT THE OTHER END OF THE TELESCOPE INTO THE BOOM SUPPORT FITTING

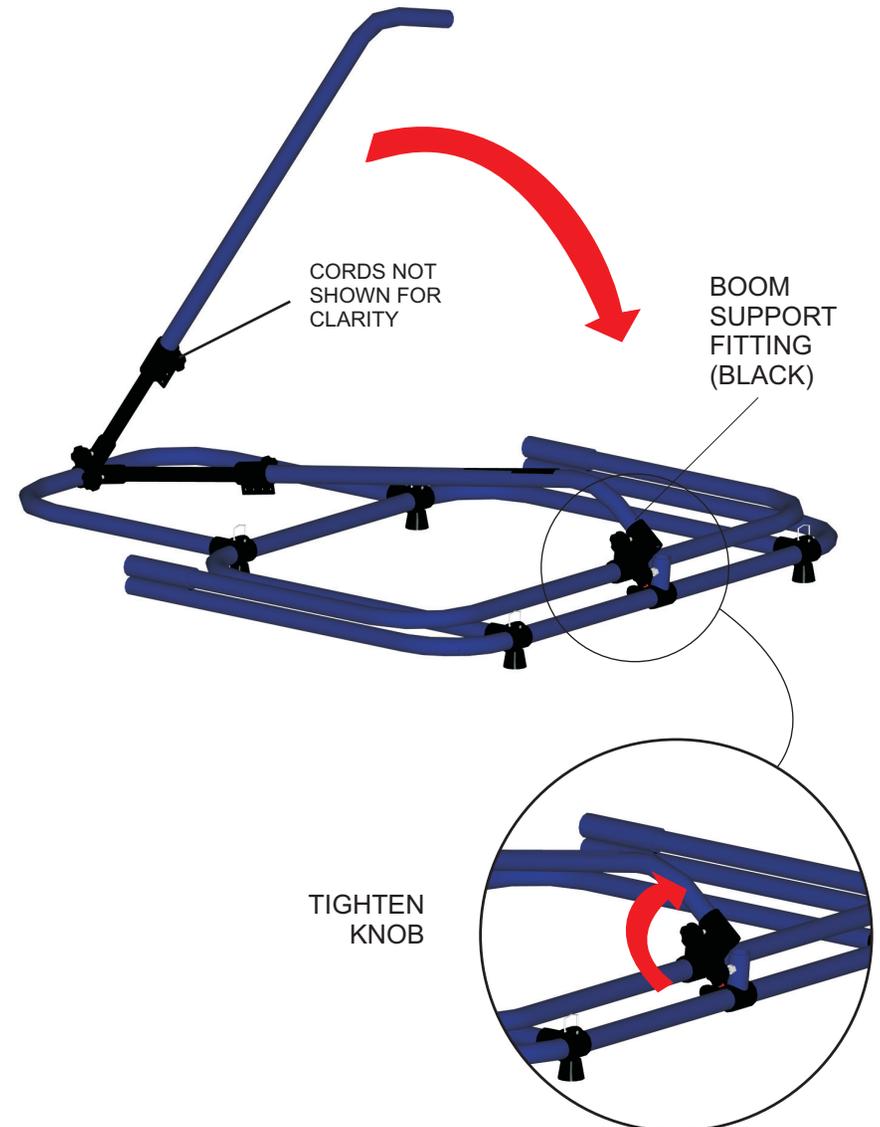

STEP 5

RAISE THE HITTING FRAME LOCK FRAME WITH SLEEVES

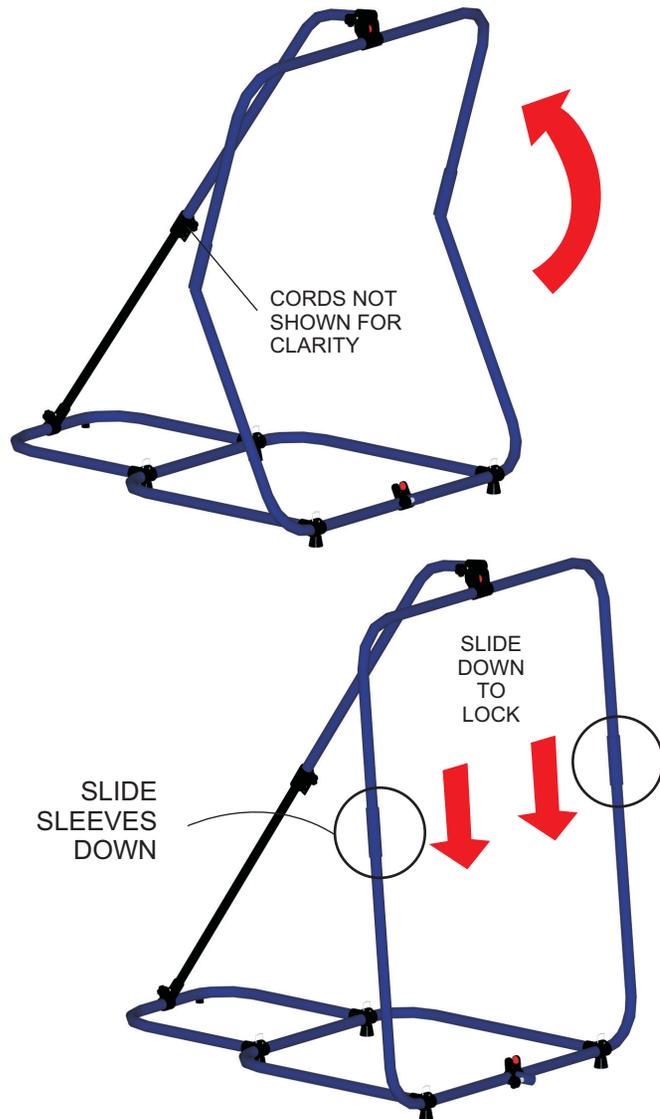

STEP 6

INSERT THE TOP AND BOTTOM BOOMS

