



REPLASTER & REMODEL GUIDE 2026

A guide for customers experiencing
a remodel/replaster construction
process.

2026

diamondpools.net



Table of **Contents**

- 1 About Us & Missions/Values
- 2 Pre-Construction
- 3 Demolition
- 4 Gunite
- 5 Tile/Coping/Accent Wall
- 6 Concrete
- 7 Plaster Info.
- 8 Traditional Smooth Plaster
- 9 Mini Pebble Plaster
- 10 Micro Pebble Plaster
- 11-12 Printable Pool Log
- 13 Automated Pool Covers
- 14-15 General Misc. & Warranty
- 16 Contact Info.
- 17 Pool Language

About Us

Trevor & Dani Curtis



Who We Are

We are a second-generation family owned and operated business that serves Solano County and the surrounding area. Trevor and Dani grew up and still reside in Vacaville. With over 20 years of personal experience, we love working with our neighbors and delivering quality construction close to home. Throughout the project you may see our three boys, Colton, TJ and Bennett, stop by the job site with their dad.

Mission & Values

It is our mission as a company to provide quality, personalized projects to our community. We work by the motto of *"where integrity meets craftsmanship"* so our customers can rest assured we will always do the right thing when it comes to your pool or spa project.

About Pre-Construction

- The anticipated start date listed on contracts is an approximate start date, which means substantial work is expected to begin within 20 days of the contracted start date; however, this does not include delays due to non-issuance of permits or weather delays.
- If there was any agreed upon work to begin prior to start of construction (like removal of shed/bushes, etc.) please ensure this work is done in a timely manner to prevent delay in excavation.
- For major remodels or existing pool tear outs, the day before demolition is to begin, a team member will set up a pump to drain the pool. It is the homeowner's responsibility to plug in the pump (instructions to be provided) before they go to bed, so the pool can be drained/nearly drained by the time the crew arrives in the morning.

About Demolition

- Demolition is the process of removing whatever is coming out of the pool/yard. It starts early (~7am).
- Please clear the accessway in which our crew will enter/exit the yard.
- As a courtesy, please consider notifying your immediate neighbors that demolition will be taking place so they have an opportunity to prepare for loud noise during the day.

About **Gunite**

- In the event we are changing the shape of the pool by adding gunite, please move all cars out of driveway and away from access way the night before gunite is schedule.
- Starts early for prep, but noise does not usually start for a few hours. Once it is time to start the shoot, it will be noisy for several hours.
- Starting the morning after gunite, start **watering down the pool with a hose 2-3 times per day, for 7 days** (more is best). This involves heavy saturation if watering with a hose or setting up an automatic sprinkler on a timer in the pool to keep gunite hydrated for a stronger cure. It is ok to walk on the gunite to perform this process.
- As the gunite dries, spider cracking may be present on the surface. This is normal, as the surface dries faster than the rest of the structure. These cracks do not go all the way through, and will not cause any structural issues when the pool is filled.

About Tile/Coping/Accent Walls

Tile

- The sooner you are able to choose a [tile](#) the smoother it will be – we can check for pricing and availability early and order anything that may need to be shipped in from afar. Typically, all 6" x 6" porcelain tiles are including the in tile material allotment price. Glass tiles and porcelain deco tiles are usually additional, a few hundred dollars. Other tile sizing is allowed, but may be subject to material/labor increase.
- If your contract does not include step tile or mosaics, this is the time to add them on. These will be installed close to the plaster date, but often these materials are speciality order and need time to come in. Delaying ordering mosaics/step tile until end of project may result in a delay in plastering your pool when anticipated.

Coping

- Some contracts specify coping surrounding the pool. Like tile, choosing a coping early in the process can help things move along as sometimes it must be transferred in from other states. You can explore coping options through [Aquabella](#), [Thompsons Building Supply](#), [Brickyard](#), or [NPT](#). Your contract will specify the price allotment for coping material as well as the size requirement – typically coping needs to be 12" x 24" x 3CM unless specified otherwise.

Raised Accent Wall

- Standard tile faced installation includes the front and the sides of the raised wall. Some customers want a [stone veneer finish](#) instead of tile, but keep in mind it may be subject to a change order if over the tile material allotment as outline in the contract. It is standard for the back of the raised wall to be unfinished. Most customers (including on our personal pool), leave it as is. Some customers choose to apply stucco or paint directly on it. If you would like to upgrade to have tile surrounding the entire wall, we can provide an estimate if not already done so.

About Concrete

- On day of concrete pour, another early morning, with a quiet start and a louder period during the pour. There will be several finishers who will hand trial the concrete with a broom or stamped finish. We can also add release powders if needed for stamped concrete, and umbrella holders in this stage so long as it is discussed beforehand.
- Starting 24 hours after concrete is poured, **start lightly watering down the concrete twice a day with a gentle mist.** This allows the concrete to cure more evenly and helps to reduce the color variation that is an inherent part of concrete, as well as minimizing cracking. If there is rain forecasted, check with Trevor regarding instructions for watering concrete.
- Depending on time of year, you can walk on concrete around 48 hours after the pour. Animals should not walk on the concrete for at least 7 days so avoid claw marks that may scrape the concrete. Children should also be closely supervised.

About Plaster

- Plaster may be subject to mottling and discoloration because it is a natural substance and it is an inherent characteristic of plaster product
 - [Check out this informative link](#)
 - Please read through the Plaster Disclaimer that was signed in the contract documents – this contains vital information regarding your plaster care.
- When traditional smooth plaster is finished, we will immediately begin filling the pool with water. In the event a water truck is needed (country properties usually), the homeowner is responsible for scheduling/providing the water truck(s). Based on how fast the pool is filling, it may require you to set an alarm to turn off the water during the night. It must fill constantly until it reaches the middle of the tile line (hence, waterline tile).
- For pebble applications, it is actually a two day process: install day and acid wash. The install day will look identical to traditional smooth plaster other than adding smoothed glass/pebbles onto surface. It is normal for the surface to look hazy and the pebble/glass to not “pop” at this time. The next day we will return to perform a polish and acid wash which strips that haze off and reveals the beautiful detail. When they are finished, they will immediately start filling the pool identical to instructions for traditional smooth plaster.
- Start-up procedures and instructions are included in the contract, but the pool chemical company should be well versed in new plaster care. The following two pages are the Pool Start Up Log. These need to be completed during the first 28 days of the plaster curing process. Printable copies may be provided at your request. You may store the completed logs personally or you can email/mail them to admin@diamondpools.net for us to store.
- We are responsible for getting pump(s) up and running when the pool is filled and to check for any above ground leaks in the equipment area. From there, a chemical service company will be required for the [2-week chemical start-up](#) of the plaster curing process, though a minimum of 28 days of very close plaster care is highly encouraged.
- ***EXTREMELY IMPORTANT*** during/after the plaster installation, it is the homeowners responsibility to ensure that no animals/children have access to the pool while filling. It presents a safety hazard for falling into pool/drowning, and any uneven footprints or paws may damage the plaster prior to the curing process. Please ensure that all safety devices are in working order – door alarms, fencing/gates (to prevent anyone from entering backyard unsupervised and accidents occurring), etc. For more information on pool owner safety, please check out [this link](#).

Traditional Smooth Plaster Colors

Check Out More
Photos of the
Finishes
[Here](#)



Blue Harbor



Deep Blue Harbor



Deep Seafoam Green



Deep Sky Blue

Finish Brand/Series:
Plasterscapes

Finish Brand/Series:
Plasterscapes

Finish Brand/Series:
Plasterscapes

Finish Brand/Series:
Plasterscapes



Deep Stormy Seas



Deep Turquoise



Seafoam Green



Sky Blue

Finish Brand/Series:
Plasterscapes

Finish Brand/Series:
Plasterscapes

Finish Brand/Series:
Plasterscapes

Finish Brand/Series:
Plasterscapes





Stormy Seas



Turquoise

Mini Pebble Plaster Colors

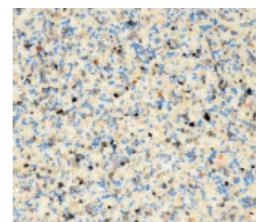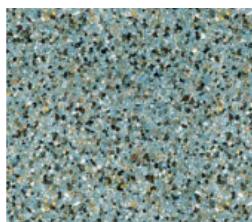



Aqua Blue Mini

Aqua Cool Mini

Aqua White Mini

Black Mini

Finish Brand/Series:
StoneScapes Mini Pebbles


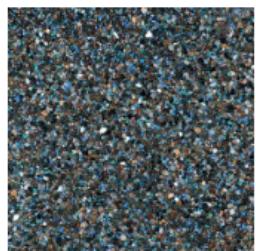
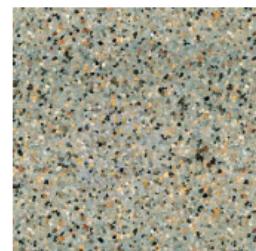


Cameroon Mini

Caribbean Blue Mini

French Gray Mini

Midnight Blue Mini

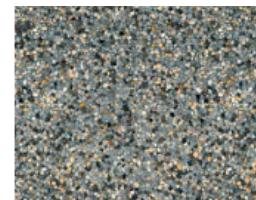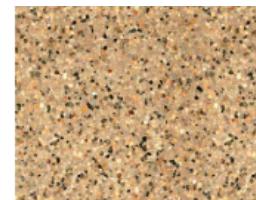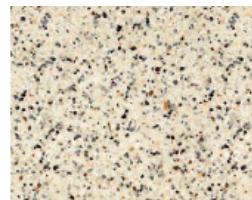

Salt and Pepper Mini

Sand Mini

Tahoe Blue Mini

Tropics Blue Mini

Finish Brand/Series:
StoneScapes Mini Pebbles




White Mini

Check Out More
Photos of the
Finishes
[Here](#)

Micro Pebble Plaster Colors



French Grey



Laguna




Lakeside




Midnight



Tahoe



Turquoise



White

[Check Out More](#)
[Photos of the](#)
[Finishes](#)
[Here](#)

DATE OF PLASTER _____

POOL START UP LOG

DATE OF FILL _____

START UP COMPANY/LICENSE #: _____

POST FILL DAY	TIME CHEMICALS ADDED	CHEMICALS ADDED AND AMOUNT	BRUSH TIME (1)	BRUSH TIME (2)	FILTER RUN PERIOD (HOURS)	ADDITIONAL BRUSHING/NOTES
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						
11						
12						
13						
14						

POOL START UP LOG

IF SALT POOL, DAY SALT ADDED AND AMOUNT -----

POST FILL DAY	TIME CHEMICALS ADDED	CHEMICALS ADDED AND AMOUNT	BRUSH TIME (1)	BRUSH TIME (2)	FILTER RUN PERIOD (HOURS)	ADDITIONAL BRUSHING/NOTES
15						
16						
17						
18						
19						
20						
21						
22						
23						
24						
25						
26						
27						
28						

Automated Pool Covers

Standard Lids: Available in Aluminum or Bronze finish. Not suitable for walking on. Can upgrade to metal walk on lid, which has added stainless steel brackets for support. Would recommend walk on tray lids with coping if considering a walk on lid.



Hidden Lid Option with Coping: Walk on lids to disguise cover housing. Coping stones rest on reinforced brackets - can be removed for cover access as needed. The lead bar and trays can be silver (as pictured) or black.



Fabric Colors: The fabric colors listed are as shown below. Samples can be viewed in person as requested. Most common color is Charcoal Gray (pictured to right).



Cover Color Options

Navy Blue

Royal Blue

Light Blue

Aqua

Green

Charcoal Gray

Gray

Tan

Mocha

Check out more
information
about covers

[Here](#) 13

About General Misc.

- Fencing Installation
 - Fencing/gate reinstallation by Buyer or by other professional company at Buyer's expense with completion prior to pre-plaster inspection. Common fence safety requirements include outward swinging (toward the street), self-closing (spring loaded), and interior (in the backyard) latch that is a minimum of 60" height from ground. If requested, Builder will alter gate to satisfy inspections/safety requirements at the cost of \$350.00 as a change order.
- Landscape repairs (sprinklers, drips, etc.).
 - Any sprinkler lines that we hit while excavating will be capped at the point they break to prevent water loss. Diamond Pools is not responsible for repairing sprinkler/drip lines, nor for any landscaping/concrete that is damaged/misplaced in the accessway or surrounding pool area. We will redirect any drainage towards appropriate lines.
- Change Orders
 - Please contact admin@diamondpools.net with any change order requests. Dani will type up the change order request and cost, and will send for esignature. Payment for change order items is due at the time of the completion of the change order.

About Warranty

- **Warranty/Post Construction Information**
 - After final inspection has been signed off and the final clean up completed, **Diamond Pools is available for any construction related questions you have by contacting admin@diamondpools.net.** Contacting Trevor directly via text will result in response delays; the fastest way to get assistance is by emailing our office at admin@diamondpools.net and we connect you with the best channel to meet your need.

Hayward Warranty/Registration
(lights, equipment):



Pentair Warranty/Registration
(lights, equipment):



Pool Cover Related Questions, Contact Pool Covers Inc. at (707) 864-6674



Contact



707-451-4748 - Office/Non Urgent Requests/Questions



707-624-6444 - Active Construction



trevor@diamondpools.net



www.diamondpools.net



4199 Suncatcher Ln, Vacaville, CA



admin@diamondpools.net - Post Construction/Warranty



Pool Language Help



Table of Contents

● Pool Shapes

- [Geometric - page 1](#)
- [Freeform - page 1](#)

● Depth Styles

- [Regular - page 2](#)
- [Sports Style - page 2](#)

● Bond Beam - page 3

● Spas

- [Raised Spas - page 3](#)
- [Inline Spas - page 4](#)

● Coping Styles

- [Travertine - page 4](#)
- [Flagstone - page 5](#)
- [Precast - page 5](#)
- [Cantilever - page 5](#)
- [Brick - page 6](#)

● Tile

- [Waterline Tile - page 6](#)
- [Step Tile - page 7](#)

● Accent Wall

- [Top Cap - page 7](#)
- [Faced and Sided - page 7](#)
- [Sheer Descent - page 8](#)

● Baja Shelf - page 8

● Plaster

- [Traditional Smooth - page 9](#)
- [Mini Pebble - page 9](#)
- [Micro Pebble/Micro Fusion - page 10](#)
- [Mottling - page 10](#)

● Other Water Features

- [Bubblers - page 11](#)
- [Deck Jets - page 11](#)
- [Magic Bowls - page 12](#)
- [Spill Over - page 13](#)
- [Vanishing Edge - page 14](#)

● MISC

- [Skimmer - page 15](#)
- [Autofill/Overflow Drain - page 15](#)

● Pool Shapes

Geometric refers to a more rectangular shaped pool. Although that is not always the case, some might have arcs on the ends. Typically it can be interpreted that if you “folded” the pool in half length wise, both halves would look the same.



Freeform is a lagoon or “kidney” shaped pool with multiple custom curves.




● Depth Styles

Regulardepth is the classic run from one side of the pool to the other gradually getting deeper to the deep end.




Pool Depth Profile

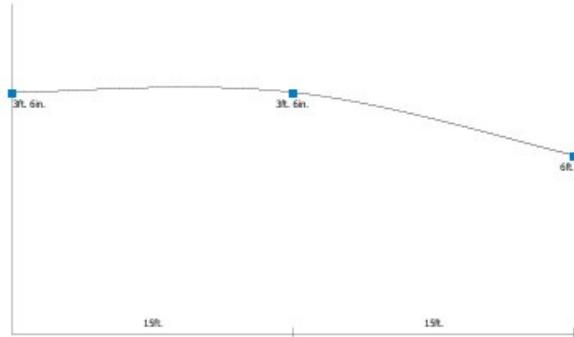

SportStyle is when the pool's deep end is in the middle of the pool with the shallow end being on the ends (or vice versa)



Pool Depth Profile

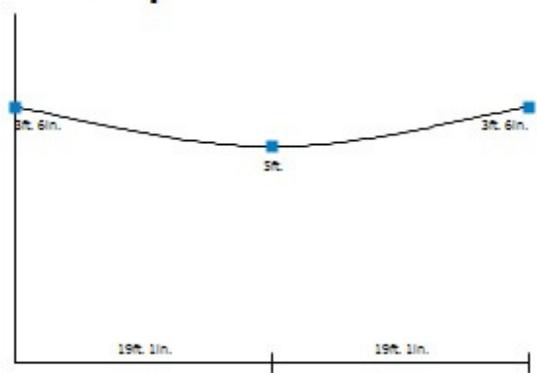

● Bond Beam

Bond Beam is a horizontal structural element used around the pool to provide reinforcement and stability, distributing loads and preventing cracking.



● Spas

Raised Spas are just like they sound raised up from the height of the pool, usually 18" but it can vary depending on preference. They generally have decorative stone around it to match landscaping and design style with the **coping** matching the pool **coping**. (see **coping** below)



Inline Spas are spas that are built at the same height as the pool, usually being inside of the pool but doesn't have to be. **Inline spas** can have coping along the top of it or tile depending on the design preference.



● Coping Styles

Travertine coping is a natural stone cut generally 24" wide x 12" from pool edge to decking. **Travertine** comes in many finishes more commonly with a bullnose finish (single or double) or Eased (modern) edge. This is a popular choice for rectangular pools.



Edge Guide



Double Bullnose



Single Bullnose



Eased Edge

Flagstone coping is similar to travertine but has a natural rock look with a natural edge. A popular choice for Freeform pools.




Precast coping is concrete that is poured into forms to give the appearance of **travertine** but is not stone, it is concrete.

Cantilever concrete is when the concrete deck is poured continuously and overhangs the edge of the pool bond beam.



Brick coping is typically 4" x 12" or 6" x 12" and can be made of different materials like travertine, traditional brick, or precast concrete like Belgard coping. This is useful for freeform pools, pools with tight corners, and for raised spas or accent walls.

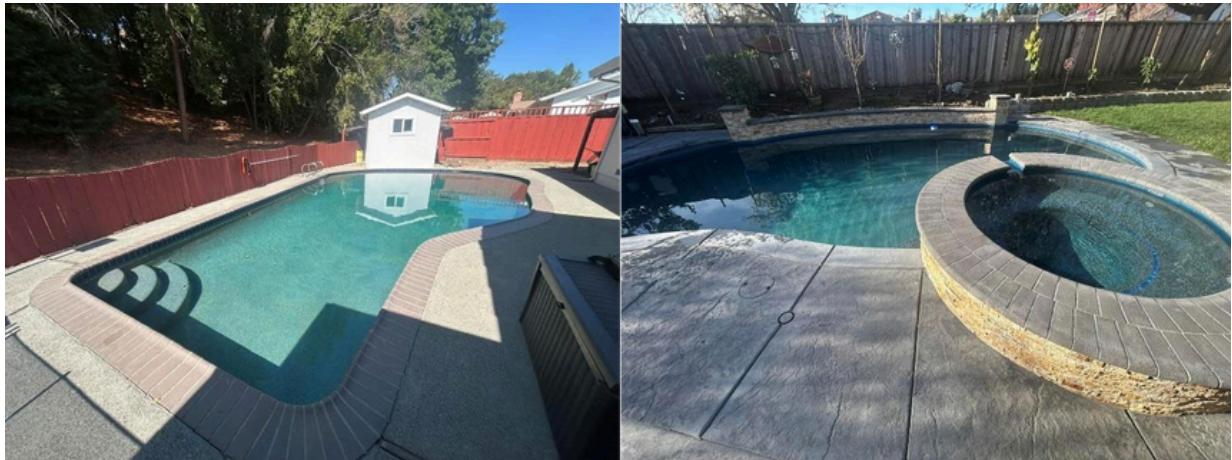

- **Tile**

Waterline tile refers to the tile along the waterline. It is the separation from the plaster to the decking or coping. The water level is supposed to be right in the middle of the waterline tile. It is required because plaster cannot remain exposed to air for long periods of time without damage. Standard sizing is 6"x6", but other sizes may be available, pricing may vary.




Step Tile is the tile that runs along the edge of steps and benches. When laid in a continuous row, 1"x1" or 1"x2" tiles are used. Alternatively, 6"x6" tiles can be cut into diamonds to form a row. **Step tile** is not required for residential pools.



● Accent Wall

Top Cap is the coping on top of the wall. It doesn't have to be the same coping as around the pool but in general it is the same to give a uniform look (see below **Faced and Sided** for pictures)

Faced and Sided refers to having tile or stone on the pool facing side of the wall along with the edge sides. The back of the wall (facing the fence) is usually left as exposed gunite. The tile can be the same as the **waterline tile** to give it a more uniform look or switch it up to have a more unique style.

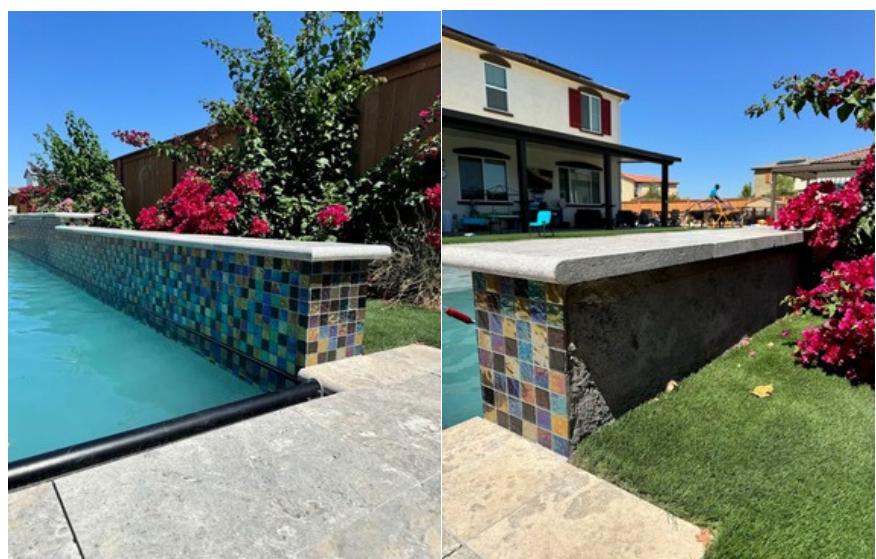


Sheer Descent is the water feature many refer to as a “waterfall”. **Sheer descent** comes standard in 3’ size but is available in 1’, 2’, 4’ and 6’ as well.



● **Baja Shelf**


Baja shelf otherwise known as “cabo shelf” “tanning ledge” “sun shelf” or “extended step” is the extra large step in the pool commonly used for young kids playing or pool lounge chairs. Options come with an umbrella sleeve in the middle of them for shade near the shallower end of the pool. **Baja shelves** range usually between 9” deep to 18” based on your preference.

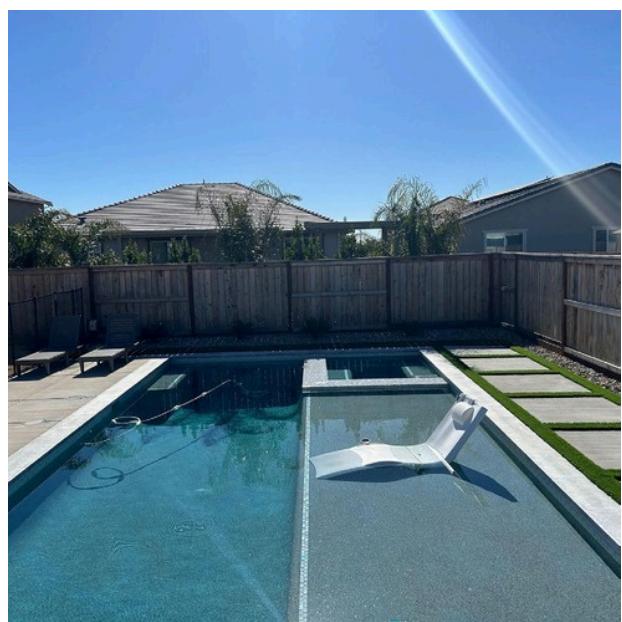

● Plaster

Traditional Smooth Plaster is the normal plaster you'll find in a community or public pool. It is the smoothest of all the plasters and comes in a variety of colors. **Traditional smooth plaster** generally lasts 7-10 years before needing to be refinished. **Mottling** is something


that happens with all plasters but it is most noticeable with colored **traditional smooth plaster**. (see below for **Mottling**)

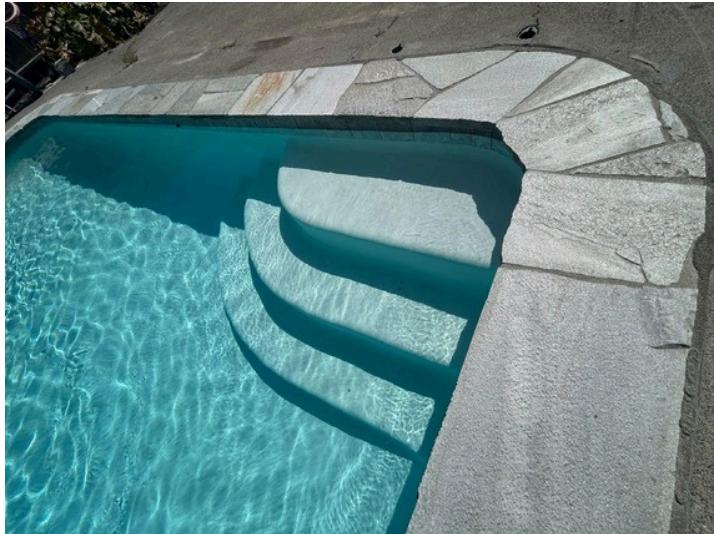

Mini Pebble Plaster commonly referred to as "Pebble Tec", is plaster mixed with polished stone or aggregates. "Pebble Tec" is merely one of the brand names and not the plaster itself. **Mini Pebble** is not the pebble finish from the 80s and 90s that was really rough on your feet. **Mini Pebble** is much smoother than the older pebble finish. While it is more expensive than **traditional smooth plaster**, its lifespan is doubled with proper care without needing to be replaced. **Mini Pebble** also comes in a wide variety of colors with different plaster colors and colored stone.



Micro Pebble Plaster or **Micro Fusion** is the next upgrade above mini pebble. With all the benefits of **mini pebble** it is the closest in smoothness to the **traditional smooth plaster**.

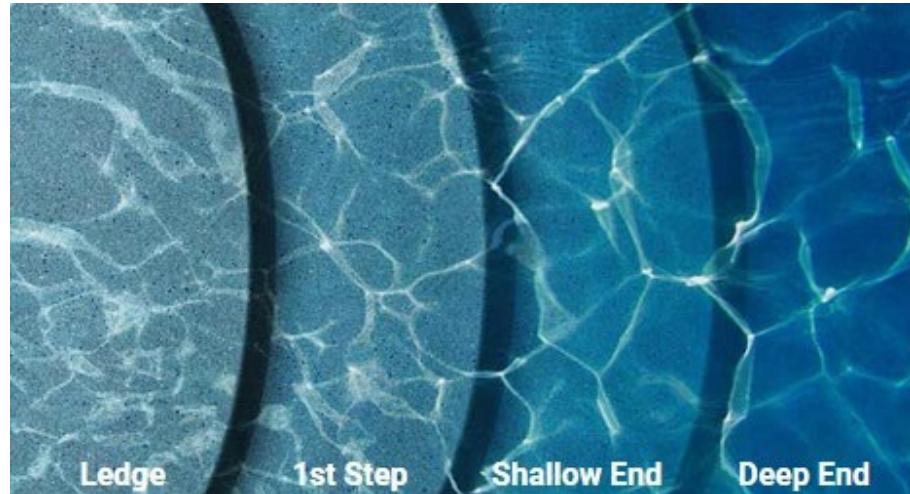

Mottling refers to the discoloration of the pool plaster, often appearing as blotchy areas of color. This is most notable in **traditional smooth plaster** with color dye added to it.


Although it does happen in **mini pebble** and **micro pebble plaster** as well it is not noticeable due to the stone and aggregate in the plaster.

Mottling is primarily an aesthetic concern and does not affect the pools durability.



● Other Water Features

Bubblers are a water feature that are usually placed in the surface of the baja shelf that spouts water over the surface of the water from 1"-6". These can come as regular **bubblers** or **LED bubblers** as an upgrade. **LED bubblers** are just bubblers with a changing light effect included with them.

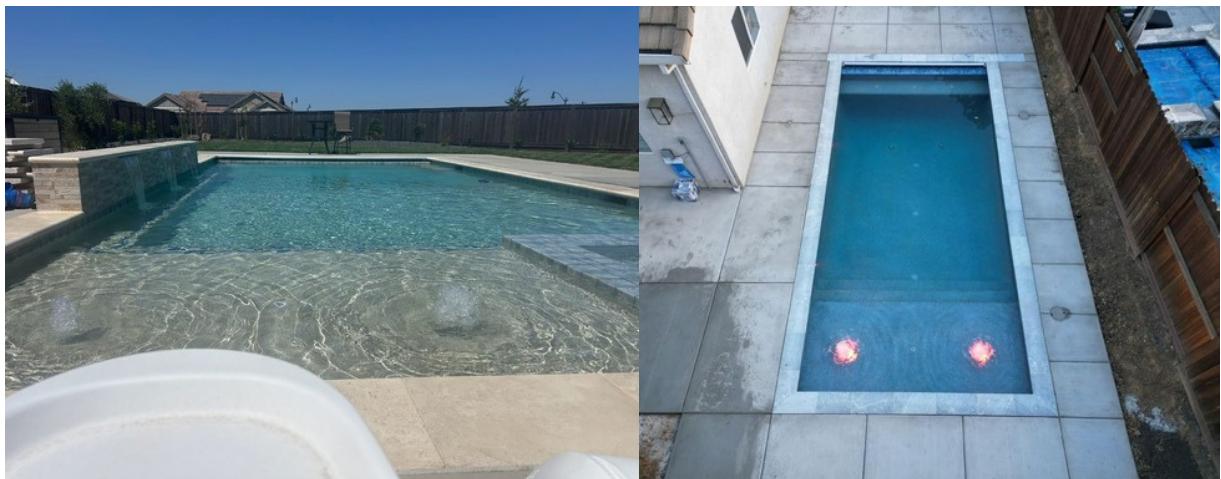

Deck Jets are fountains placed around the pool in the decking to shoot a small constant stream of water into the pool. They can be adjusted to swivel and have higher or lower arcs.




Magic Bowls are the bowls that sit on top of pillars and spill into the pool. Some options come with fire, requiring a gas line run to them, or LED lights which require electrical lines.



Spill Over is not so much a water feature as it is standard with spas when they are connected to a pool. The **spill over** is usually a small 1'-3' cut out of the edge of the spa that's tiled and lets water flow from the spa to the pool creating a "waterfall feature". These come standard with spas that are connected to pools because spas are generally not built with a **skimmer** basket (see **skimmer** below). The surface debris is pushed through the **spill over** into the pool to be caught by the pool **skimmer**. **Spill overs** can be covered with a coping piece or just left uncovered. Or for **inline spas** it is an option to **tile** the entire surface to make the entire pool edge a **spill over**.





Vanishing Edge is usually for pools built on the side of a hill to give the appearance the pool just drops off leaving a view into the valley. These require a water basin to catch any water that spills over the edge to pump it back into the pool.

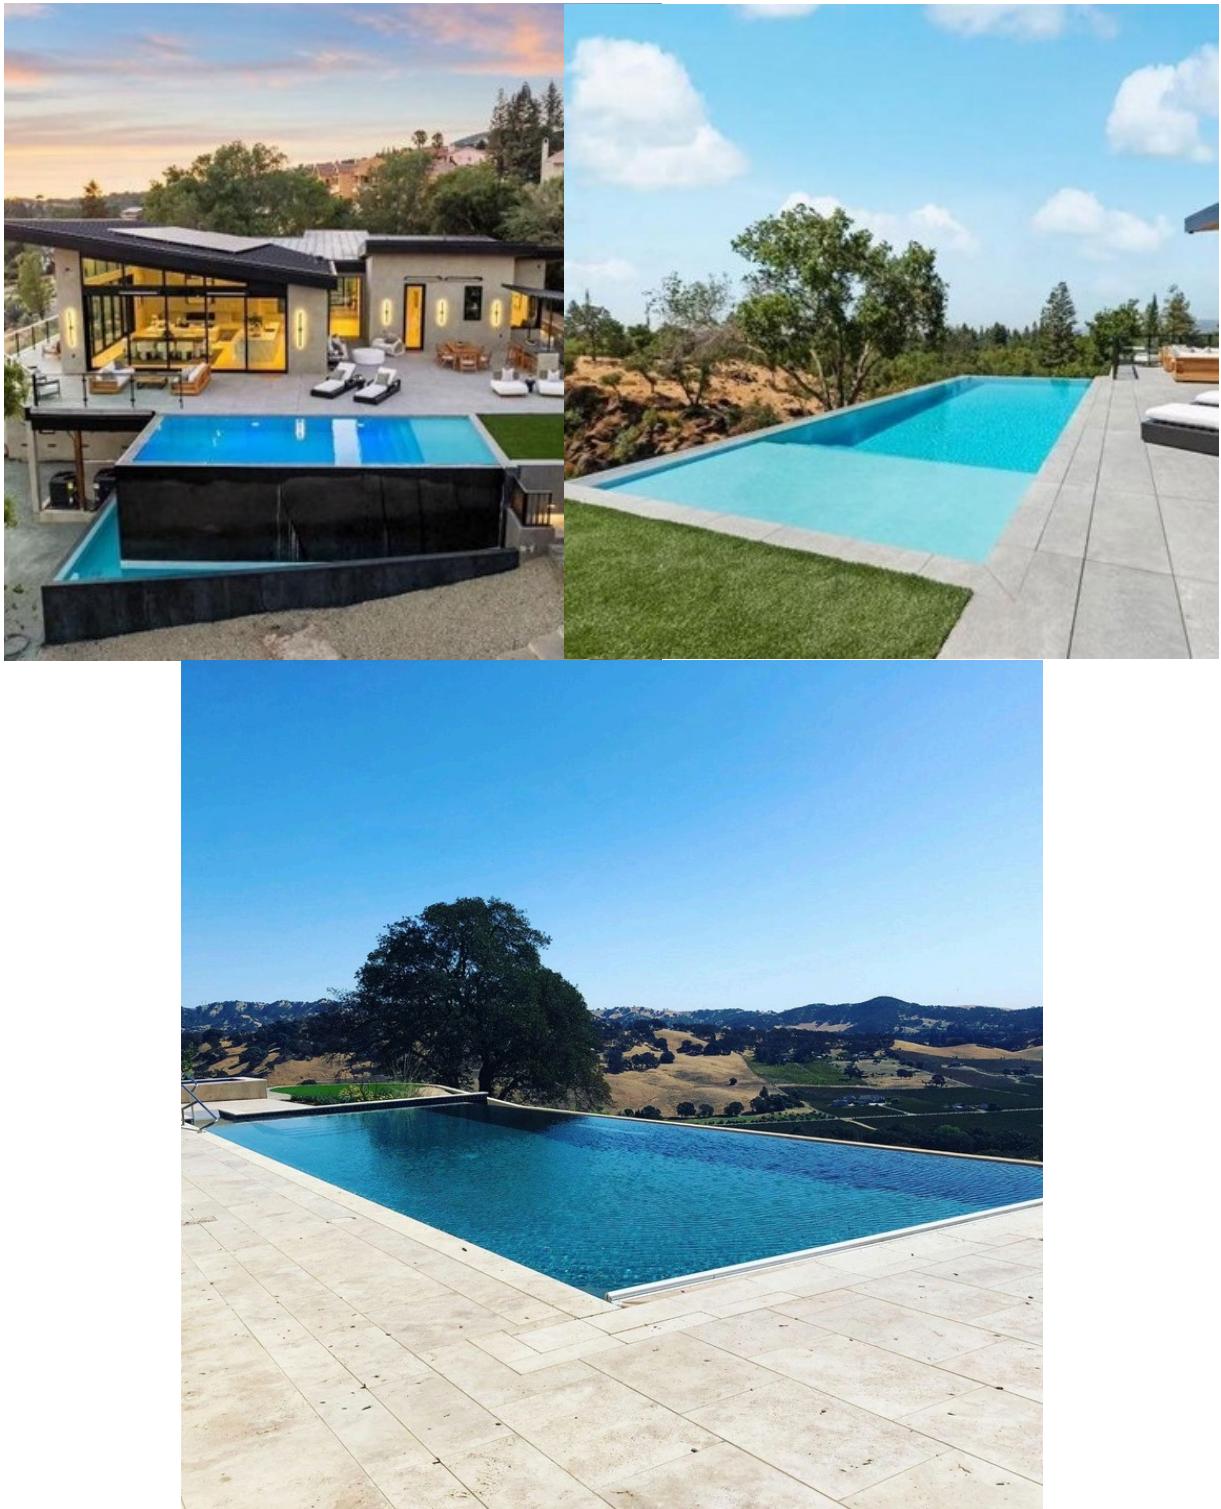

● MISC

Skimmer is the cut out in the side of the pool that traps floating debris into the basket inside the **skimmer** housing. The **skimmer** cover is about 2' from the pool edge and is laid flush with the decking where you can access the bucket to clean it. Larger pools usually have multiple skimmers. While most **skimmer** covers are plastic, there is an option to have a cover poured with concrete to match the surrounding decking.

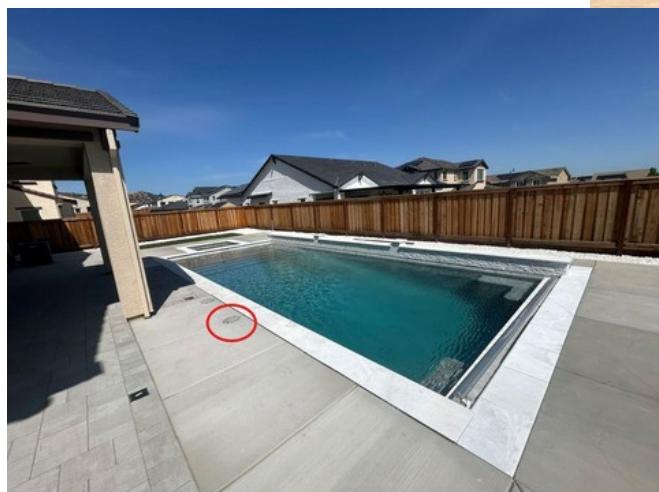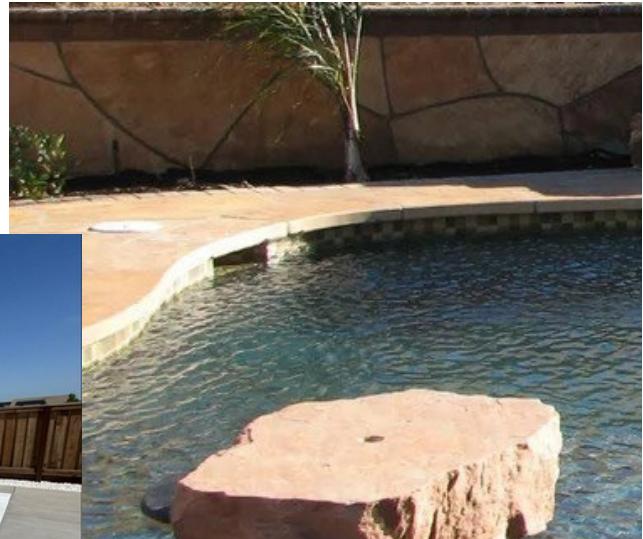

Autofill/Overflow Drain are installed in close proximity to the skimmer. The **Autofill** keeps the pool at the water level it is supposed to be at. It has a floating device that triggers on when the water level gets too low, similar to a toilet float. The **overflow drain** is a small hole in the side of the **autofill** housing that allows water to flow out to the drainage system when the water gets too high during heavy rains, preventing your pool from overflowing and potentially causing damage to your yard or house.

