





Lower Thickness & Weight



Resistances



Clean Floor





Product



Dust free Installaion



Resistant

Resistant





Modular



Glue



Less Dead Weight



Quick Installaion

Water Proof



Recyclable





Termite Resistant

Structure



UV Coating
Reduce fading to sun light near window or any other indoor environment

Wear LayerStrong wear-resistance for foot trac and make the surface scratch resistance.

Decor FilmA design layer of high-resolution photo of real wood that is reproduced with sophisticated printing techniques.

SPC Core Sheet primary layer of the SPC structure

Underlayment Effective sound reduction and cushioning incorporates amoisture barrier and mold repellent


















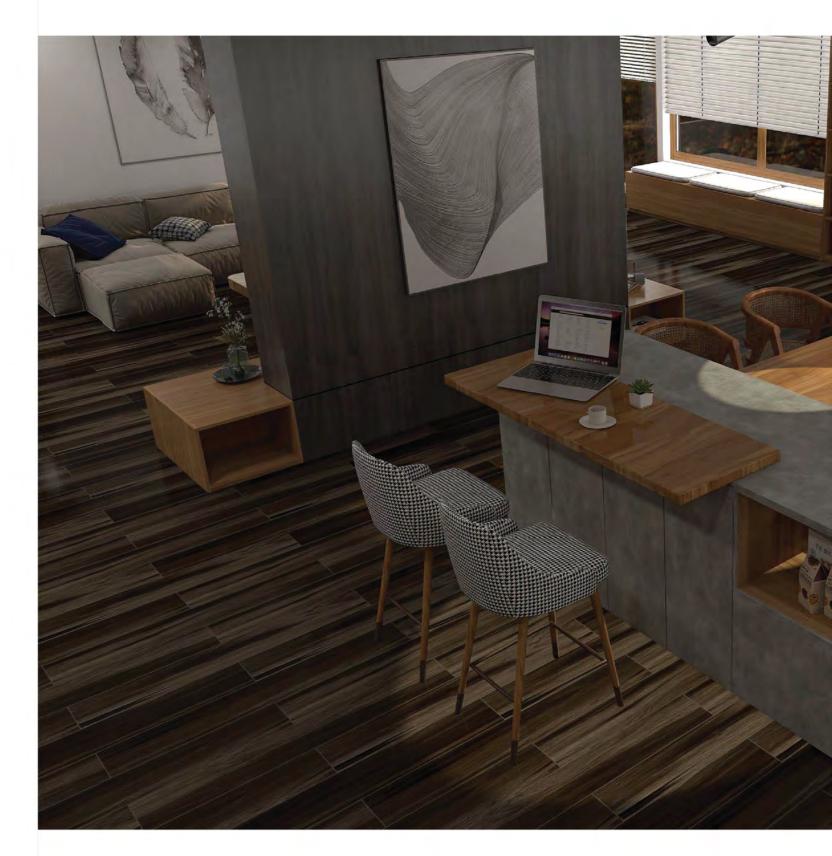







K1251 L -1 181 x 1220 x 5mm



Easy & Hassle Free Installation














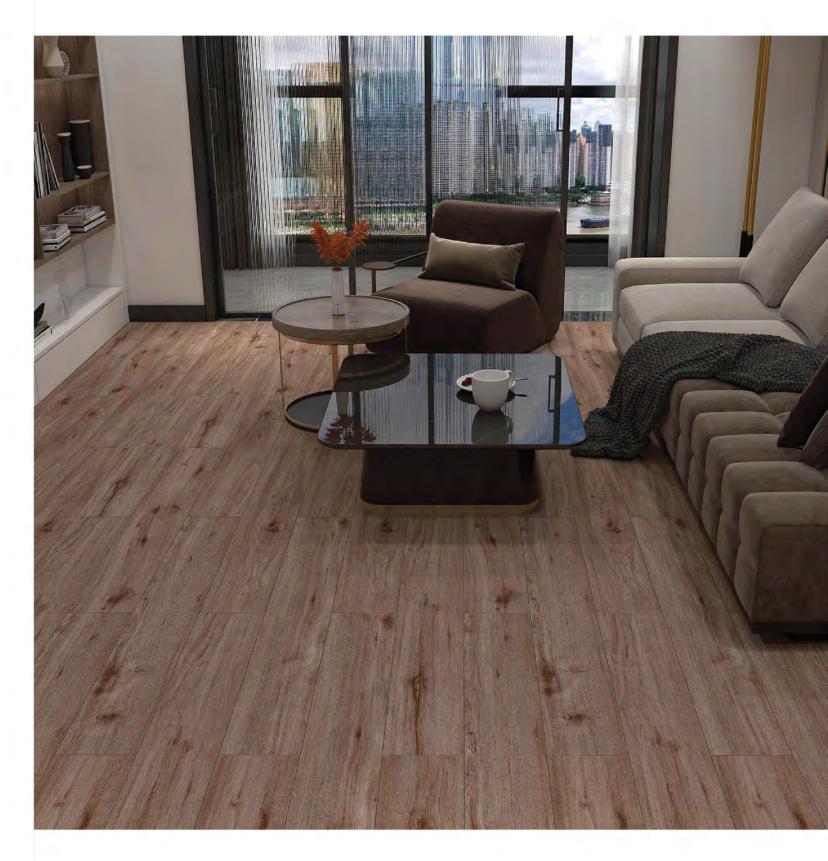







Opal K1255 -1 181 x 1220 x 5mm



Easy & Hassle Free Installation























Easy & Hassle Free Installation





















Easy & Hassle Free Installation





















Easy & Hassle Free Installation














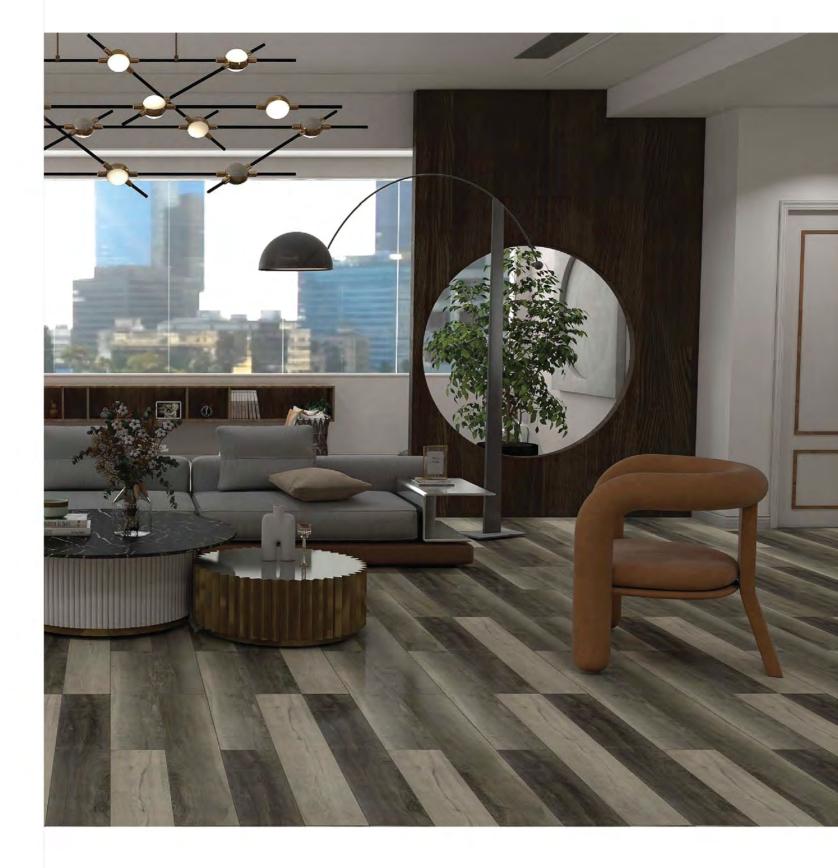







K1082L-24 181 x 1220 x 5mm



Easy & Hassle Free Installation





















K1047-10 181 x 1220 x 5mm



Easy & Hassle Free Installation























Easy & Hassle Free Installation














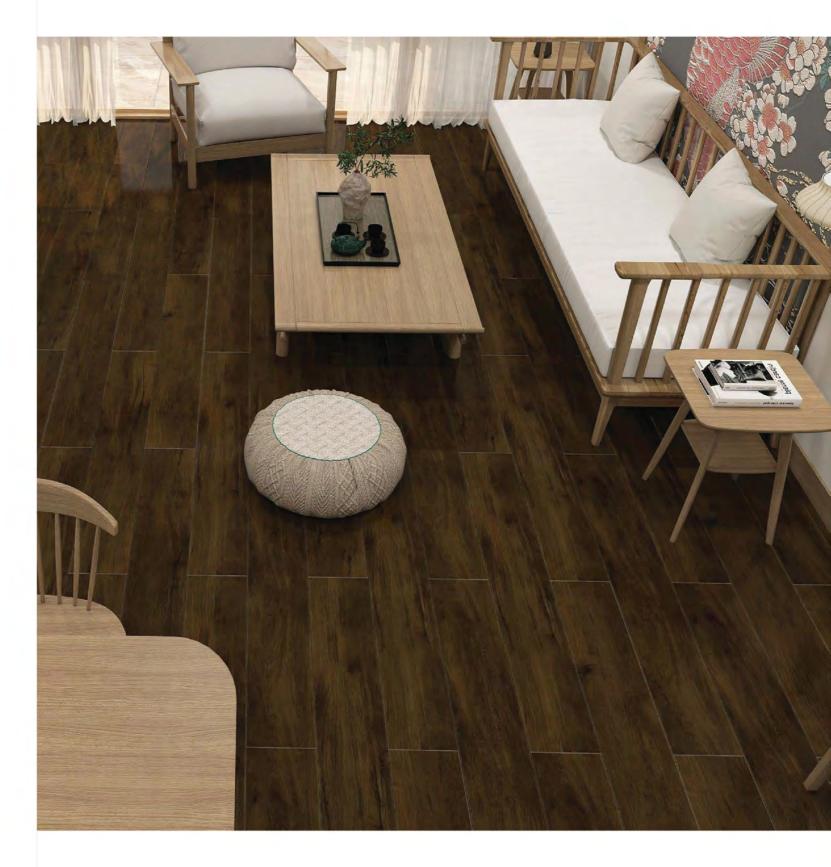








Easy & Hassle Free Installation





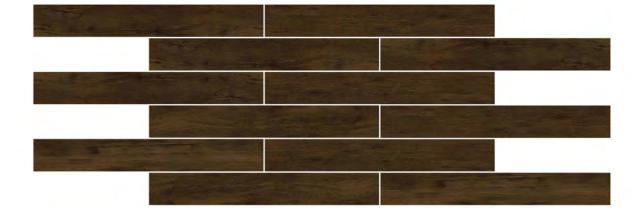




181 x 1220 x 5mm

F L





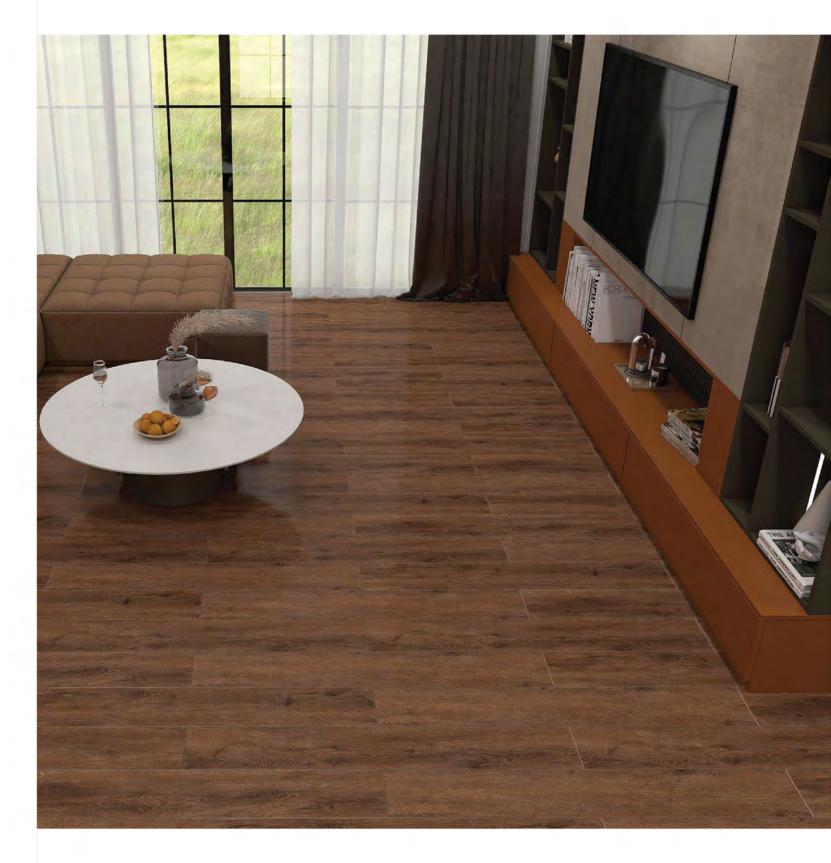







1021-7 181 x 1220 x 5mm



Easy & Hassle Free Installation














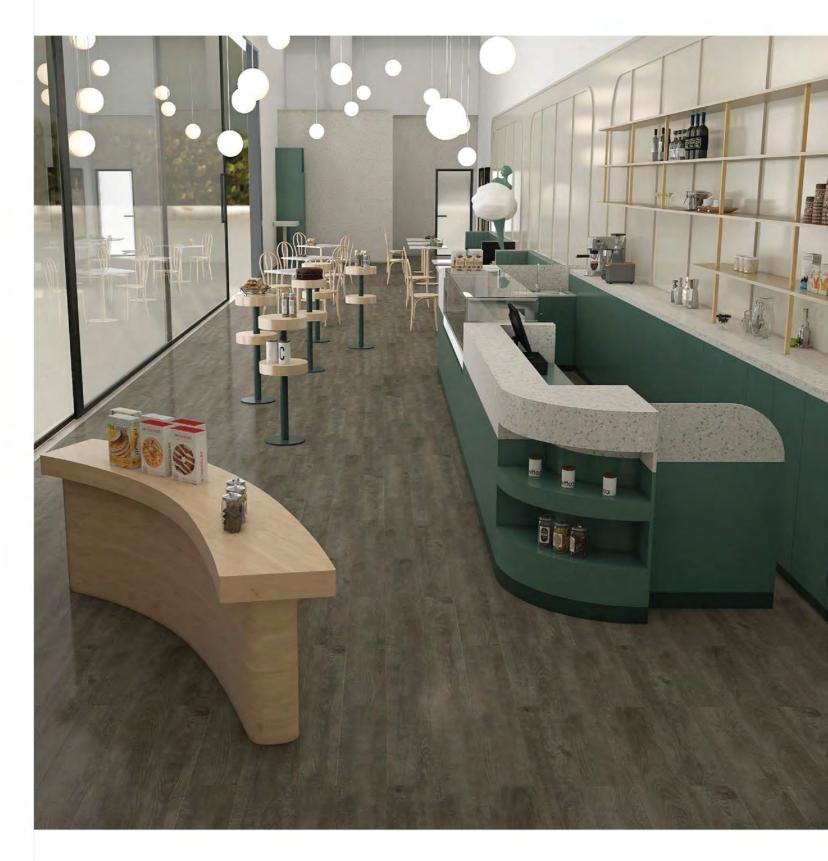







Bitola 1093-5 181 x 1220 x 5mm



Easy & Hassle Free Installation





















Easy & Hassle Free Installation














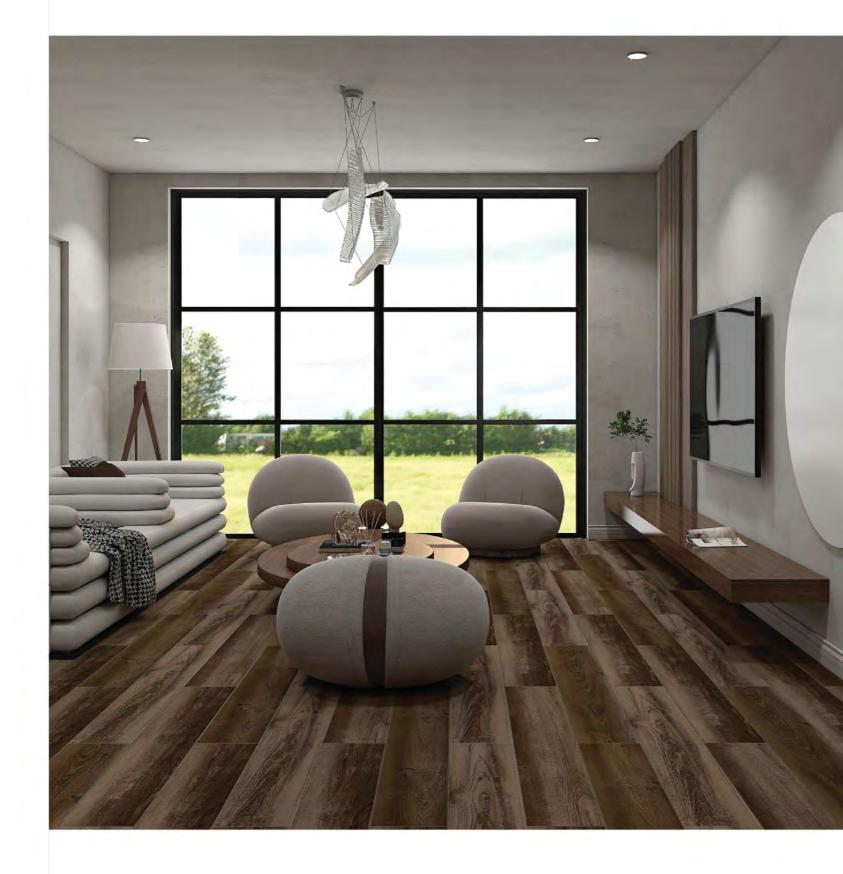







BD82151-10 181 x 1220 x 5mm



Easy & Hassle Free Installation














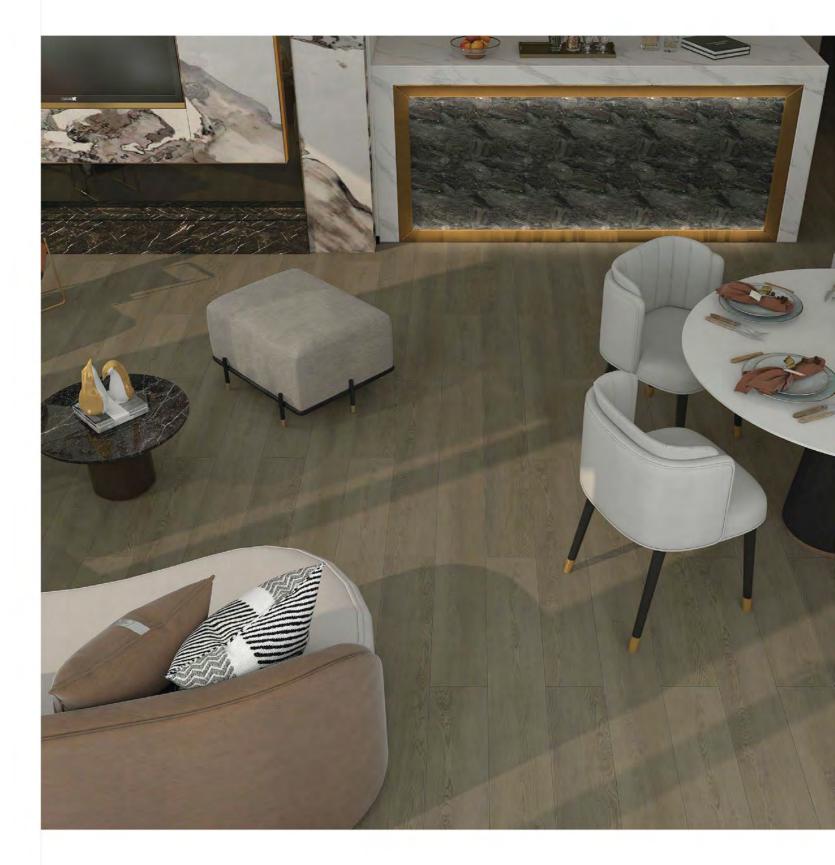







Easy & Hassle Free Installation















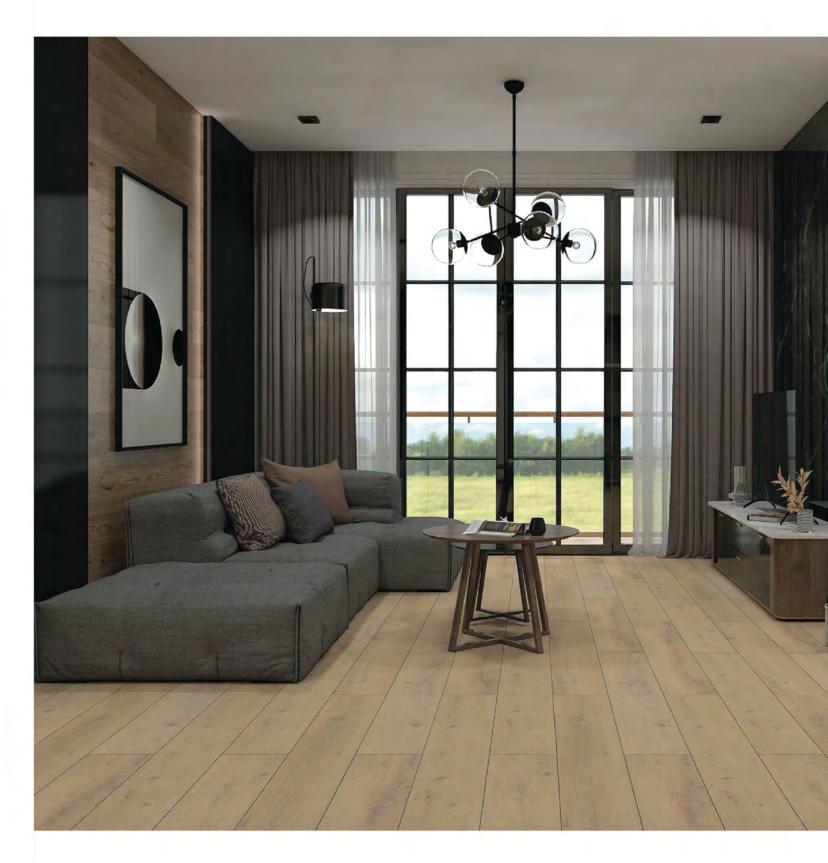





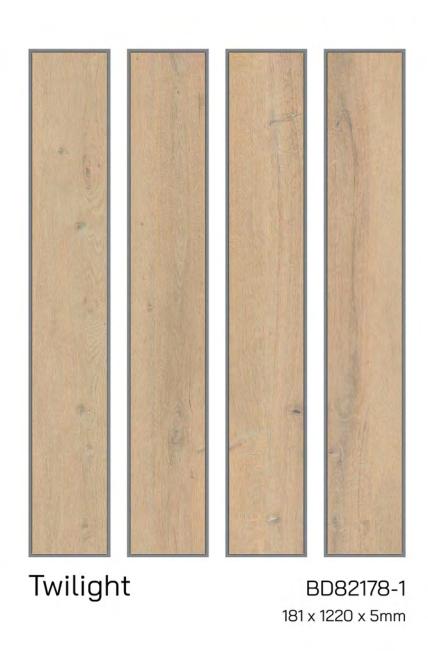


















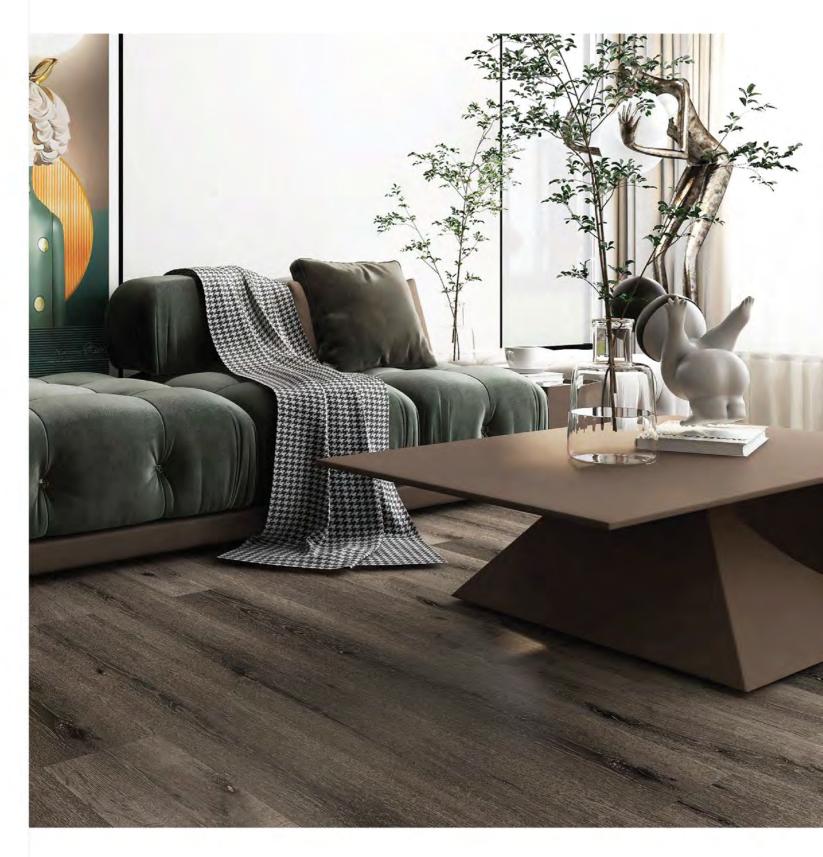







Clair

KBW1092L-31 181 x 1220 x 5mm



Easy & Hassle Free Installation














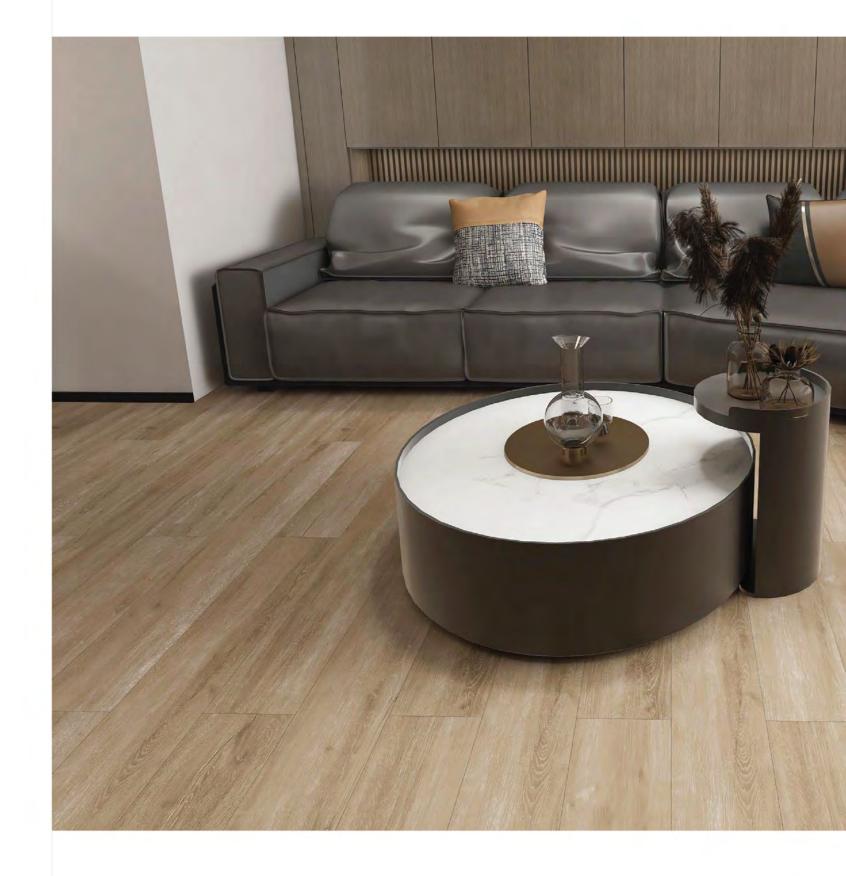









Easy & Hassle Free Installation














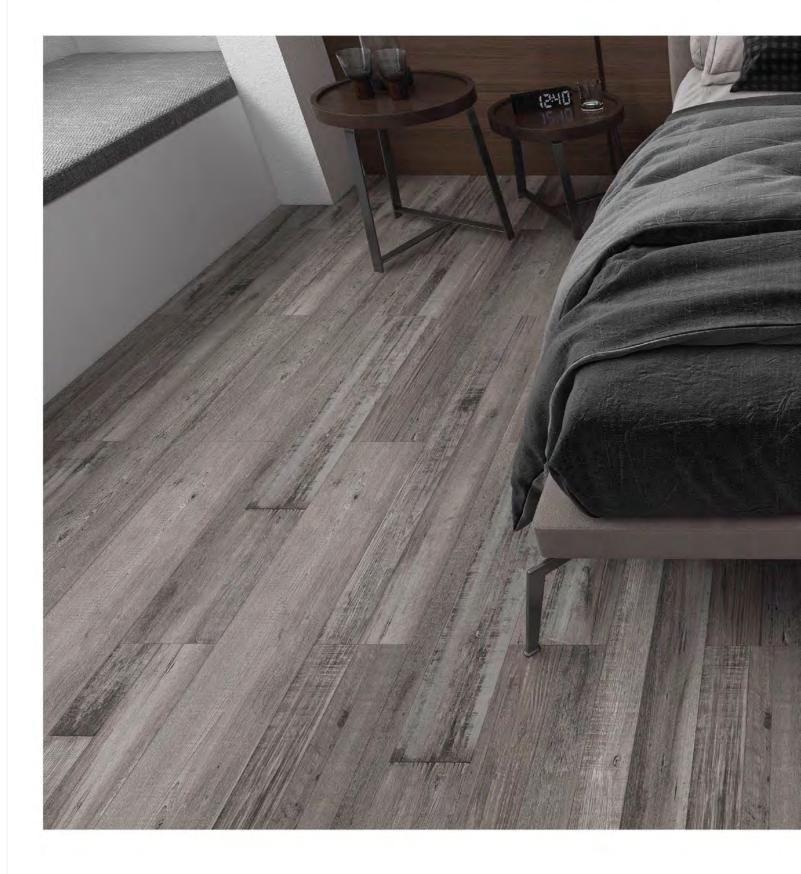







Neon

KBW1298-24 181 x 1220 x 5mm



Easy & Hassle Free Installation





















Trenz

VL88024L-007 181 x 1220 x 5mm



Easy & Hassle Free Installation














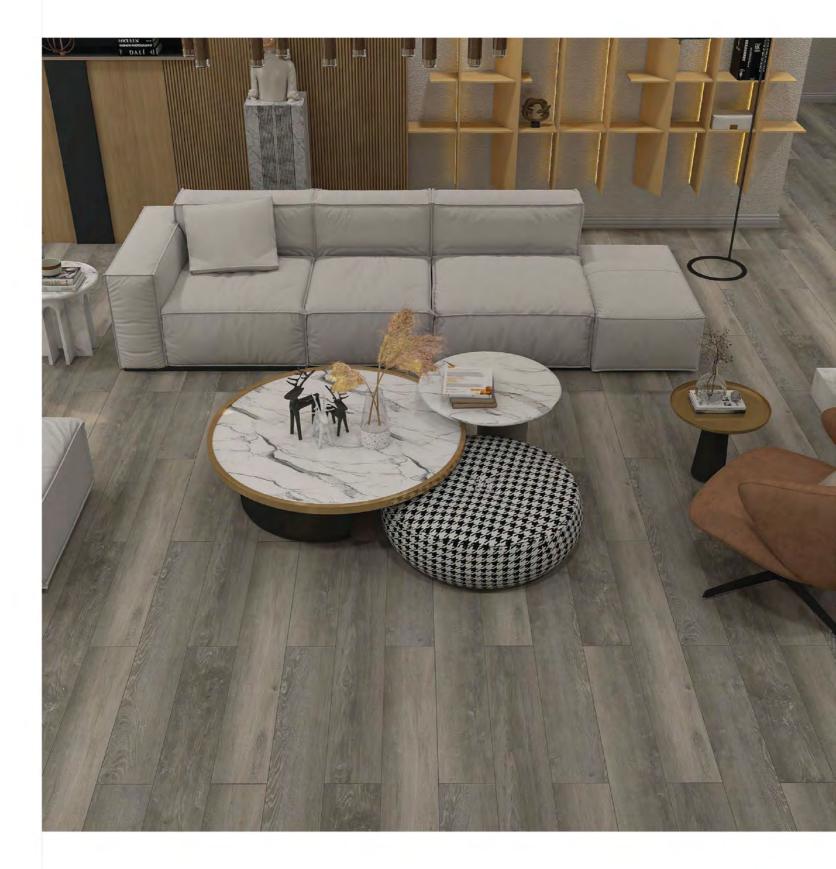







Easy & Hassle Free Installation












TECHNICAL SPECIFICATIONS

CHARACTERISTICS	PARTICULARS			
	EN	Result	ASTM	RESULT
Size	EN 427	Pass	ASTM F536	Pass
Overall Thickness	EN 428	Pass	ASTM F36	Pass
Wear Layer Thickness	EN 429	Pass	ASTM F410	Pass
Dimension Squareness	EN 427	Pass		
and Straightness		Squareness 0.18 mm		
		Straightness 0.07 mm		
Chemical Resistance	EN 423	Pass	ASTM F925, ASTM F1344	Pass
Colour Fastness to Artificial Light	EN20105:B02 Method A	Pass,≥Grade 6	ASTM F1515	Pass
Heat Stability by Colour Change			ASTM F1514	Pass
Castor Chair Suitability	EN 425	Pass		
Residual Indentation	EN 433	Pass, 0.06 mm	ASTM F1914, ASTM F970	Pass
Abrasion Group	EN 660-1/2	Group T	ASTM F510, ASTM D3384	Pass
Impact Resistance			ASTM F1265, ASTM D2632	Pass
Dimensional Stability	EN 434	Pass	ASTM F2199	Pass, 0.1%
Sound Reduction	ENISO717-2(ΔLw)	2 dB		
Flexibility	EN 435 Method A	Pass	ASTM F137	Pass
Slip Resistance	EN 13893	Class DS	ASTMD2047-93	Pass
Electrical Resistance	EN 1081 Method C	Pass	ASTM F150-06	Pass
Thermal Resistance	EN 12664	Pass		
Toxic Element Test	EN 71-3	Pass, Not Toxic,		
		Does not Contain Heavy		
		Metal and formaldehyde		
Behaviour to Fire	ENISO11925-2, EN13501-1	Bf1-S1	ASTM E6-48-06	Pass/Class
	EN ISO 9239-1			
Smoke Density			ASTM E662	Pass,<450

Product Size & Packing Details

Size	1220 X 181 mm	
Thickness	4.00 mm + 1.00 mm	
	IXPE underlayment	
Wearlayer	0,30 mm	
Packing Details	10 Planks/Box,	
	2.21 SQM/Box,	
	55 Box/Pallet	



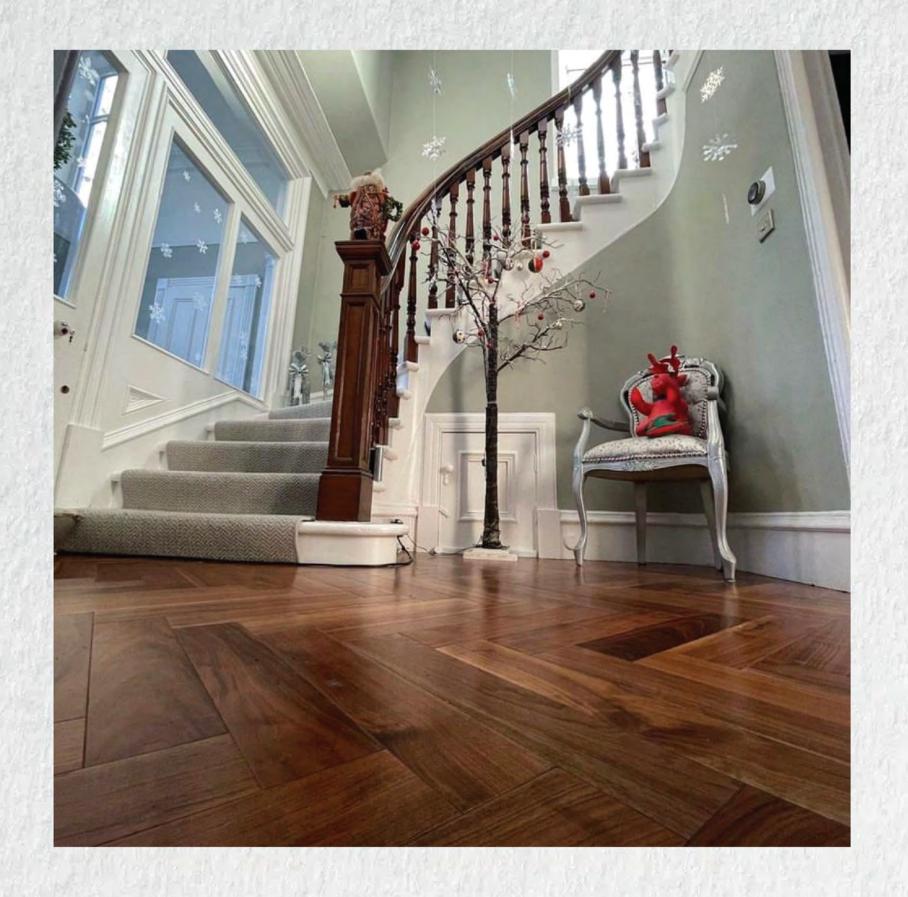





14314 58th Rd, Building D, Sturtevant, Wisconsin, 53177, USA



www.3dstonesandsurfaces.com



info@3dstonesandsurfaces.com

