



# Philips Ledinaire batten – For your everyday lighting jobs, easy to choose from the shelves and to install.

## Ledinaire batten BN045C

The Ledinaire batten (BN045CC) range contains a selection of off-the-shelf batten LED luminaires that comes with the high Philips quality levels at a competitive price. Reliable, energy efficient and affordable. Ledinaire enables, simple and flexible installation, including BESA fixing option and an optional emergency pack accessory.

### Benefits

- Philips quality and reliability
- Energy saving
- Compact design
- Easy and flexible installation

### Features

- Emergency pack as optional accessory
- Mounting accessories included
- Available in 1.2m, 1.5m, 1.8m length
- BESA fixing possible

# Ledinaire batten BN045C

## Application

- General lighting
- Storage rooms
- Cove lighting

## Versions






Ledinaire batten, BN045C

Ledinaire batten, BN045C


Ledinaire batten, BN045C

## Dimensional drawing

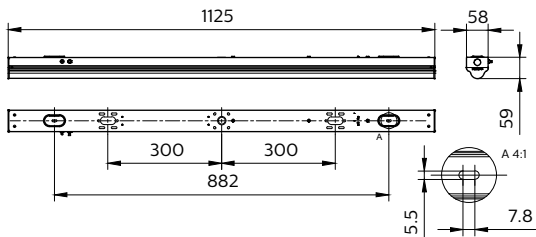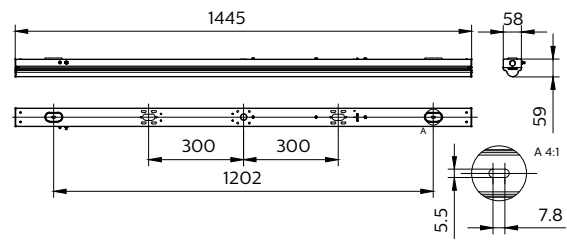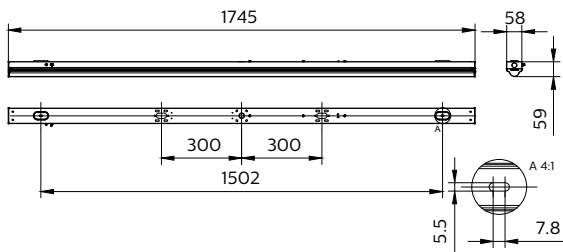


# Ledinaire batten BN045C

## Product details



Ledinaire batten, BN045C,  
emergency indicator position



Ledinaire batten, BN045C, open  
view



Ledinaire batten, BN045C,  
emergency pack position




Ledinaire batten, BN045C, wiring




Ledinaire batten, BN045C,  
emergency pack ready



Ledinaire batten, BN045C,  
emergency pack position



Ledinaire batten, BN045C, back  
view



Ledinaire batten, BN045C,  
emergency indicator position

# Ledinaire batten BN045C

## General Information

CE mark	CE mark
Driver included	Yes
ENEC mark	-
Flammability mark	For mounting on normally flammable surfaces
Glow-wire test	Temperature 650 °C, duration 30 s
Light source replaceable	No
Number of gear units	1 unit
Service tag	No

## Light Technical

Correlated Color Temperature (Nom)	4000 K
Color rendering index (CRI)	>80
Optic type	Beam angle 120°
Flickering value (PstLM)	1
Stroboscopic effect value (SVM)	1.6

## Operating and Electrical

Input Voltage	220-240 V
Line Frequency	50 or 60 Hz

## Temperature

Ambient temperature range	-20 to +40 °C
---------------------------	---------------

## Controls and Dimming

Dimmable	No
----------	----

## Mechanical and Housing

Housing Color	White
---------------	-------

## Approval and Application

Protection class IEC	Safety class I
Mech. impact protection code	IK02
Ingress protection code	IP20

## Initial Performance (IEC Compliant)

Initial chromaticity	(0.38, 0.38) SDCM $\leq$ 5
Luminous flux tolerance	+/-10%

## Application Conditions

Suitable for random switching	Yes
-------------------------------	-----

## Light Technical

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux
911401806385	BN045C 25S/840 PSU L1200	119 lm/W	2,500 lumen
911401806485	BN045C 48S/840 PSU L1200	120 lm/W	4,800 lumen
911401806785	BN045C 43S/840 PSU L1800	119 lm/W	4,300 lumen
911401806885	BN045C 78S/840 PSU L1800	120 lm/W	7,800 lumen
911401806585	BN045C 35S/840 PSU L1500	121 lm/W	3,500 lumen
911401806685	BN045C 60S/840 PSU L1500	120 lm/W	6,000 lumen

## Operating and Electrical

Order Code	Full Product Name	Power Consumption
911401806385	BN045C 25S/840 PSU L1200	21 W
911401806485	BN045C 48S/840 PSU L1200	40 W
911401806785	BN045C 43S/840 PSU L1800	36 W

Order Code	Full Product Name	Power Consumption
911401806885	BN045C 78S/840 PSU L1800	65 W
911401806585	BN045C 35S/840 PSU L1500	29 W
911401806685	BN045C 60S/840 PSU L1500	50 W

## Ledinaire batten BN045C

