




Lighting-Power-Control

EYELID ROUND BULKHEAD

FEATURES

- Die-cast aluminium base
- Side and top conduit entries
- IP65 rated
- Security screw option
- Integral sensor options
- Emergency versions including self test, DALI and DATA2
- Addressable central battery version available for the TM-CBA

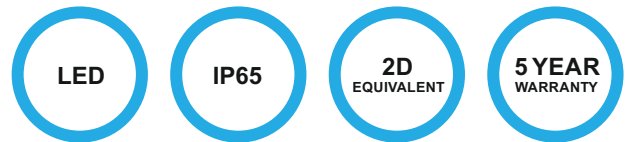

TECHNICAL DETAILS

Part Number	Description	Replaces	Weight (kg)	No. Per 10A Breaker	Inrush Current (A)	Circuit Watts (W)	Board Lumens	Luminaire Lumens	LI/cW
RDF-R14W48504K-HE	10W White Circular Body	28W 2D	3.18	65	8A 80µs	10	1734	1335	133.5
RDF-R14W48704K-HE	14W White Circular Body	38W 2D	3.18	40	10A 100µs	14	2428	1870	133.5
RDF-R14W48104K-HE	21 White Circular Body	38W 2D	3.18	40	10A 100µs	21	3642	2804	133.5
RDF-R14B48504K-HE	10W Black Circular Body	28W 2D	3.18	65	8A 80µs	10	1734	1335	133.5
RDF-R14B48704K-HE	14W Black Circular Body	28W 2D	3.18	65	8A 80µs	14	2428	1870	133.5
RDF-R14B48104K-HE	21W Black Circular Body	38W 2D	3.18	45	10A 100µs	21	3642	2804	133.5

OPTIONS AND ACCESSORIES

- EM** Integral Emergency (1W)
- EMST** Integral Emergency Self Test (1W)
- EMD2** Integral Emergency DATA2 (1W)
- EMCB** Addressable TM Central Battery
- PC** Integral Photocell
- CF** Corridor Function
- MWP** Remotely Programmable Microwave
- WL** Wireless Control System
- WLEM** Wireless Emergency Monitoring
- DD** SwitchDIM/DALI
- EL** Eyelid Attachment
- 3K** 3000K Colour Temperature
- 5K** 5000K Colour Temperature

PHOTOMETRIC AND DIMENSION

