




Lighting-Power-Control

ONTEC E E1P 301 M ST W

Part Code: RDF-TM-OE.EPSTM300W

Surface Mount 25m Exit Sign with Fully Recessed Option

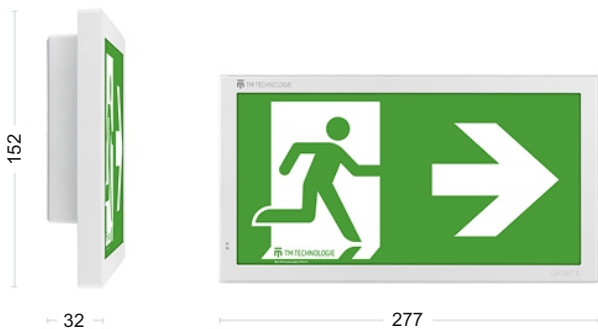

PARAMETERS

Standards	EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 55015, EN 61000-3-2, EN 62031, EN 62471, EN 1838
Warranty	5 years battery 2 years
IP	IP20
IK	IK05
Version	ST – standard
Power supply	210 to 250 V AC 50 to 60 Hz
Temperature range	+10 to 35 °C
Material	PC
Colour	white (also in black and other colours)
Duration time	3 hour
Operating mode	M (maintained)
Maximum light power	1.0 W
Active power	3.0 W
Insulation class	2
Luminance	>300 cd/m ²
Viewing Distance	25 m (larger sizes available)
Battery	LiFePO ₄ /C 3.2V 1.5Ah

FEATURES

- auto-test (self-test), addressable, DATA2 and DALI versions available for all ONTEC E variants
- Recessing kit available, see RDF website for details

