




Lighting-Power-Control

ONTEC R M2 302 M AT

Part Code: RDF-TM-OR.M2ATM300W

Surface-Mount High Output Downlight with Auto-Test and Multiple Options

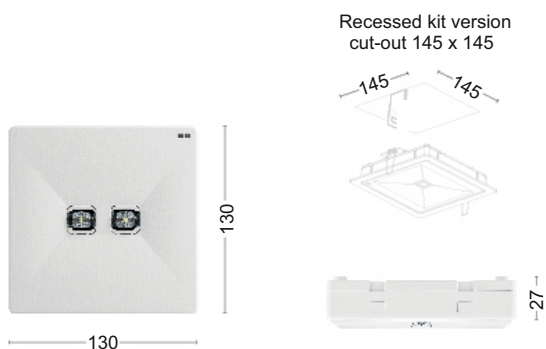

PARAMETERS

Standards	EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 55015, EN 61000-3-2, EN 62031, EN-62471, EN 1838
Warranty	3 years battery 3 years
IP	IP20
IK	IK03
Version	high output, auto-test (self-test)
Power supply	210 to 250 V AC 50 to 60 Hz
Temperature range	+10 to 35 °C
Material	PC
Colour	white (also in black and other colours)
Duration time	3 hour
Operating mode	M (maintained / non-maintained)
Maximum light power	2.0 W
Active power	7.2 W
Insulation class	2
Luminous flux	288 lm
Battery	LiFePO ₄ /C 6.4V 1.5Ah

FEATURES


- Compact design contains the LED lens, driver electronics and battery within the fitting
- Versions also available with standard (key-test), DATA2 addressable, DALI emergency and central battery
- Also available with a variety of corridor and directional lenses
- Recessing kit available, contact us for details.



ONTEC R M2 302 M AT

Part Code: RDF-TM-OR.M2ATM300W

Surface-Mount High Output Downlight with Auto-Test and Multiple Options

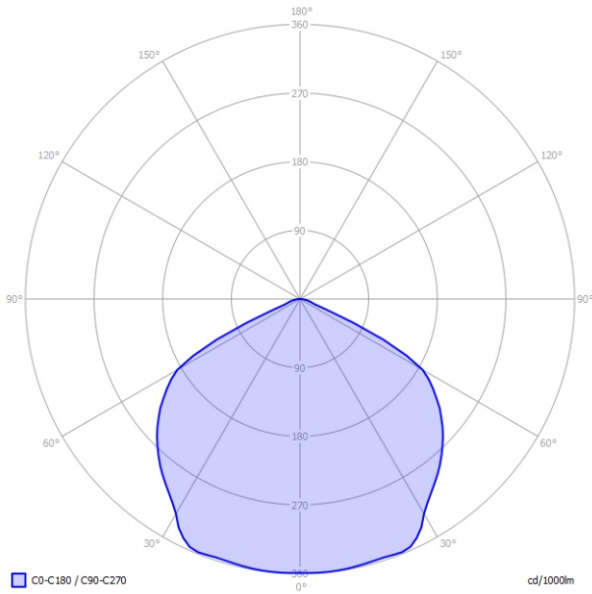

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2.5	3.8	8.3
3.0	4.3	9.4
4.0	4.9	11.6
5.0	5.1	13.3
6.0	5.2	14.5
7.0	5.3	15.8
8.0	5.2	16.0
9.0	5.0	16.4
10.0	4.9	16.6

