



Lighting-Power-Control

# ITECH M2 302 M AT

Part Code: RDF-IT.M2.AT006

Surface-Mount 170mm Round Downlight with Auto-Test and Multiple Options



Recessed version  
cut out

Ø 155



## PARAMETERS

Standards	EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 55015, EN 61000-3-2, EN 62031, EN 62471, EN 1838
Warranty	5 years battery 2 years
IP	IP65
IK	IK06
Version	AT – automatic test (self-test)
Power supply	210 to 250 V AC 50 to 60 Hz
Temperature range	+10 to 40 °C
Material	PC
Colour	white (available in black and other colours)
Duration time	3h
Operating mode	M (maintained / non-maintained)
Maximum light power	2.0 W
Active power	6.4 W
Insulation class	2
Luminous flux	270 lm
Battery	LiFePO <sub>4</sub> /C 6.4V 1.5Ah


- ITECH versions also available including standard (no-test), addressable and DALI
- Multiple options including higher light output and corridor lens available
- Recessing kit also available, contact us for details



# ITECH M2 302 M AT

Part Code: RDF-IT.M2.AT006

Surface-Mount 170mm Round Downlight with Auto-Test and Multiple Options

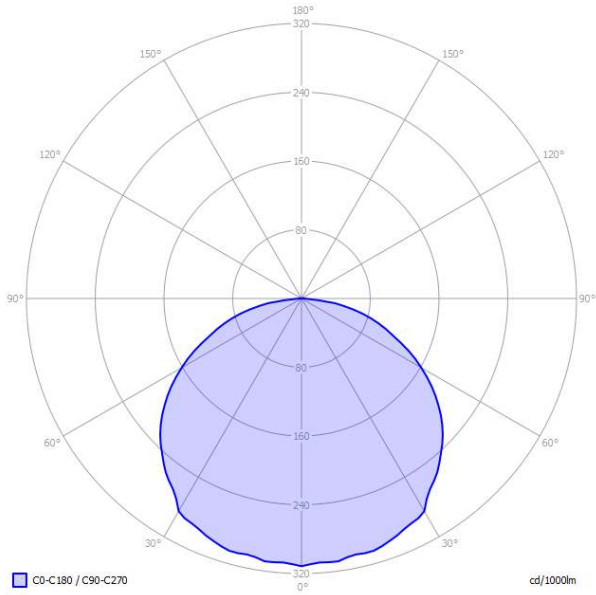

## PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2.5	4.0	9.3
3.0	4.2	10.5
4.0	4.5	12.0
5.0	4.7	13.5
6.0	4.9	14.4
7.0	4.8	15.0
8.0	4.8	15.7
9.0	4.7	16.0
10.0	4.5	16.2

