




Lighting-Power-Control

ONTEC C M1 301 M AT

Part Code: RDF-OC.M1.AT005

Recessed 90mm Circular Downlight with Auto-Test and Multiple Options

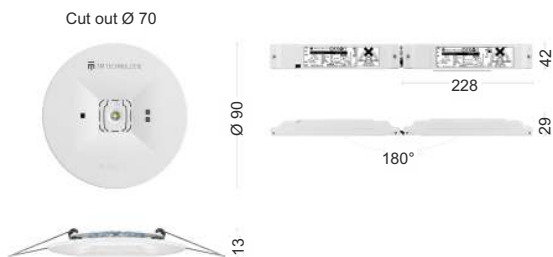

PARAMETERS

Standards	EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 55015, EN 61000-3-2, EN 62031, EN-62471, EN 1838
Warranty	5 years battery 2 years
IP	IP20
IK	IK03
Version	AT – automatic test (self test)
Power supply	210 to 250 V AC 50 to 60 Hz
Temperature range	+10 to 35 °C
Material	PC
Colour	white (available in black and other colours)
Duration time	3h
Operating mode	M (maintained / non-maintained)
Maximum light power	2.7 W
Active power	4.2 W
Insulation class	2
Luminous flux	140 lm
Battery	Ni-Cd HT 3.6V 1.5Ah

- Standard (no-test), addressable and DALI versions available for all ONTEC C variants
- Multiple options including higher light output and corridor lens available, see RDF website for details




ONTEC C M1 301 M AT

Part Code: RDF-OC.M1.AT005

Recessed 90mm Circular Downlight with Auto-Test and Multiple Options

PHOTOMETRY

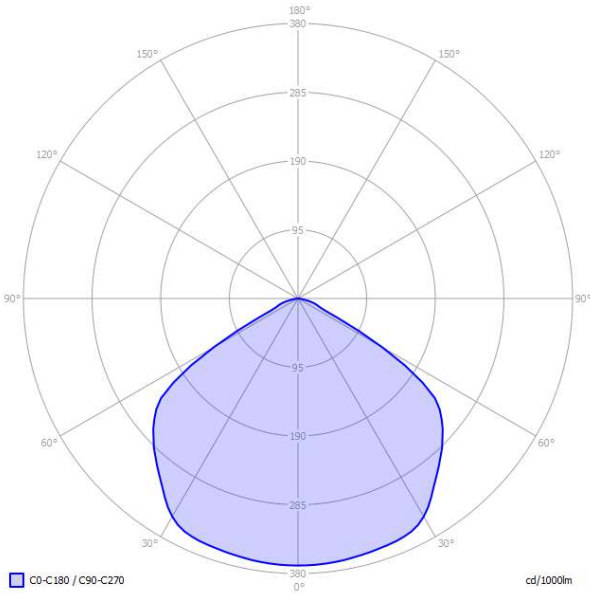

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2.5	3.2	7.0
3.0	3.5	8.0
4.0	3.9	9.5
5.0	3.9	11.2
6.0	3.7	12.2
7.0	3.4	12.6
8.0	3.3	12.4
9.0	3.0	12.0
10.0	2.8	11.2

